

# **EXHIBIT A**

US006241754B1

(12) **United States Patent**  
**Swanson et al.**

(10) **Patent No.:** **US 6,241,754 B1**  
(45) **Date of Patent:** **\*Jun. 5, 2001**

(54) **COMPOSITE STRUCTURES AND METHODS FOR ABLATING TISSUE TO FORM COMPLEX LESION PATTERNS IN THE TREATMENT OF CARDIAC CONDITIONS AND THE LIKE**

(75) Inventors: **David K. Swanson**, Mountain View; **Sidney D. Fleischman**; **Thomas F. Kordis**, both of Sunnyvale; **David L. McGee**, Palo Alto, all of CA (US)

(73) Assignee: **EP Technologies, Inc.**, San Jose, CA (US)

(\*) Notice: This patent issued on a continued prosecution application filed under 37 CFR 1.53(d), and is subject to the twenty year patent term provisions of 35 U.S.C. 154(a)(2).

Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **08/752,162**

(22) Filed: **Nov. 18, 1996**

#### Related U.S. Application Data

(62) Division of application No. 08/528,805, filed on Sep. 15, 1995, now Pat. No. 5,575,810, which is a continuation of application No. 08/137,672, filed on Oct. 15, 1993, now abandoned.

(51) **Int. Cl.<sup>7</sup>** ..... **A61F 7/12**  
(52) **U.S. Cl.** ..... **607/99; 600/373; 607/122**  
(58) **Field of Search** ..... 607/99, 101, 116, 607/119, 122, 125, 126, 127, 148; 606/32, 41, 45, 47; 600/373

#### (56) References Cited

##### U.S. PATENT DOCUMENTS

2,245,880 6/1941 Tipton et al. .  
3,230,957 1/1966 Seifert .

(List continued on next page.)

##### FOREIGN PATENT DOCUMENTS

0 317 489 11/1988 (EP) .  
8906148 7/1989 (WO) .  
9304734 3/1993 (WO) .

##### OTHER PUBLICATIONS

Delivery of Radiofrequency Energy to all Four Poles of a Catheter Increases Lesion Size; S. Mackey et al., p. 3119.

(List continued on next page.)


*Primary Examiner*—Brian L. Casler

(74) *Attorney, Agent, or Firm*—Henricks, Slavin & Holmes LLP

#### (57) ABSTRACT

A method of ablating tissue in the heart to treat atrial fibrillation introduces into a selected atrium an energy emitting element. The method exposes the element to a region of the atrial wall and applies ablating energy to the element to thermally destroy tissue. The method forms a convoluted lesion pattern comprising elongated straight lesions and elongated curvilinear lesions. The lesion pattern directs electrical impulses within the atrial myocardium along a path that activates the atrial myocardium while interrupting reentry circuits that, if not interrupted, would cause fibrillation. The method emulates the surgical maze procedure, but lends itself to catheter-based procedures that do not require open heart surgical techniques. A composite structure for performing the method is formed using a template that displays in planar view a desired lesion pattern for the tissue. An array of spaced apart element is laid on the template. Guided by the template, energy emitting and non-energy emitting zones are formed on the elements. By overlaying the elements, the composite structure is formed, which can be introduced into the body to ablate tissue using catheter-based, vascular access techniques.

**53 Claims, 31 Drawing Sheets**

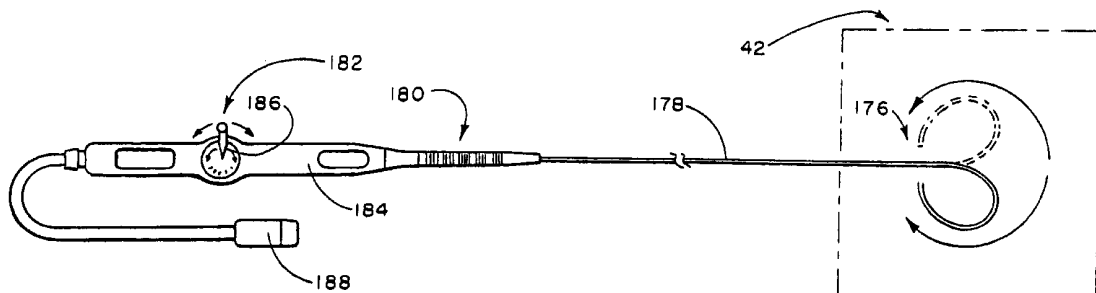

## US 6,241,754 B1

Page 2

## U.S. PATENT DOCUMENTS

3,769,984	11/1973	Muench .	5,334,193	8/1994	Nardella .
4,481,953	11/1984	Gold et al. .	5,341,807	8/1994	Nardella .
4,522,212	6/1985	Gelinas et al. .	5,345,936	9/1994	Pomeranz et al. .
4,532,924	8/1985	Auth et al. .	5,348,554	9/1994	Imran et al. .
4,641,649	2/1987	Walinsky et al. .	5,354,297	10/1994	Avitall .
4,643,186	2/1987	Rosen et al. .	5,357,956	10/1994	Nardella .
4,660,571	4/1987	Hess et al. .	5,358,478	10/1994	Thompson .
4,677,990	7/1987	Neubauer .	5,365,926	11/1994	Desai .
4,699,147	10/1987	Chilson et al. .	5,366,443	11/1994	Eggers et al. .
4,724,836	2/1988	Okada .	5,370,644	12/1994	Langberg .
4,759,378	7/1988	Swendson et al. .	5,370,678	12/1994	Edwards et al. .
4,765,331	8/1988	Petruzzi et al. .	5,383,874	1/1995	Jackson et al. .
4,860,769	8/1989	Fogarty et al. .	5,383,917	1/1995	Desai et al. .
4,892,102	1/1990	Astrinsky .	5,397,341	3/1995	Hirschberg .
4,913,142	4/1990	Kittrell et al. .	5,403,311	4/1995	Abele .
4,934,049	6/1990	Kiekhafer .	5,405,346	4/1995	Grundy et al. .
4,940,064	7/1990	Desai .	5,411,025	5/1995	Webster, Jr. .
5,016,808	5/1991	Heil .	5,433,198	7/1995	Desai et al. .
5,026,959	6/1991	Ito et al. .	5,454,370	10/1995	Avitall .
5,057,106	10/1991	Kasevich et al. .	5,472,441	12/1995	Edwards .
5,078,716	1/1992	Doll .	5,487,385	1/1996	Avitall .
5,101,836	4/1992	Lee .	5,500,012	3/1996	Brucker et al. .
5,117,828	6/1992	Metzger et al. .	5,573,553	11/1996	Struhl .
5,150,717	9/1992	Rosen et al. .	5,582,609	12/1996	Swanson et al. .
5,156,151	10/1992	Imran .	5,607,422	3/1997	Smeets .
5,186,171	2/1993	Kuhry .	5,626,136 *	5/1997	Webster, Jr. .... 600/373
5,192,280	3/1993	Parins .	5,651,780	7/1997	Jackson et al. .
5,197,963	3/1993	Parins .	5,673,695 *	10/1997	McGee et al. .... 600/374
5,215,103	6/1993	Desai .	5,800,428	9/1998	Nelson .
5,228,442 *	7/1993	Imran ..... 600/373	5,800,482	9/1998	Pomeranz .
5,237,996	8/1993	Waldman et al. .			
5,239,999	8/1993	Imran .			
5,242,441	9/1993	Avitall .			
5,255,679 *	10/1993	Imran ..... 600/373			
5,263,493 *	11/1993	Avitall ..... 607/122			
5,265,623	11/1993	Kroll et al. .			
5,275,162	1/1994	Edwards et al. .			
5,281,218	1/1994	Imran .			
5,290,286	3/1994	Parins .			
5,293,868	3/1994	Nardella .			
5,293,869	3/1994	Edwards et al. .			
5,311,866	5/1994	Kagan et al. .			
5,313,943	5/1994	Houser et al. .			
5,322,064	6/1994	Lundquist .			
5,324,284	6/1994	Imran .			
5,327,889	7/1994	Imran .			
5,327,905	7/1994	Avitall .			
5,328,467	7/1994	Edwards et al. .			

## OTHER PUBLICATIONS

Observations on Electrode-Tissue Interface Temperature and Effect on Electrical Impedance During Radiofrequency Ablation of Ventricular Myocardium; D. Haines, pp. 1034-1038.


Catheter Ablation of the Atrioventricular Junction with Radiofrequency Energy; J. Langberg et al., pp. 1527-1535. Radiofrequency Catheter Ablation of Atrial Arrhythmias Results and Mechanisms; M. Lesh, pp. 1074-1089.

Catheter Ablation of Atrial Flutter Using Radiofrequency Energy; H. Calkins et al., p. 2878.


Radiofrequency Catheter Ablation for the Treatment of Human Type 1 Atrial Flutter. Identification of a Critical Zone in the Reentrant Circuit by Endocardial Mapping Techniques; G. Feld.

\* cited by examiner


**FIG. 1**

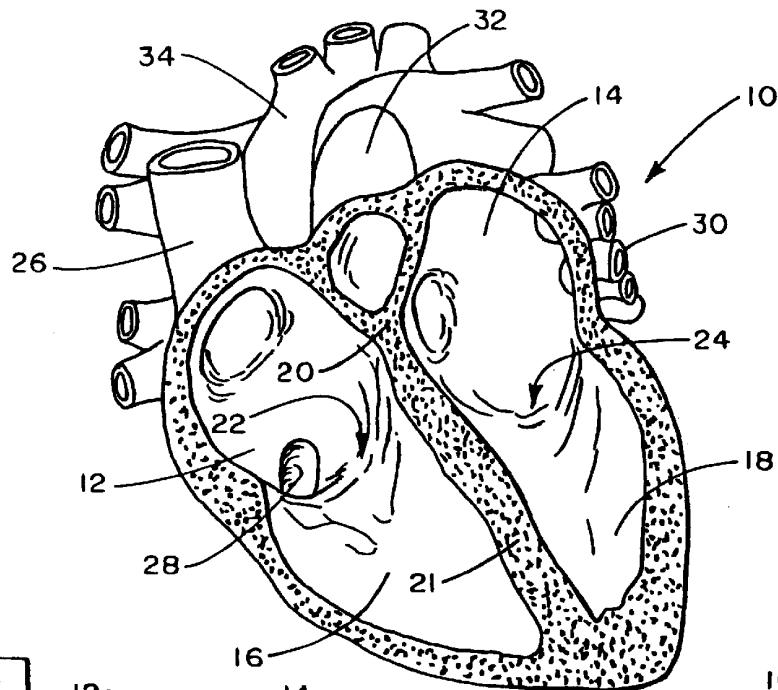


**FIG. 2**

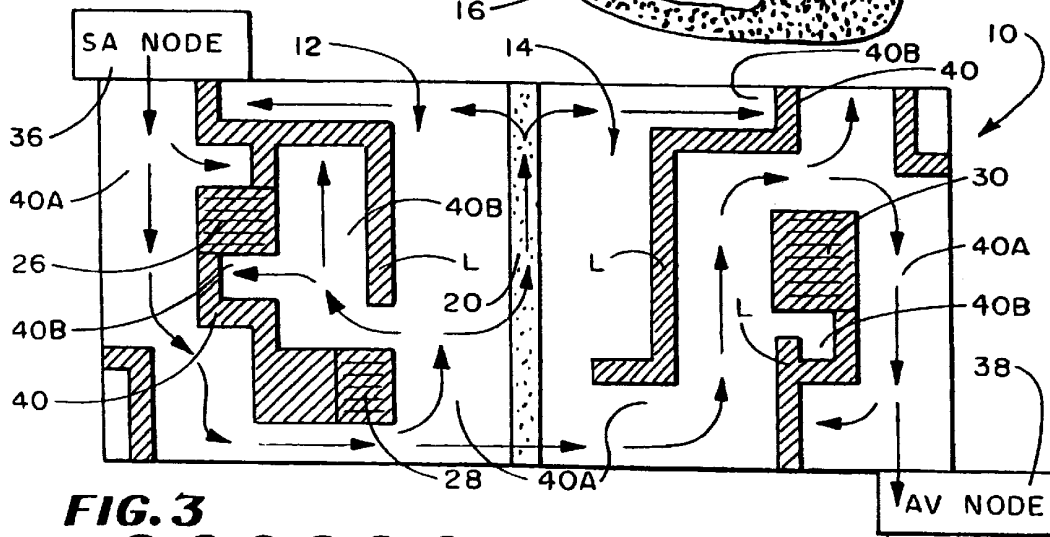


**FIG. 3**

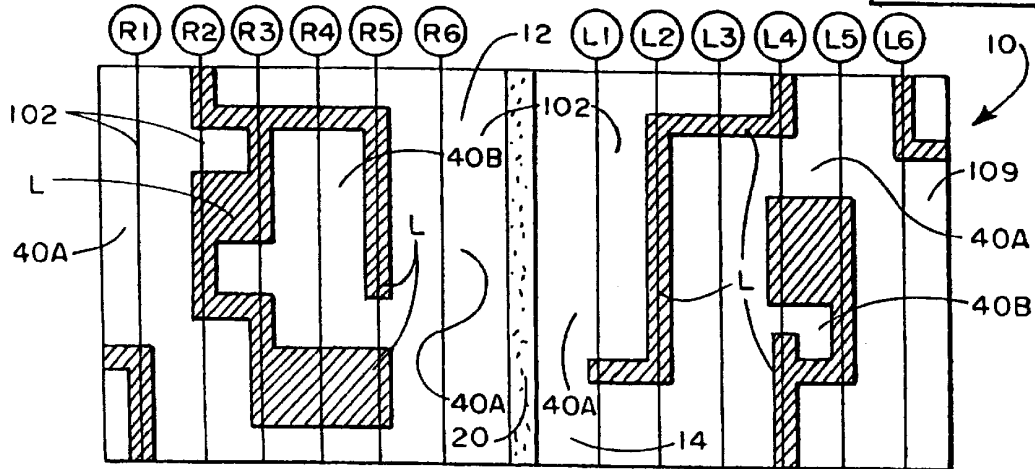


**FIG. 4A**

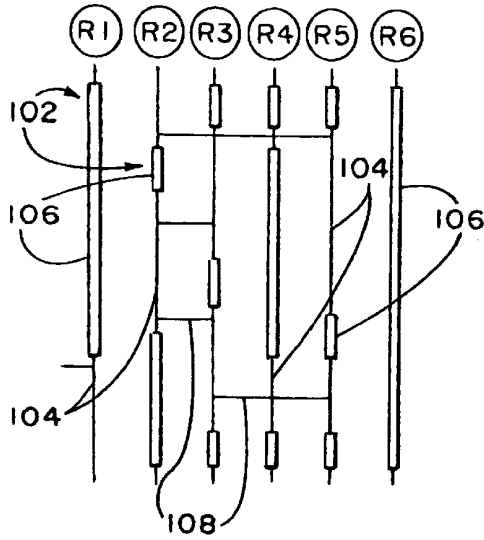


**FIG. 4B**

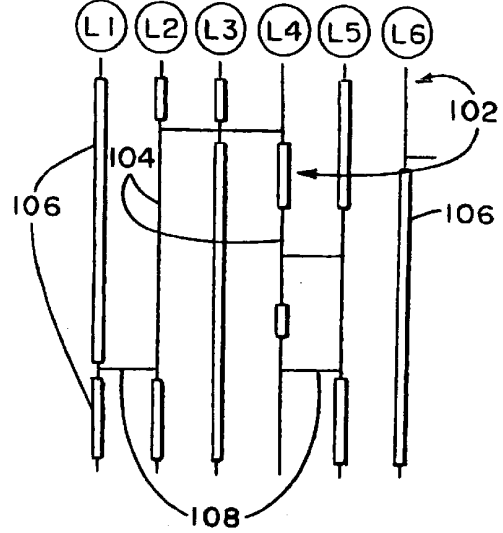


**FIG. 5A**

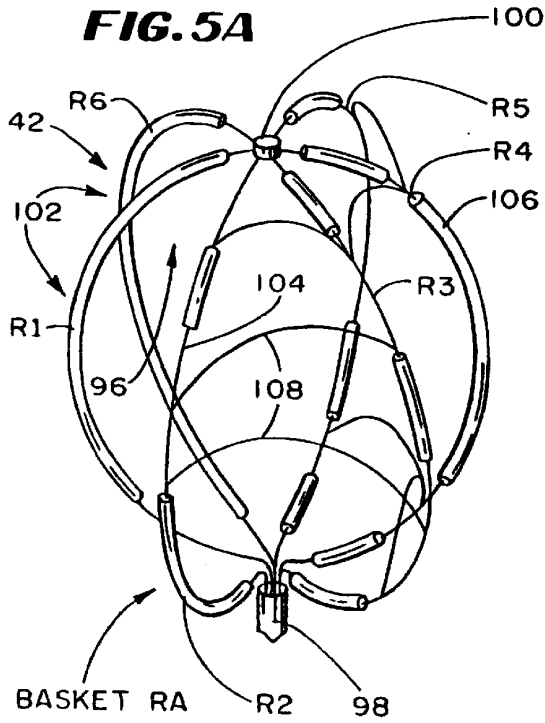


**FIG. 5B**

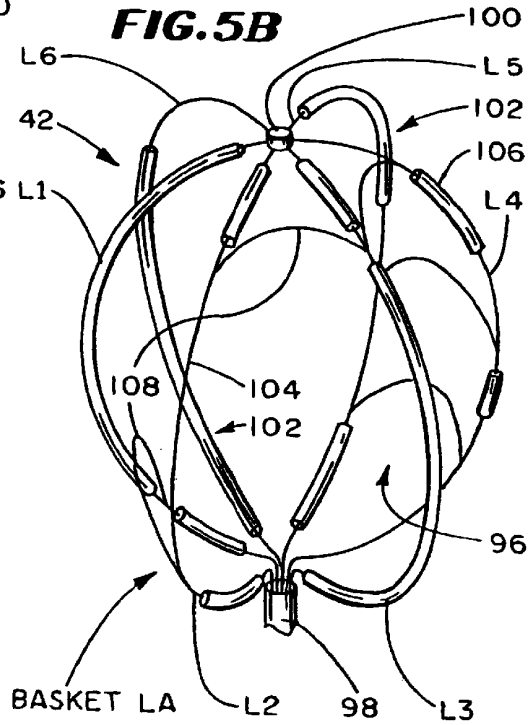


**FIG. 6**

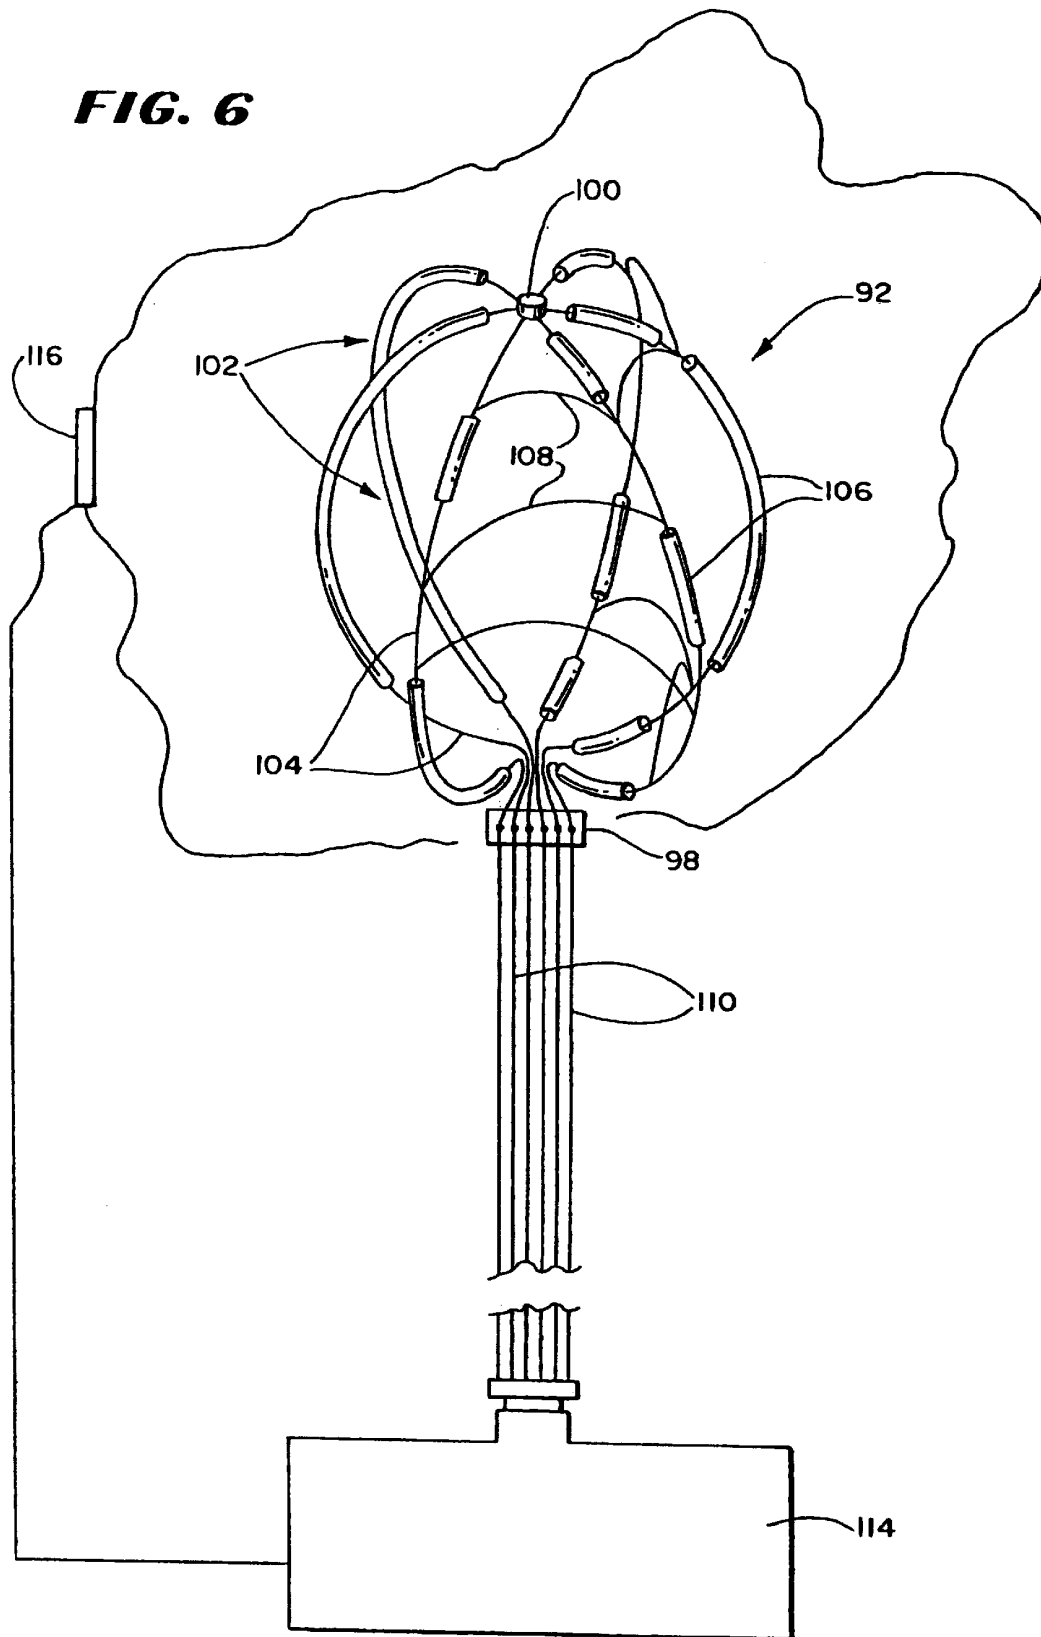


**FIG. 7**

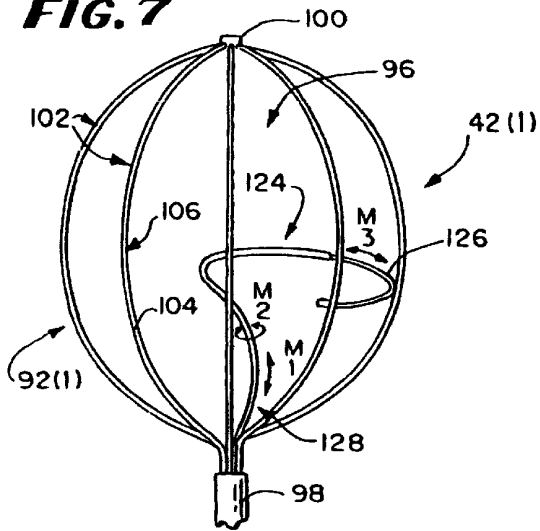


**FIG. 8**

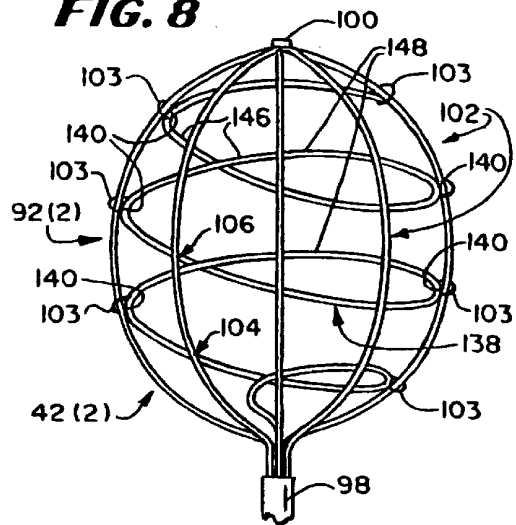


**FIG. 9**

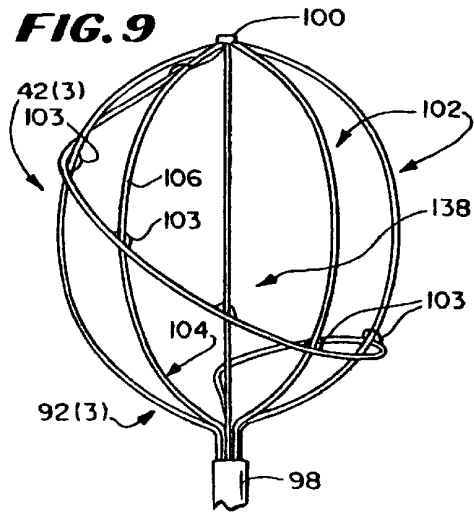

**FIG. 10**

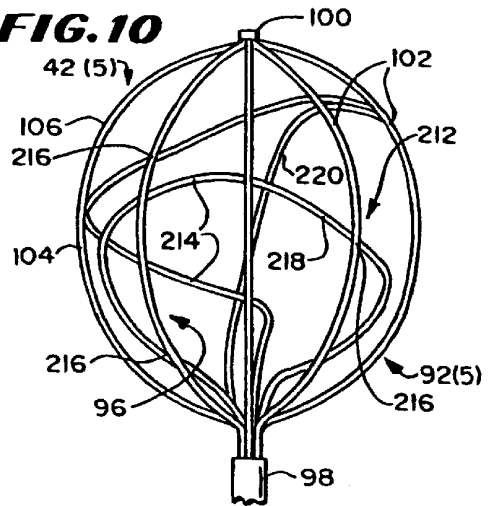


**FIG. 11**

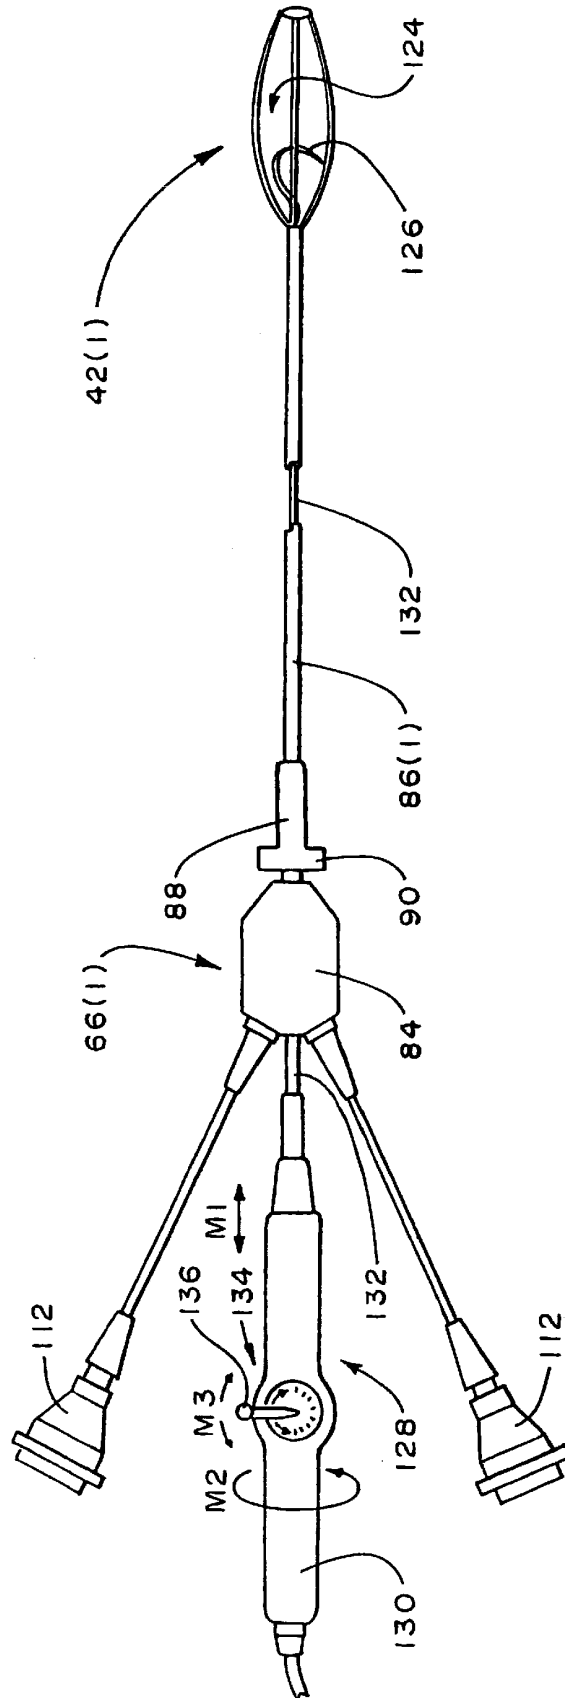





**FIG. 12B**

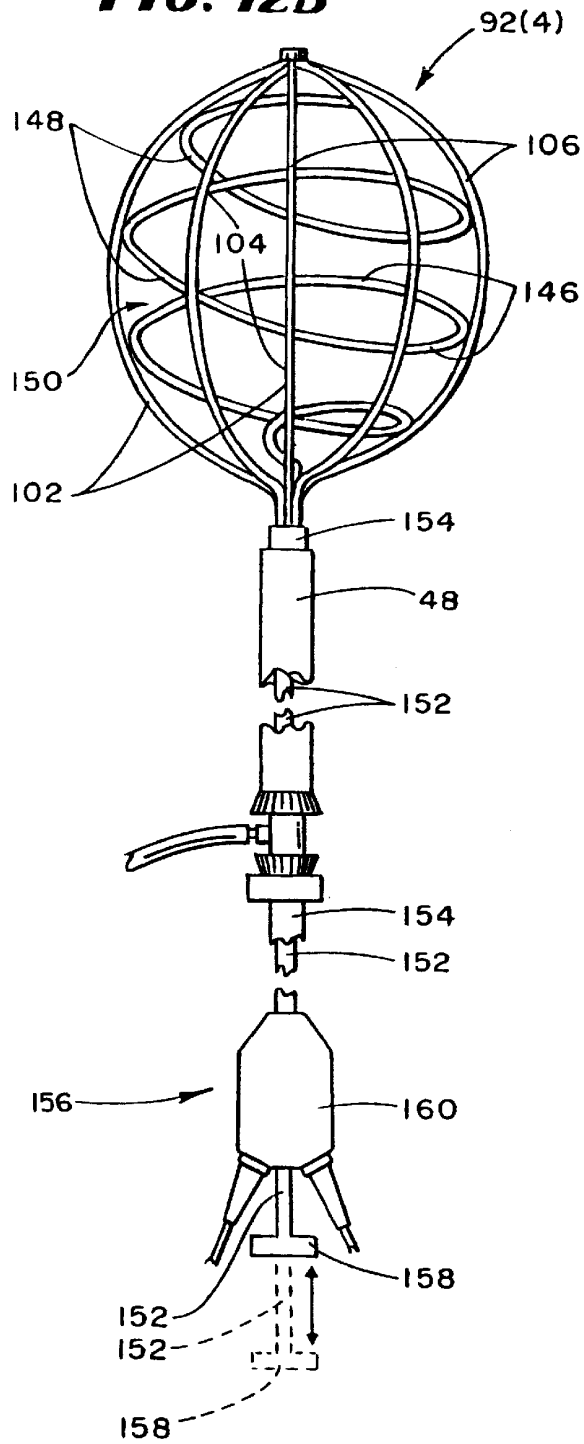


**FIG. 12A**


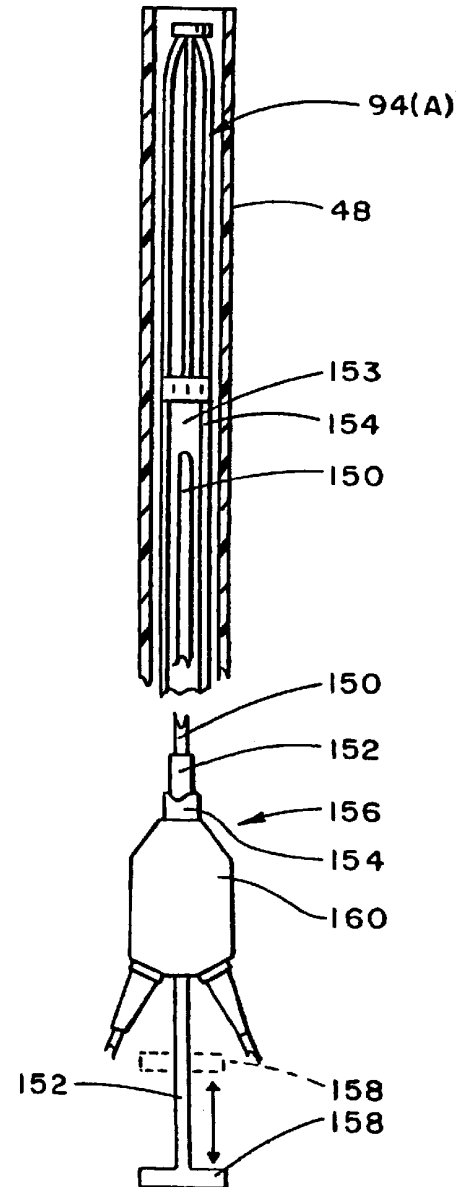



**FIG. 13**

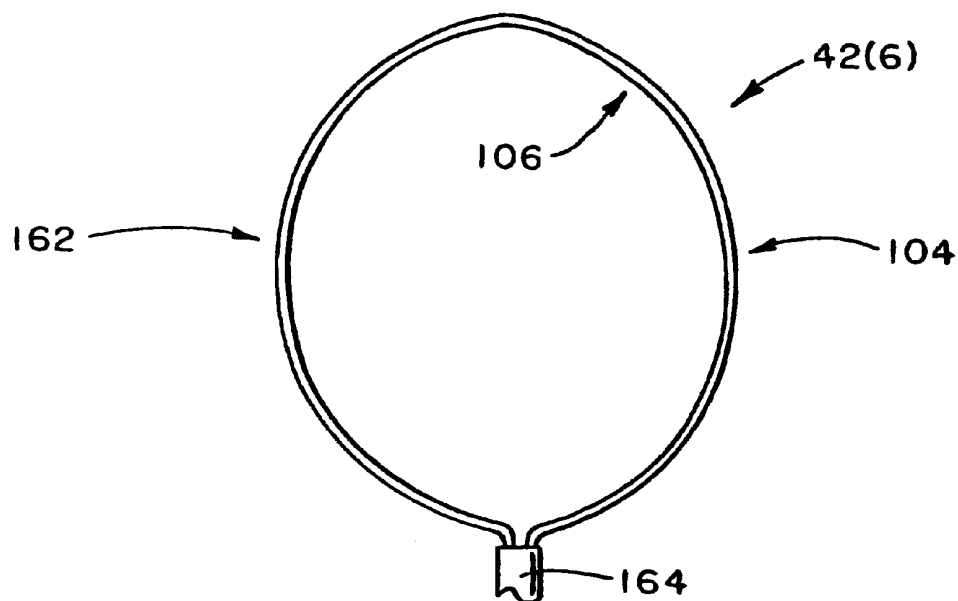



**FIG. 14**

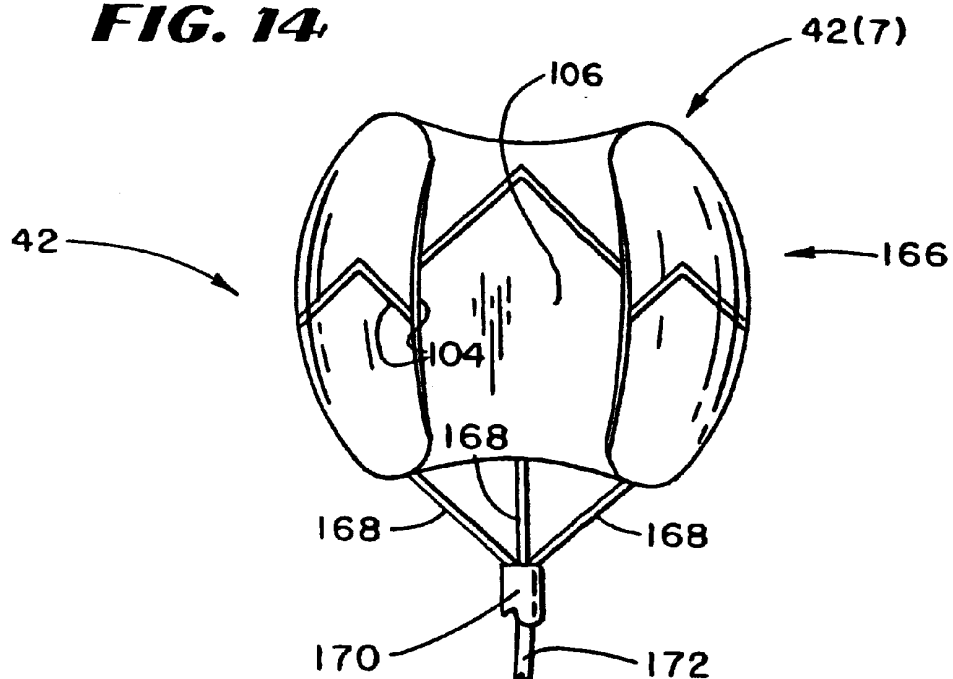

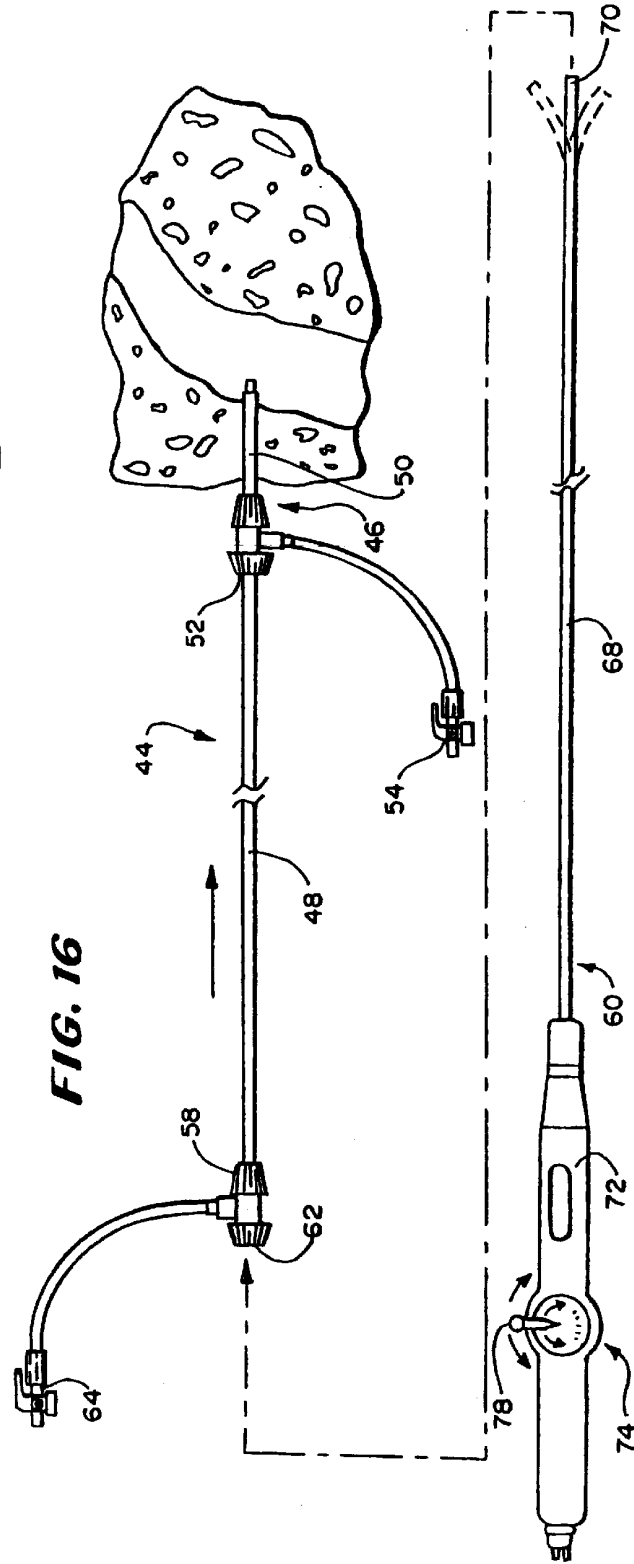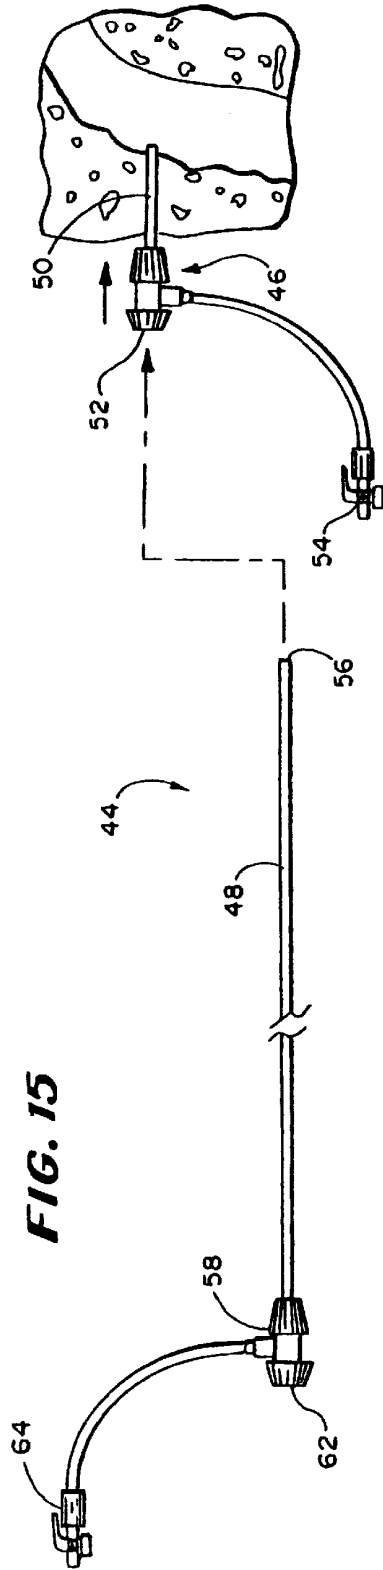


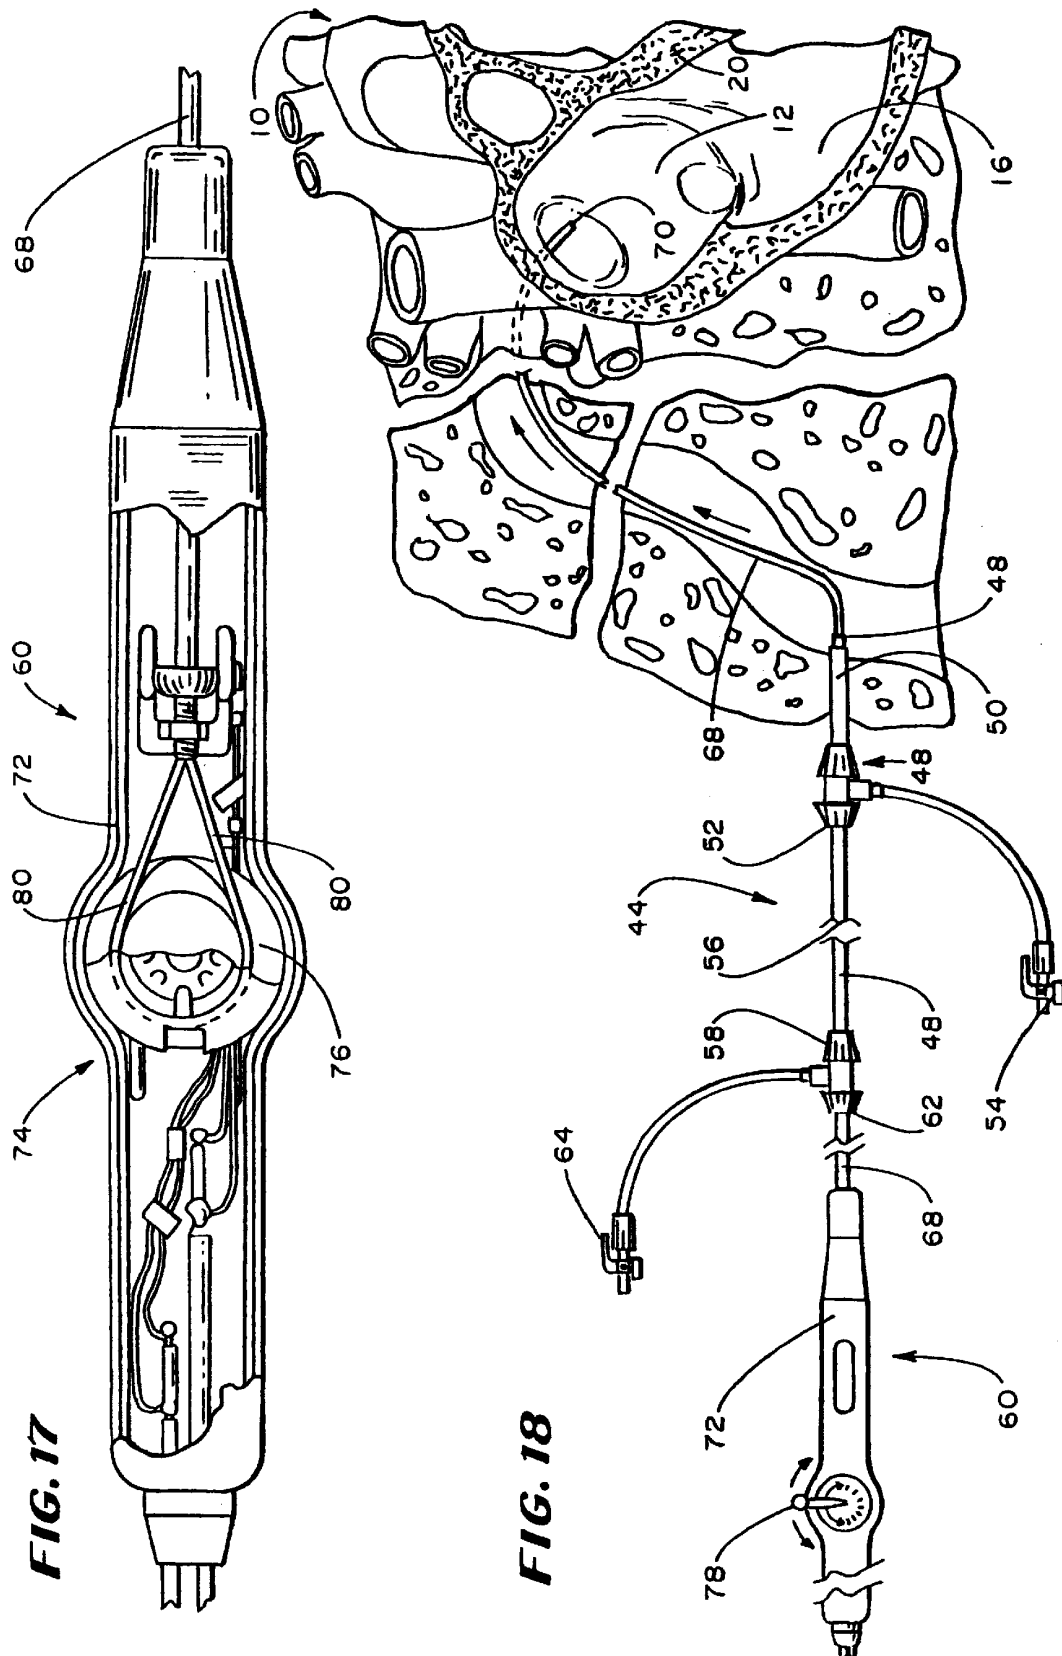


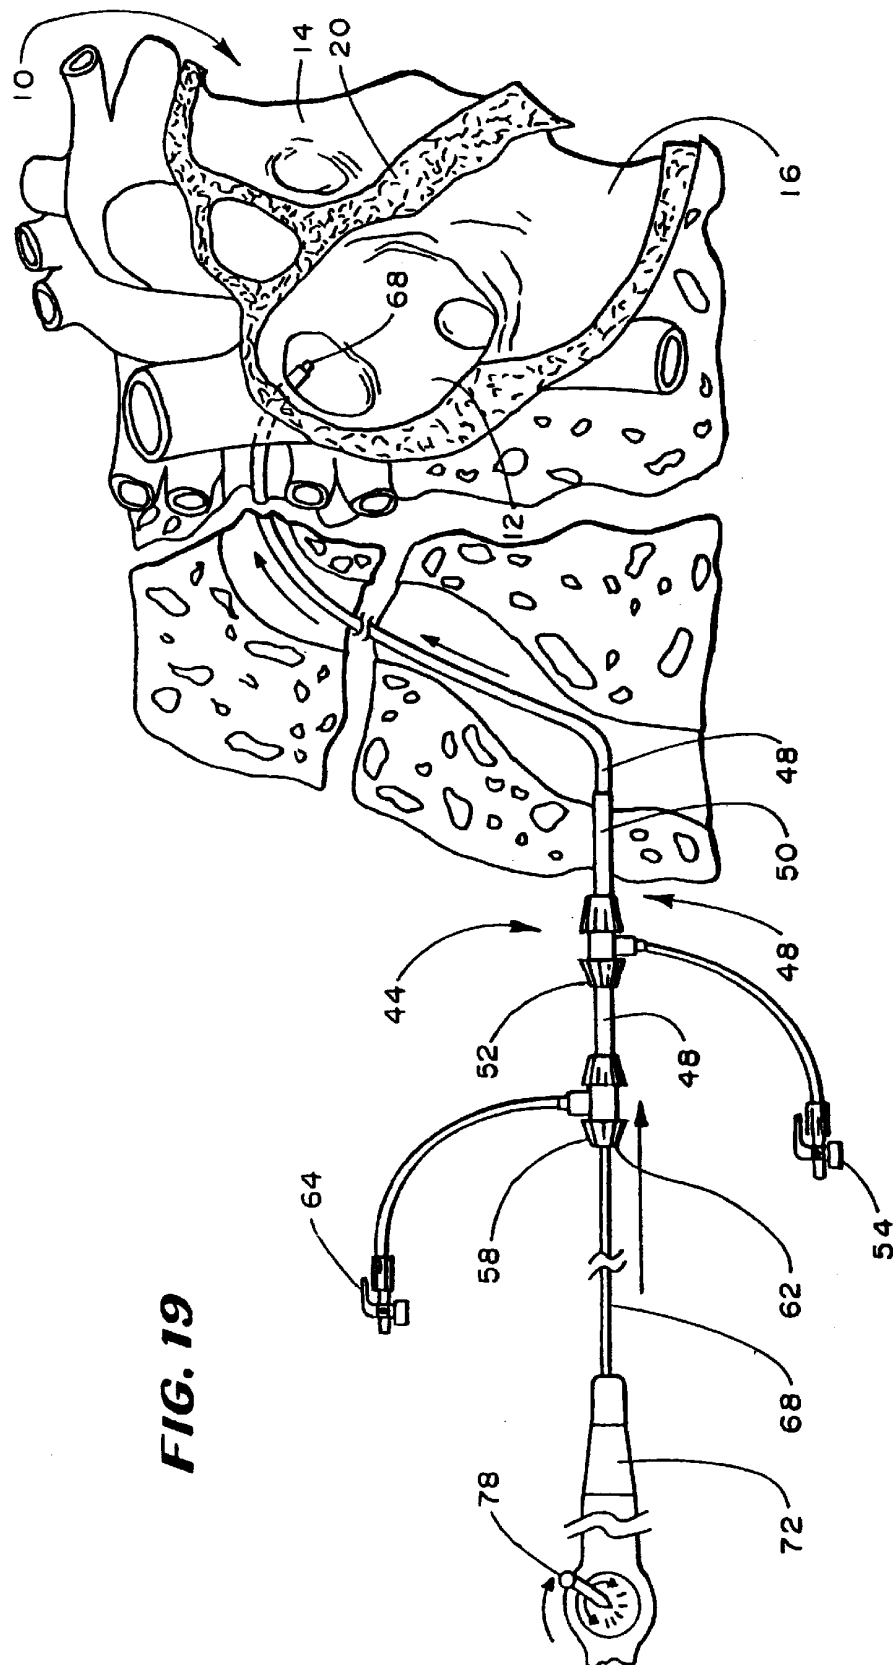

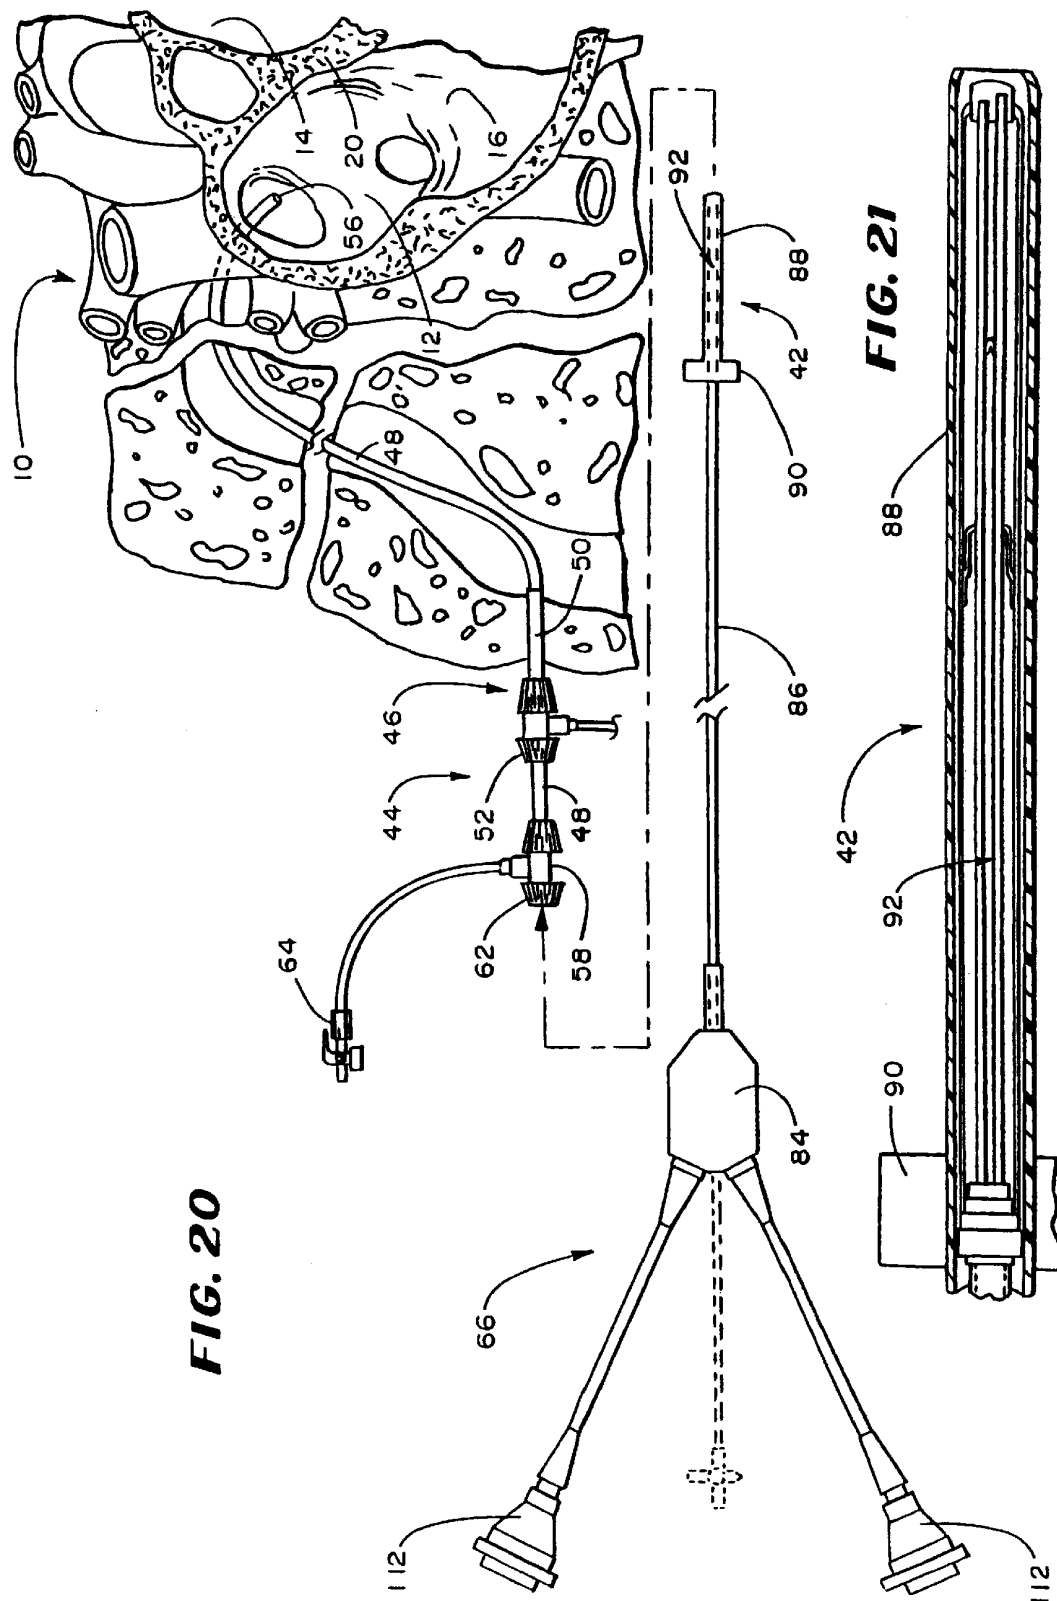


**FIG. 20**

**FIG. 21**

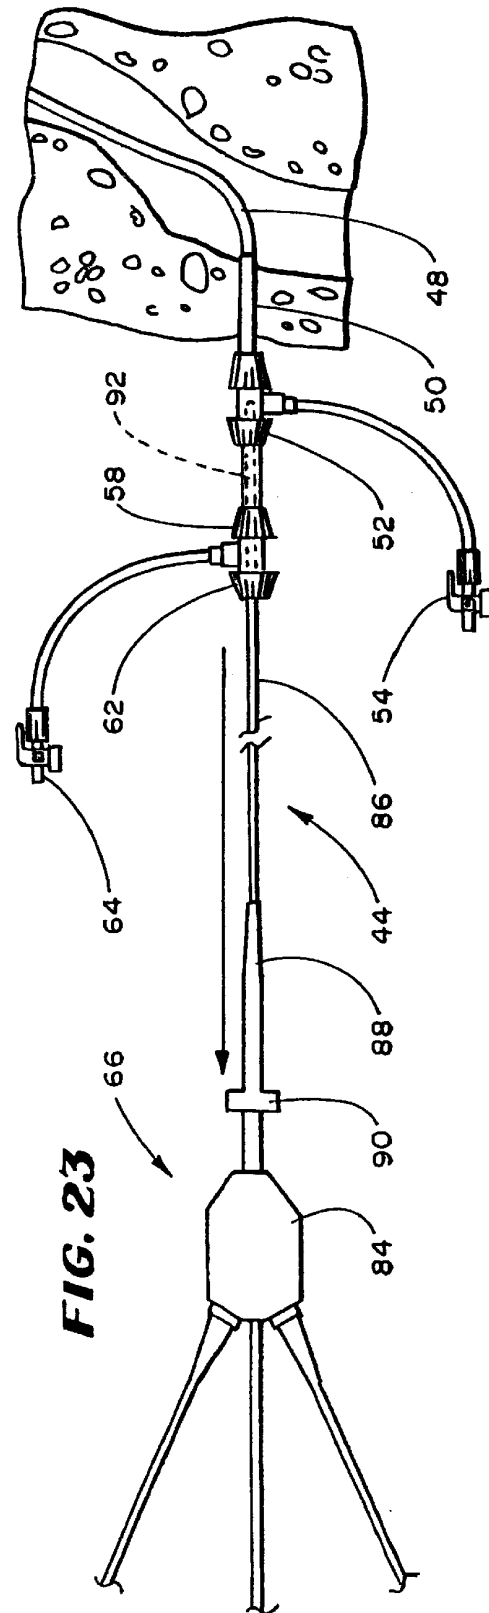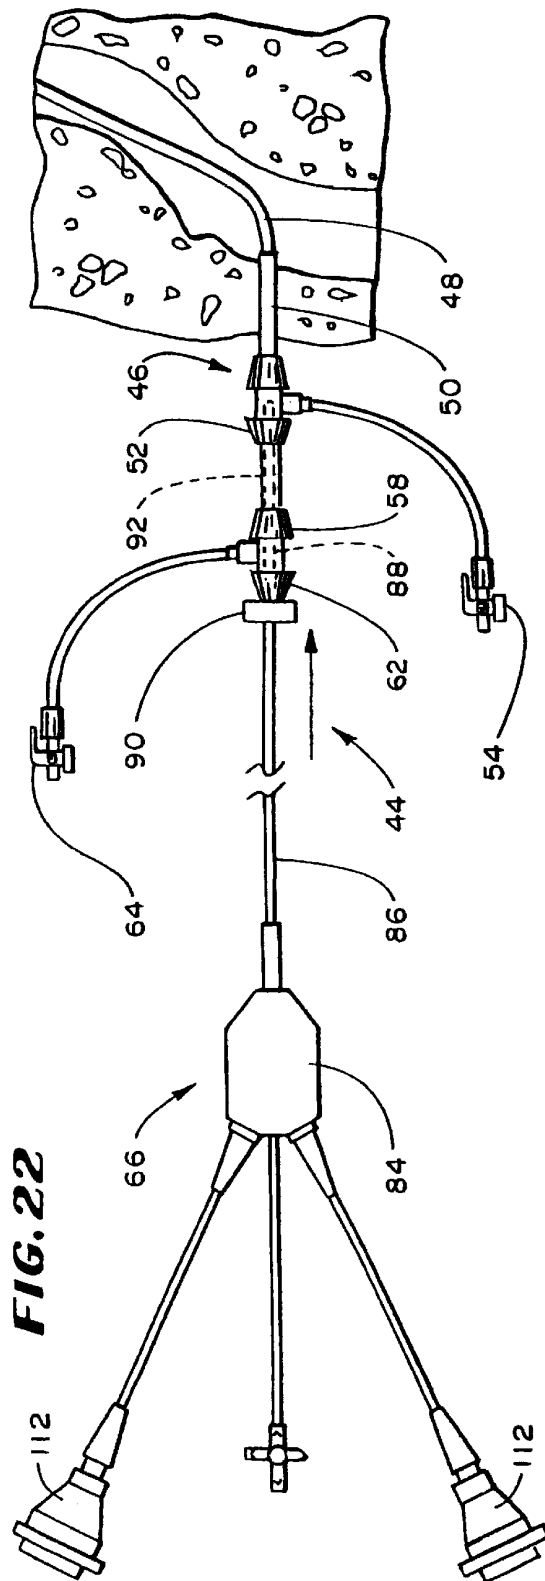


**FIG. 24**

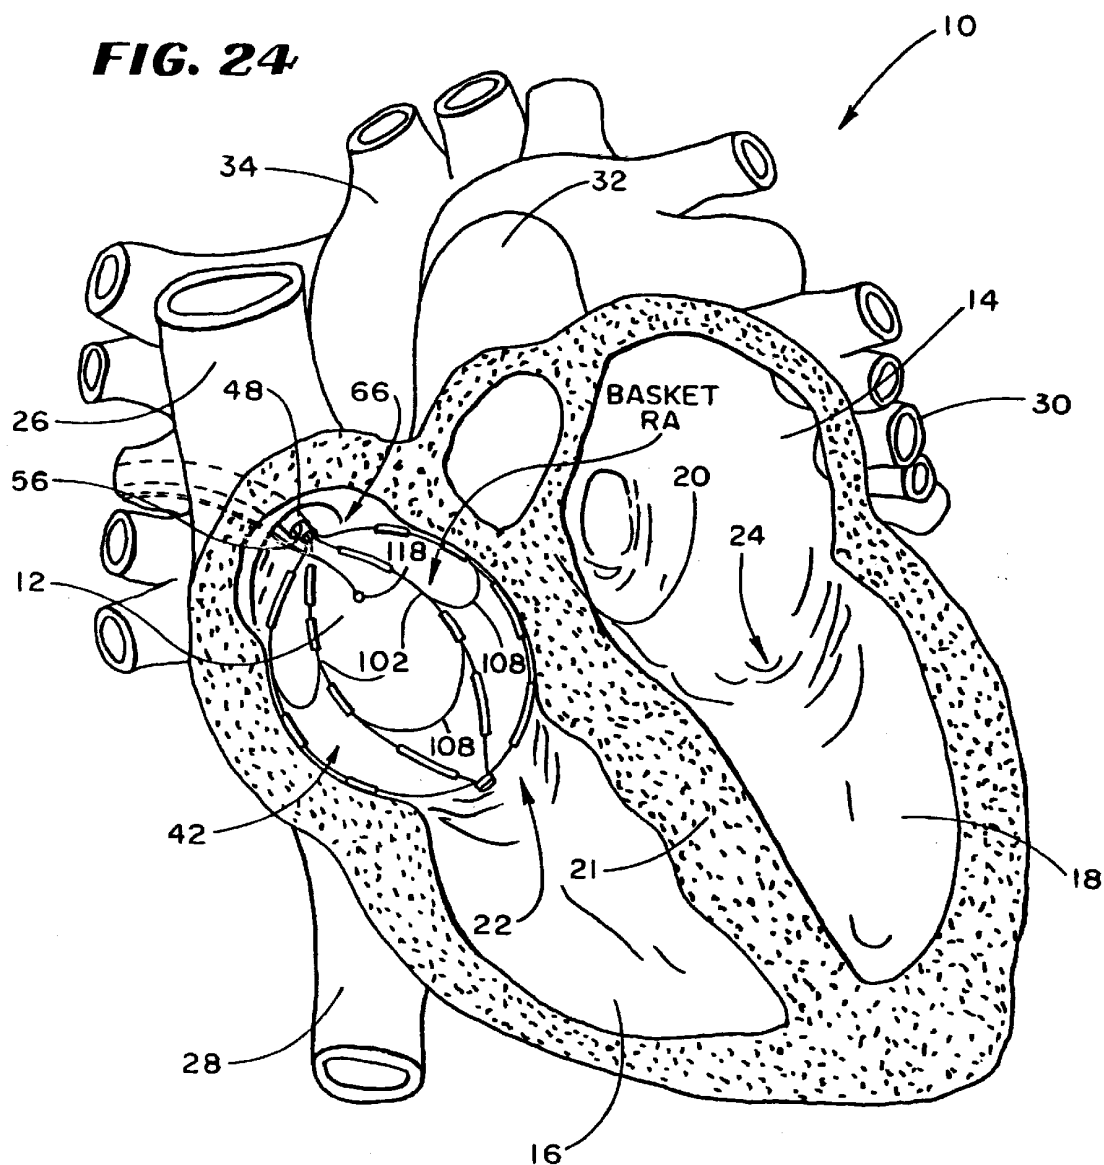





**FIG. 25A**




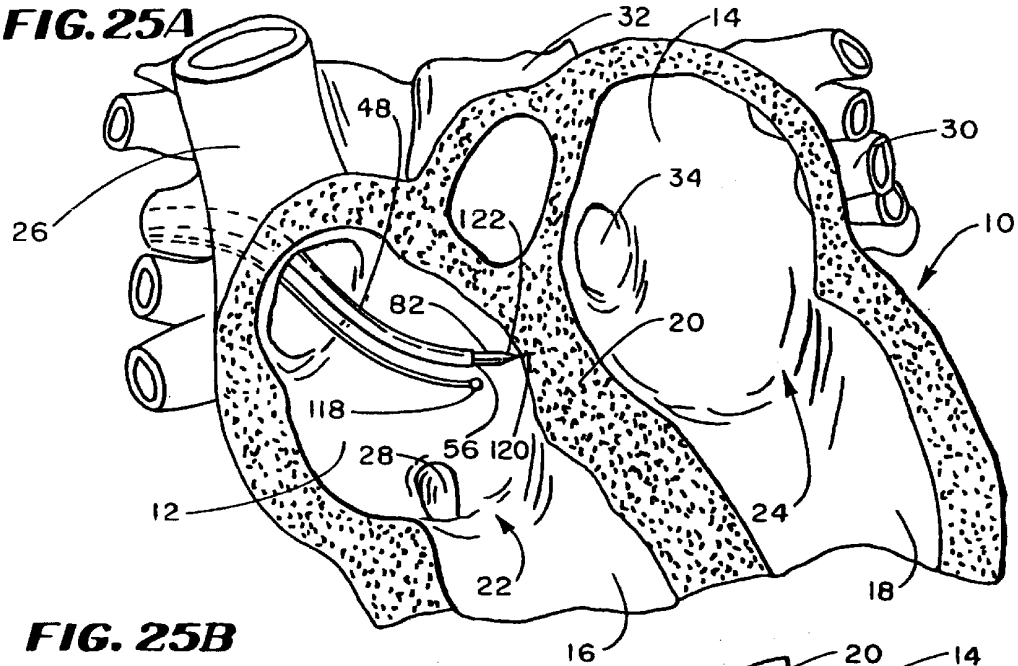


**FIG. 25B**

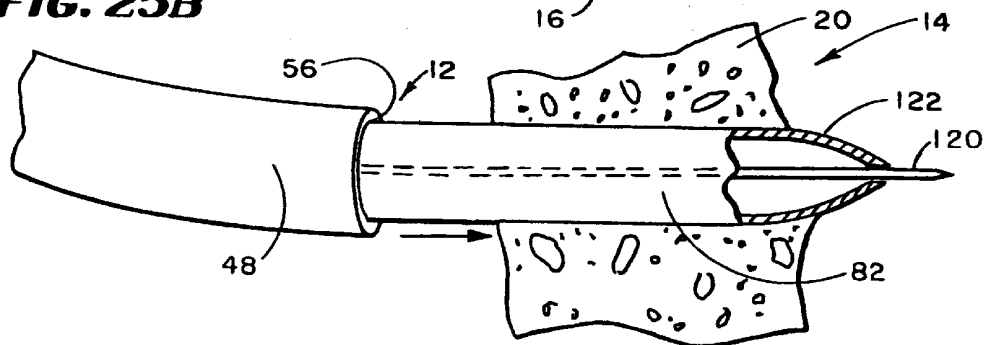


**FIG. 26**

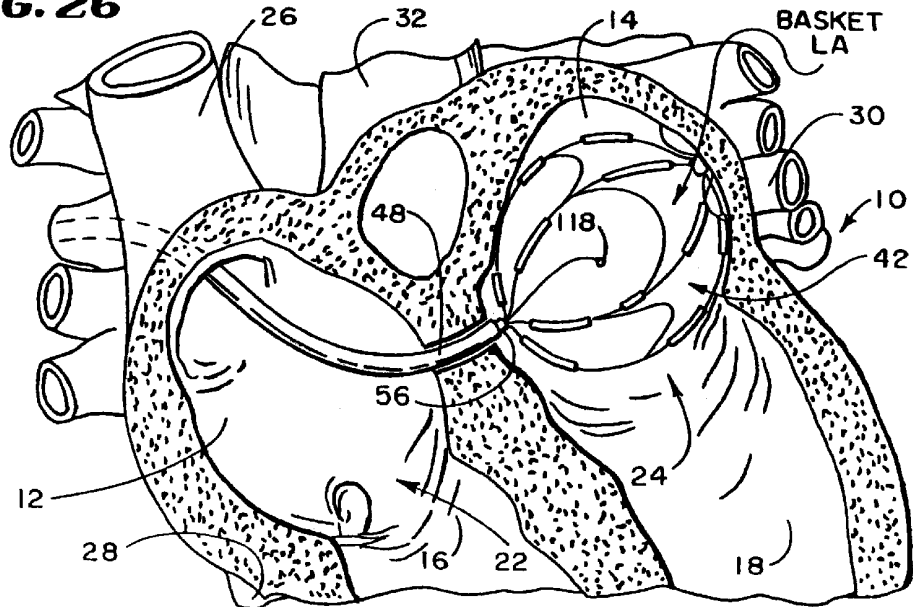


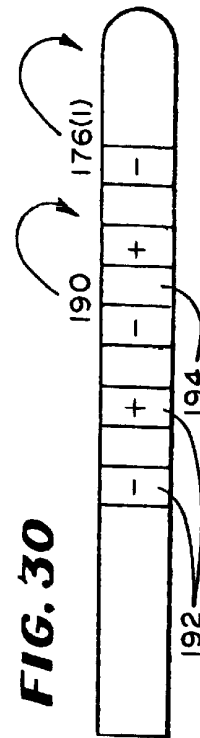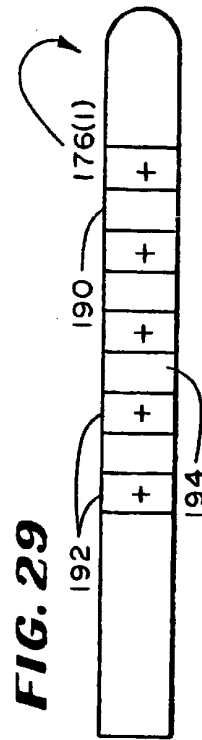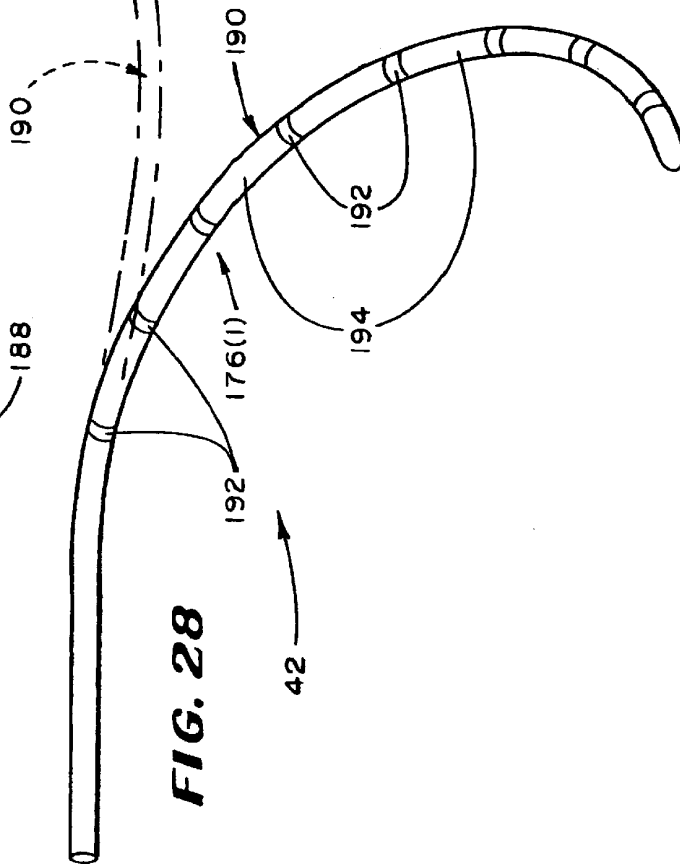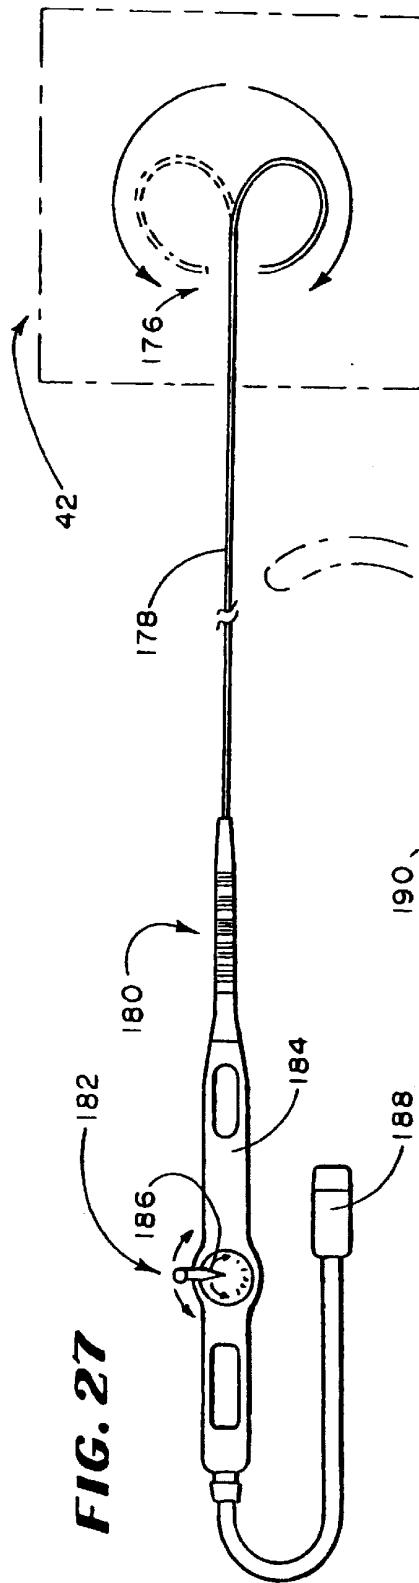


**FIG. 31**

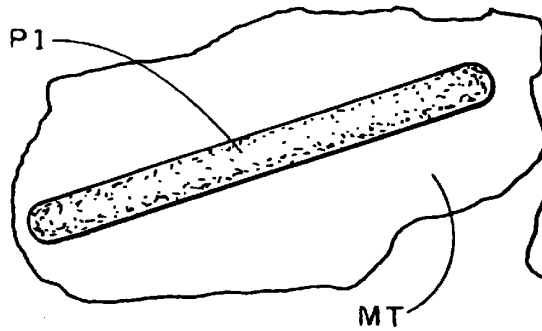


**FIG. 32**

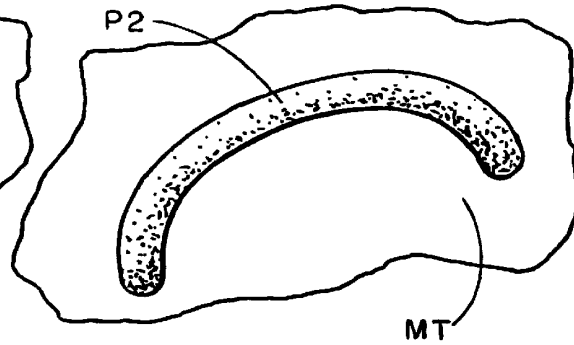


**FIG. 33**

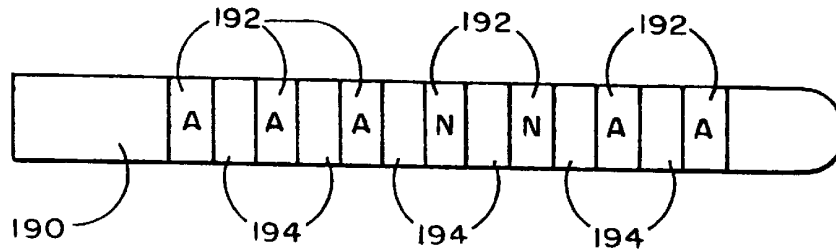


**FIG. 34**

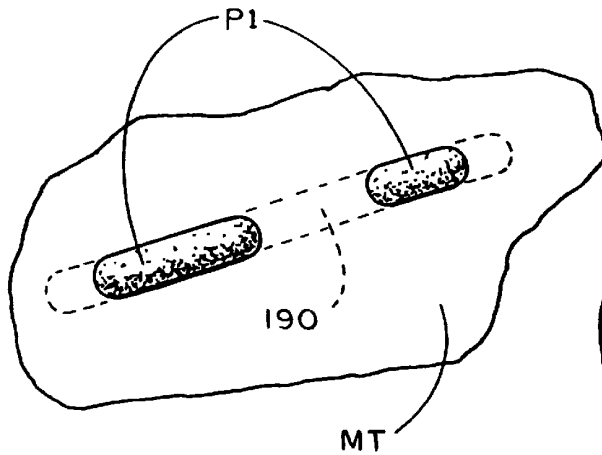


**FIG. 35**

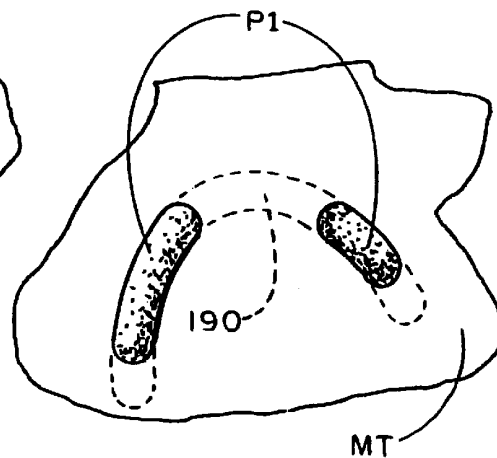


**FIG. 36**

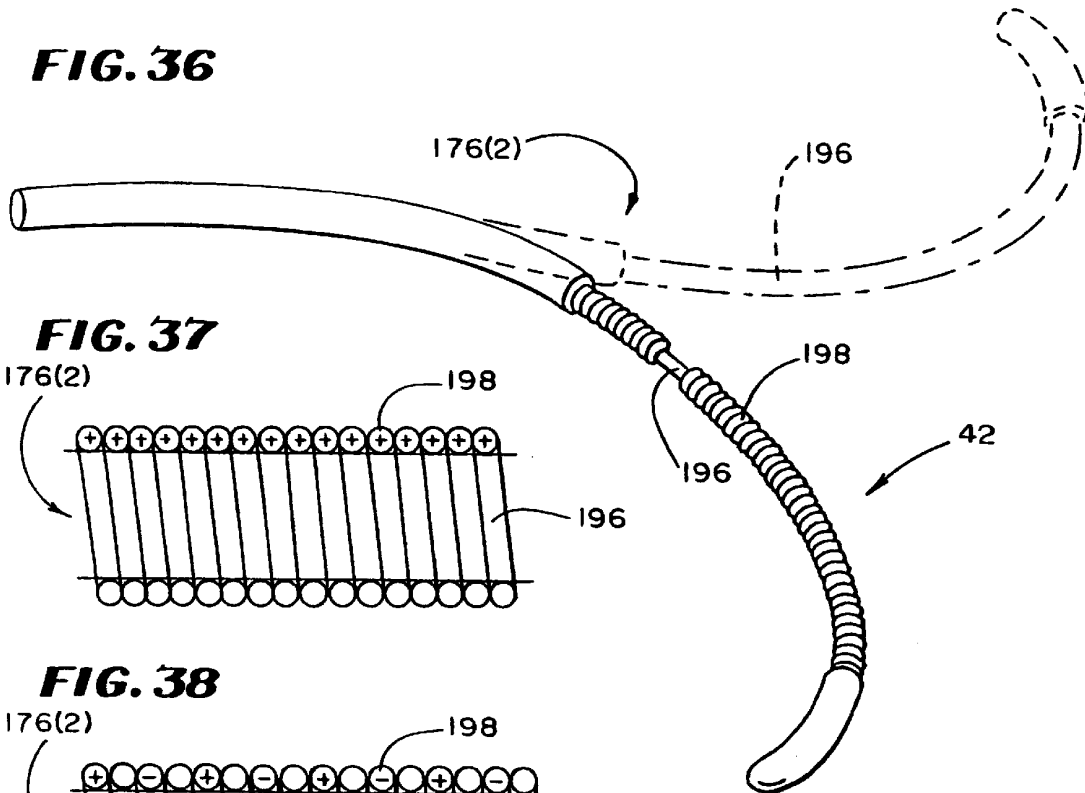


**FIG. 37**

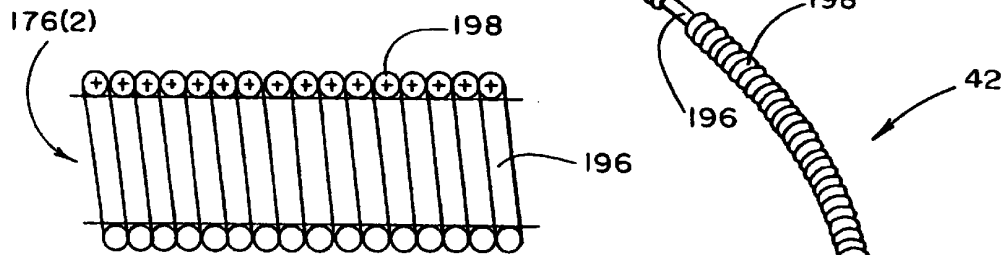


**FIG. 38**

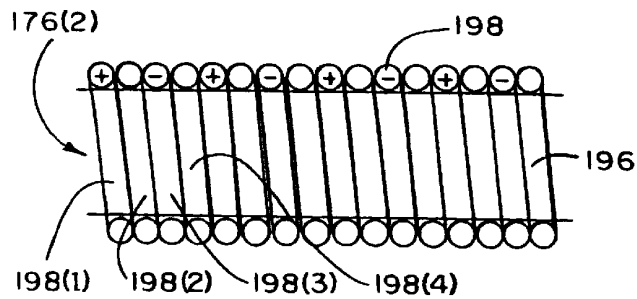


**FIG. 39**

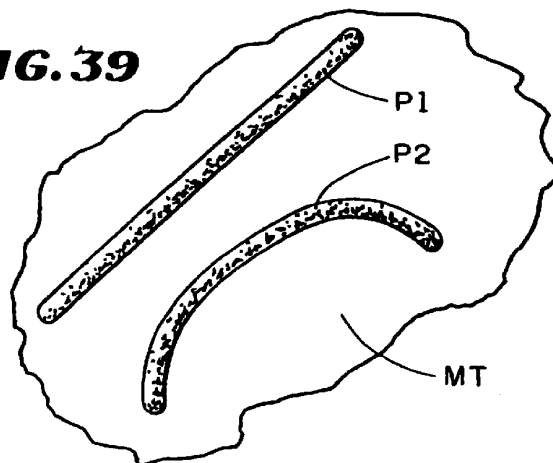


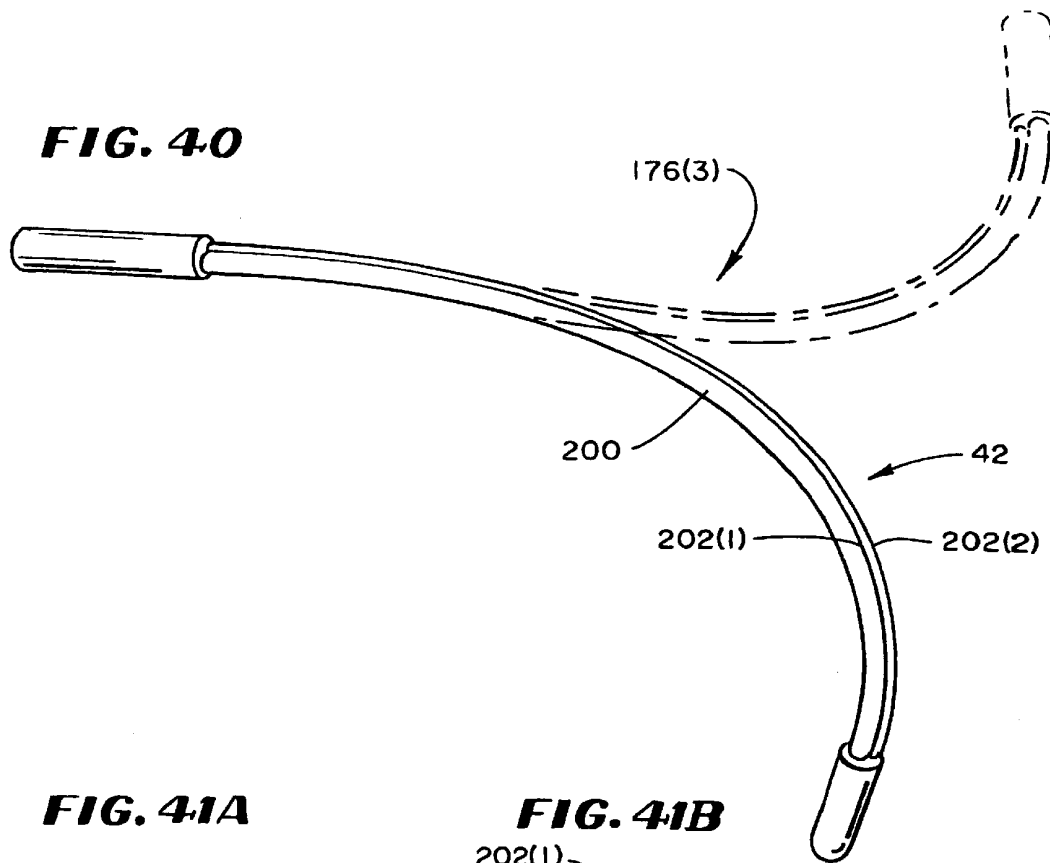


**FIG. 41A**

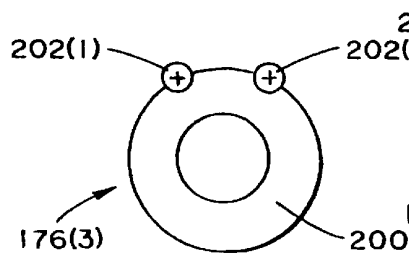


**FIG. 41B**

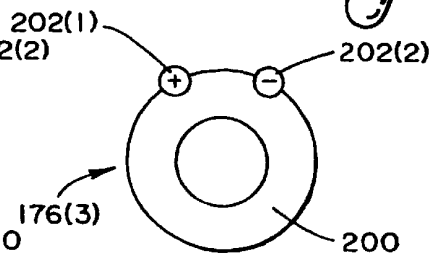


**FIG. 42A**

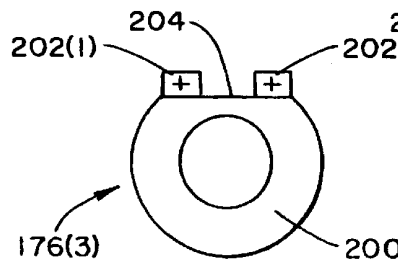


**FIG. 42B**

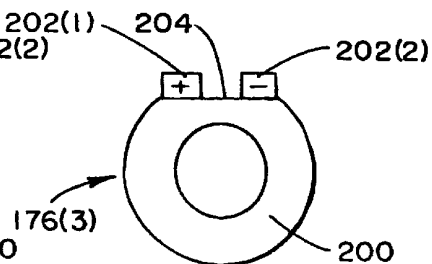


**FIG. 43**

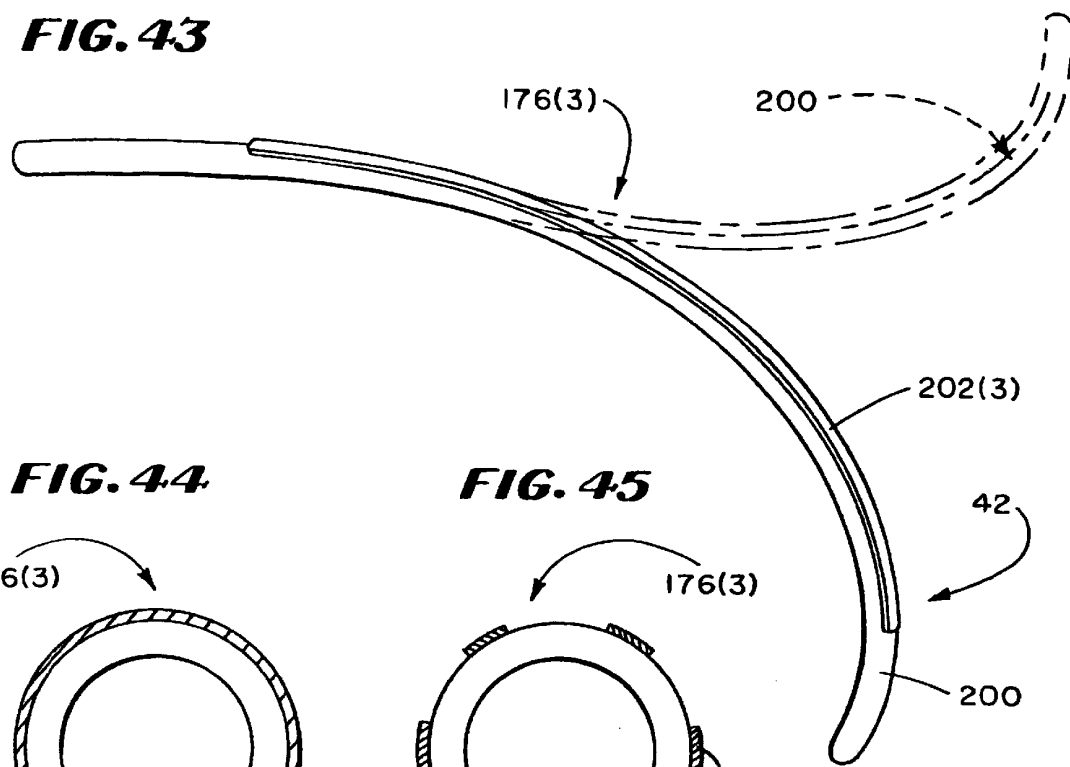


**FIG. 44**

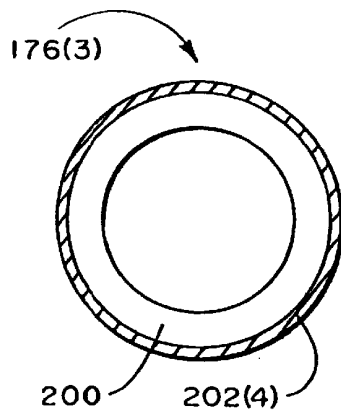


**FIG. 45**

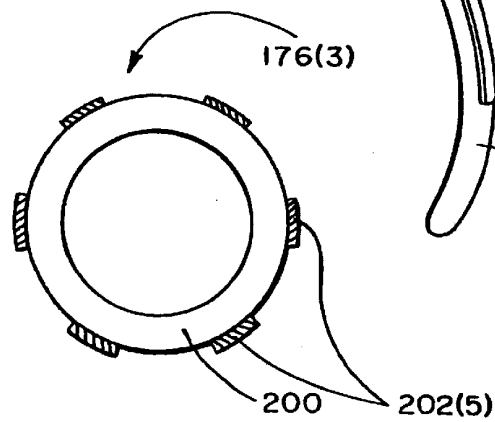


**FIG. 46**

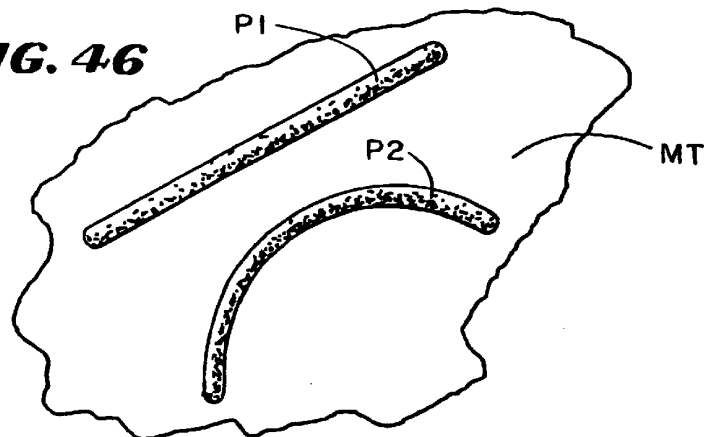


**FIG. 47**

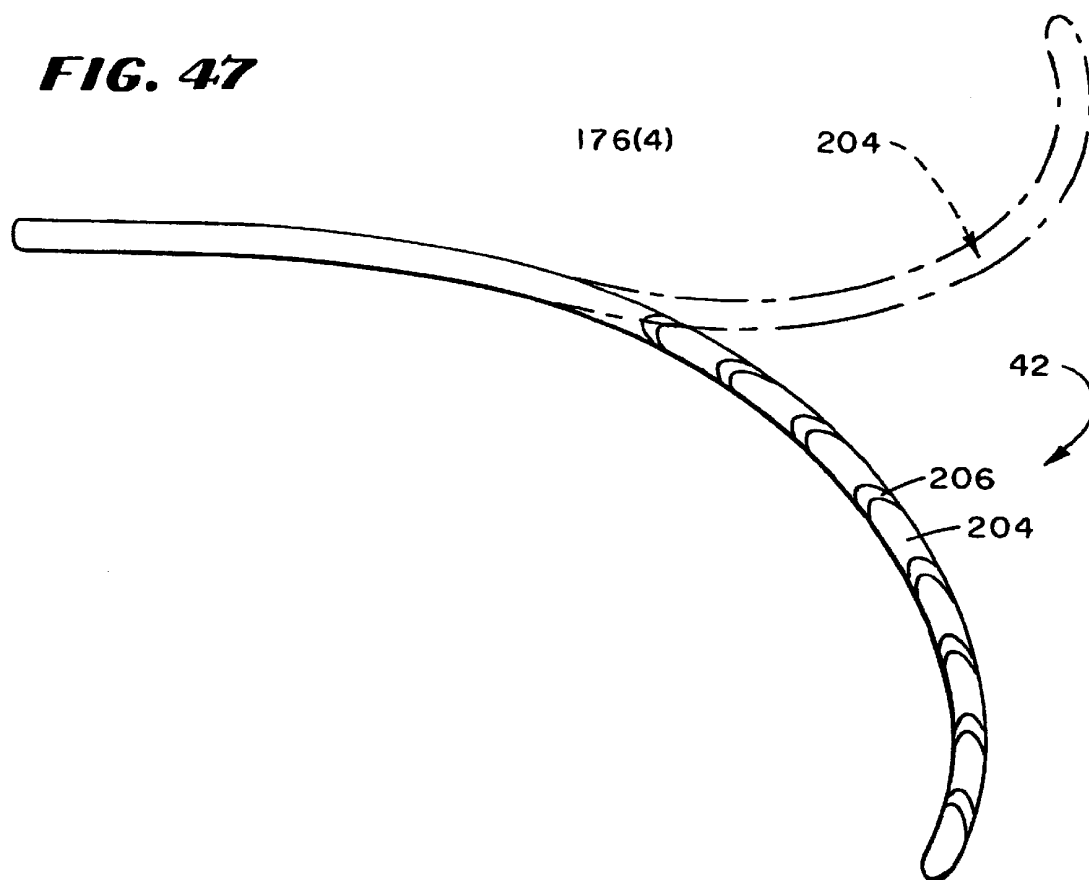


**FIG. 48**

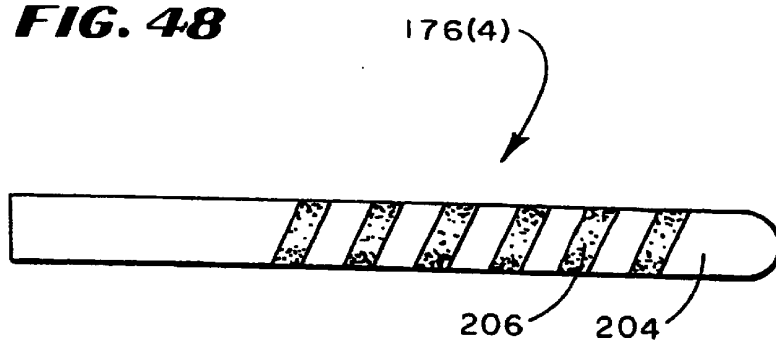



**FIG. 49**

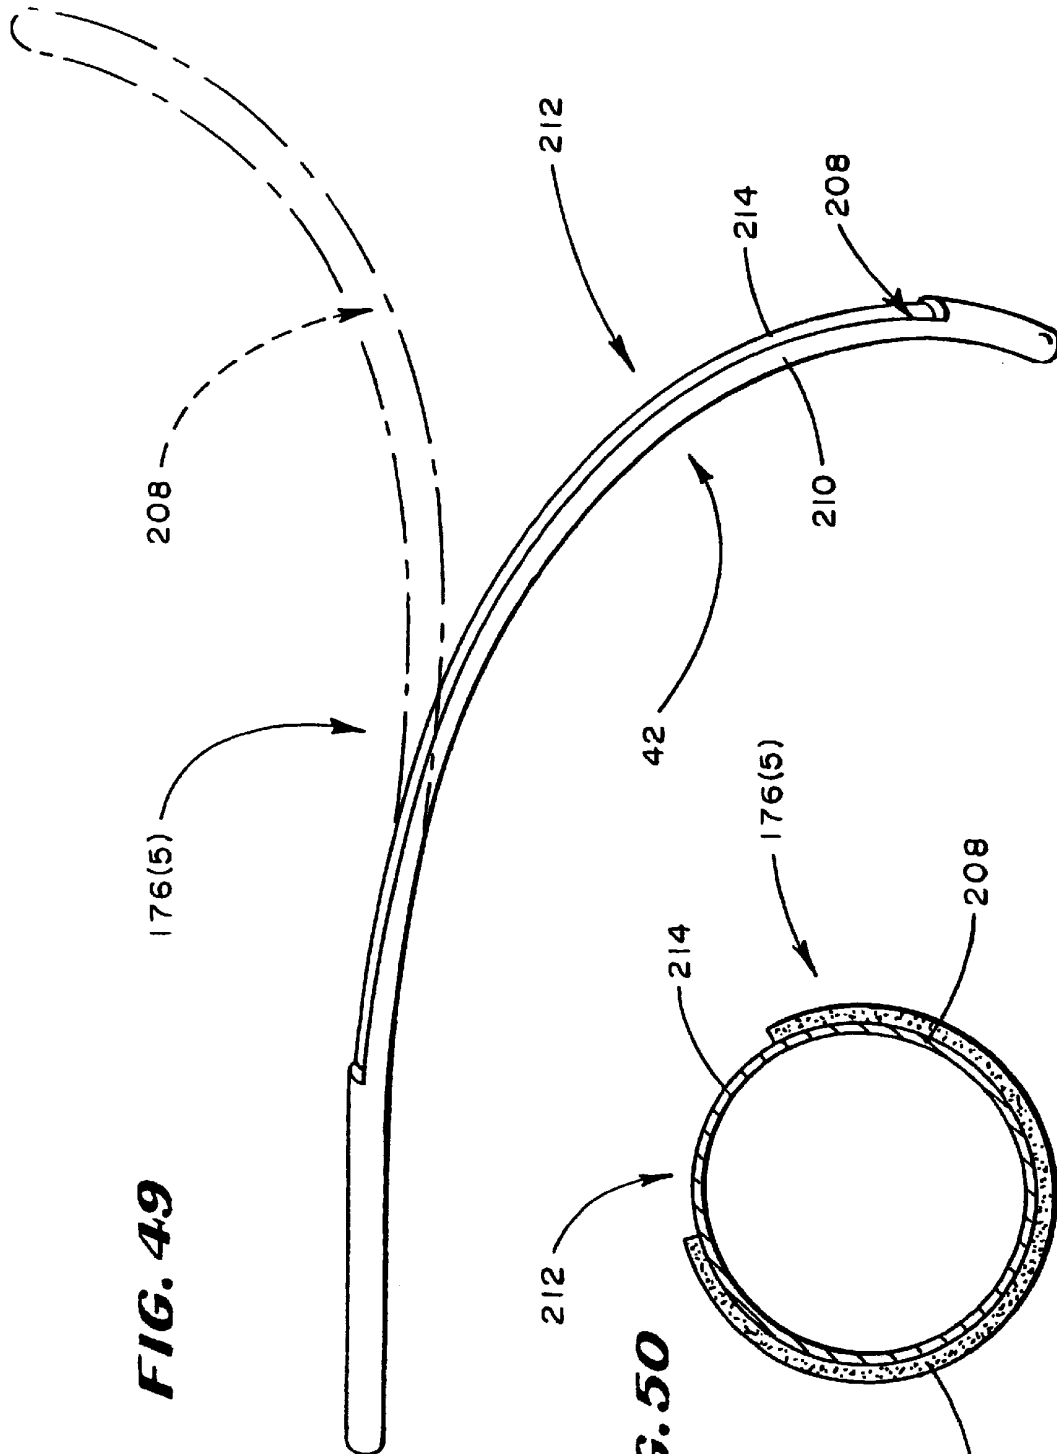

**FIG. 50**

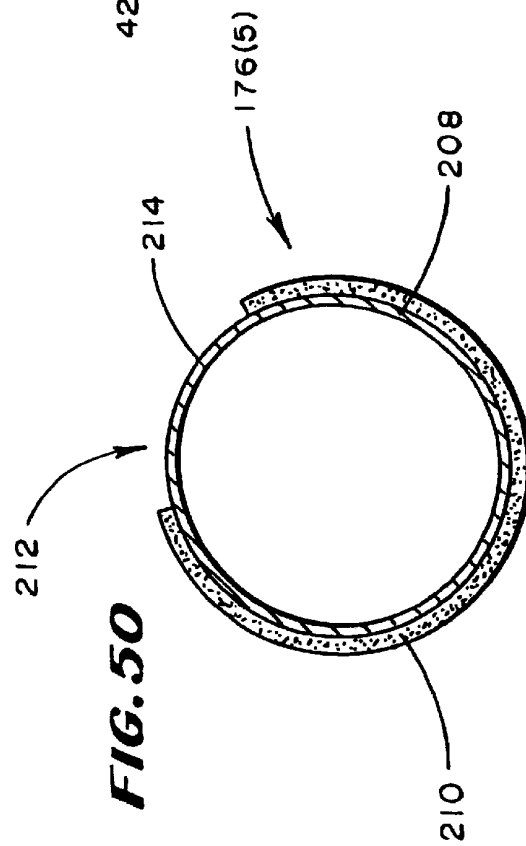



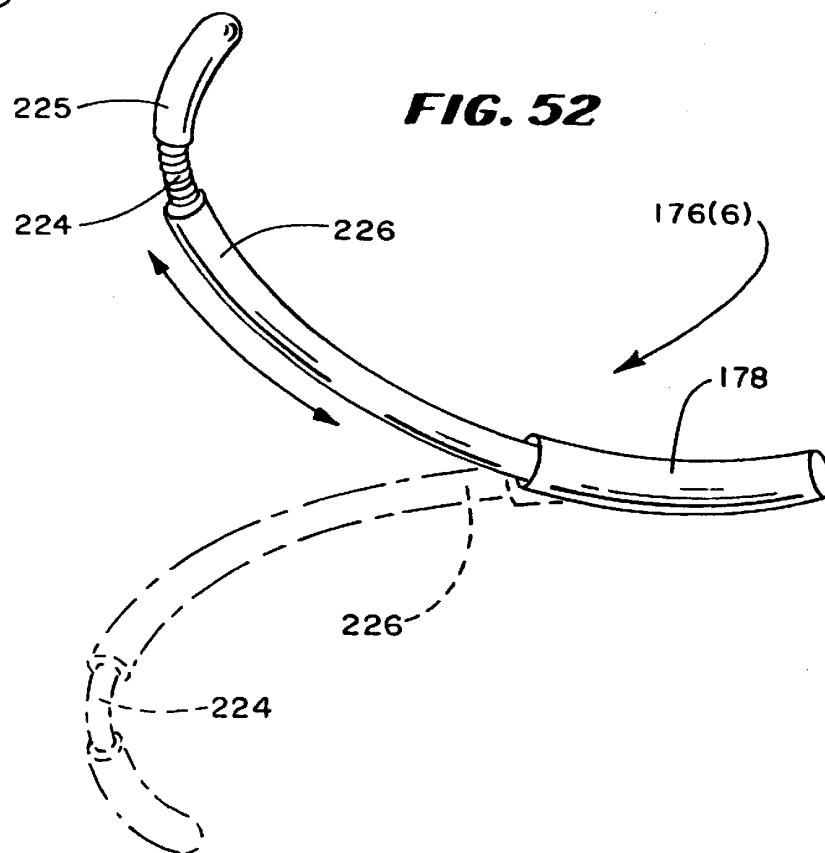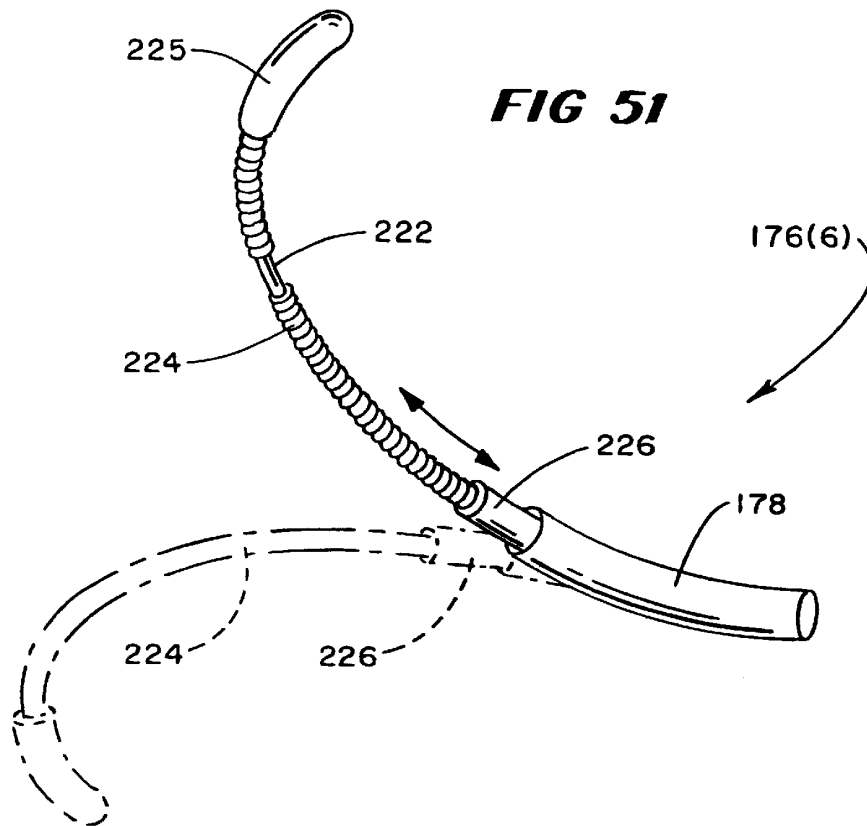


U.S. Patent

Jun. 5, 2001


Sheet 23 of 31

US 6,241,754 B1


**FIG. 53**

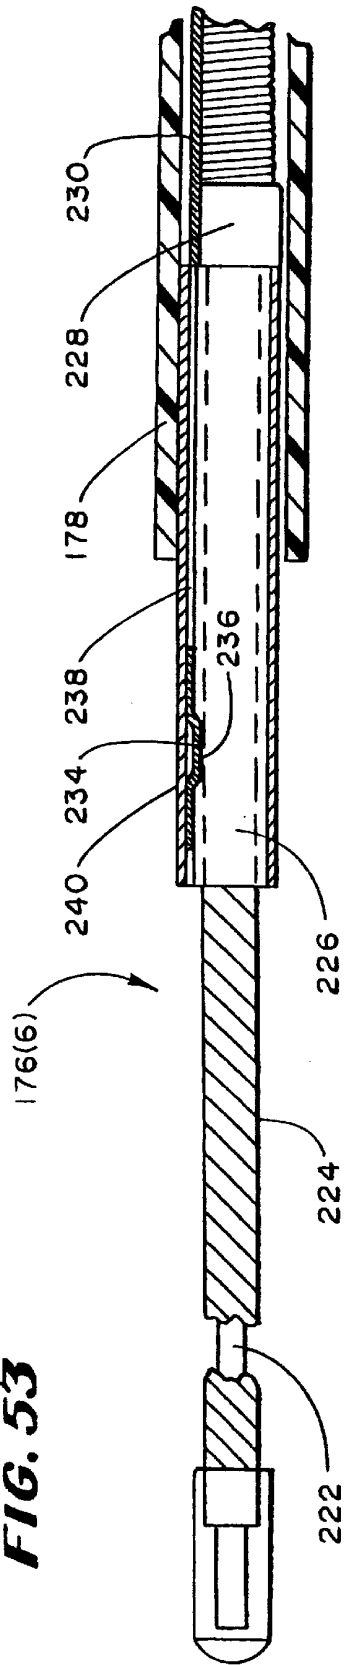


**FIG. 54**

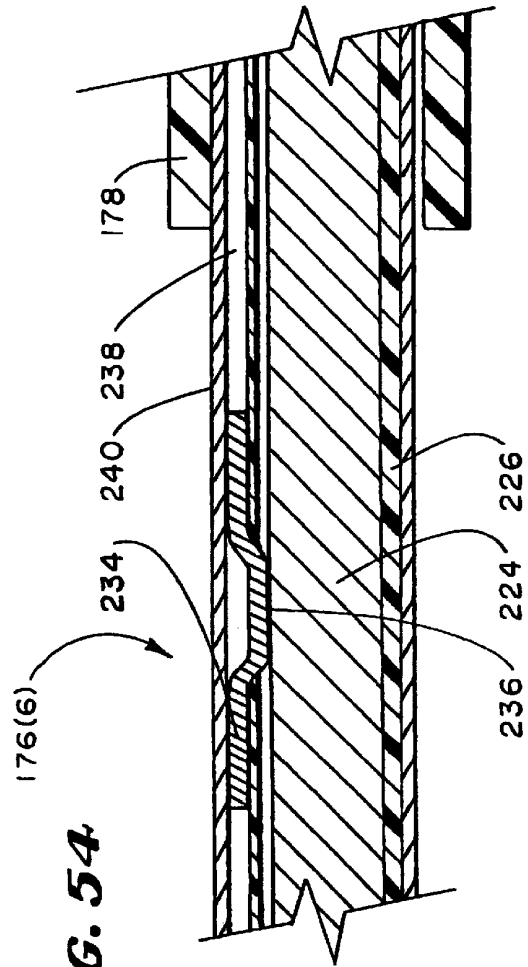


**FIG. 55**

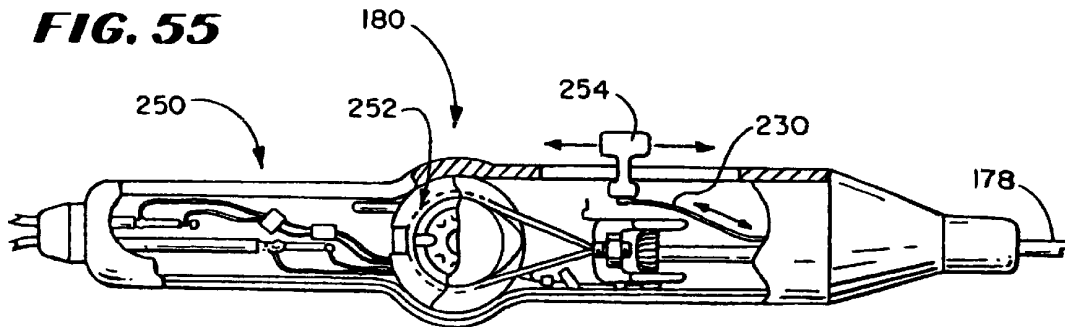


**FIG. 56**

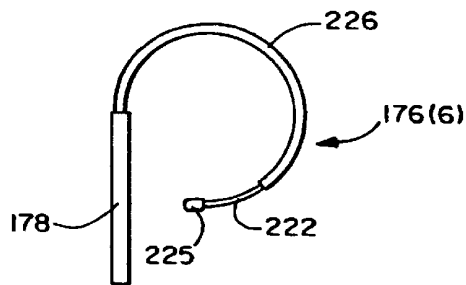




**FIG. 57**

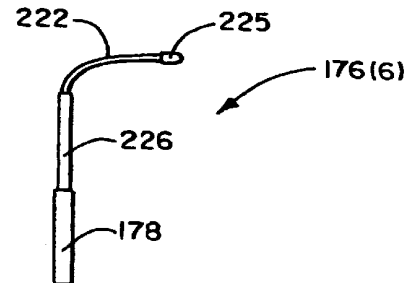



**FIG. 58**

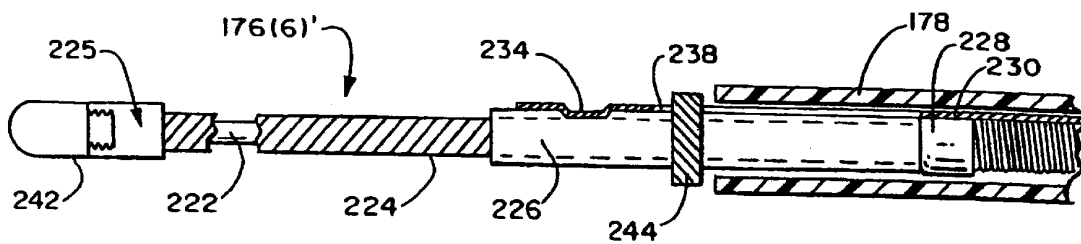

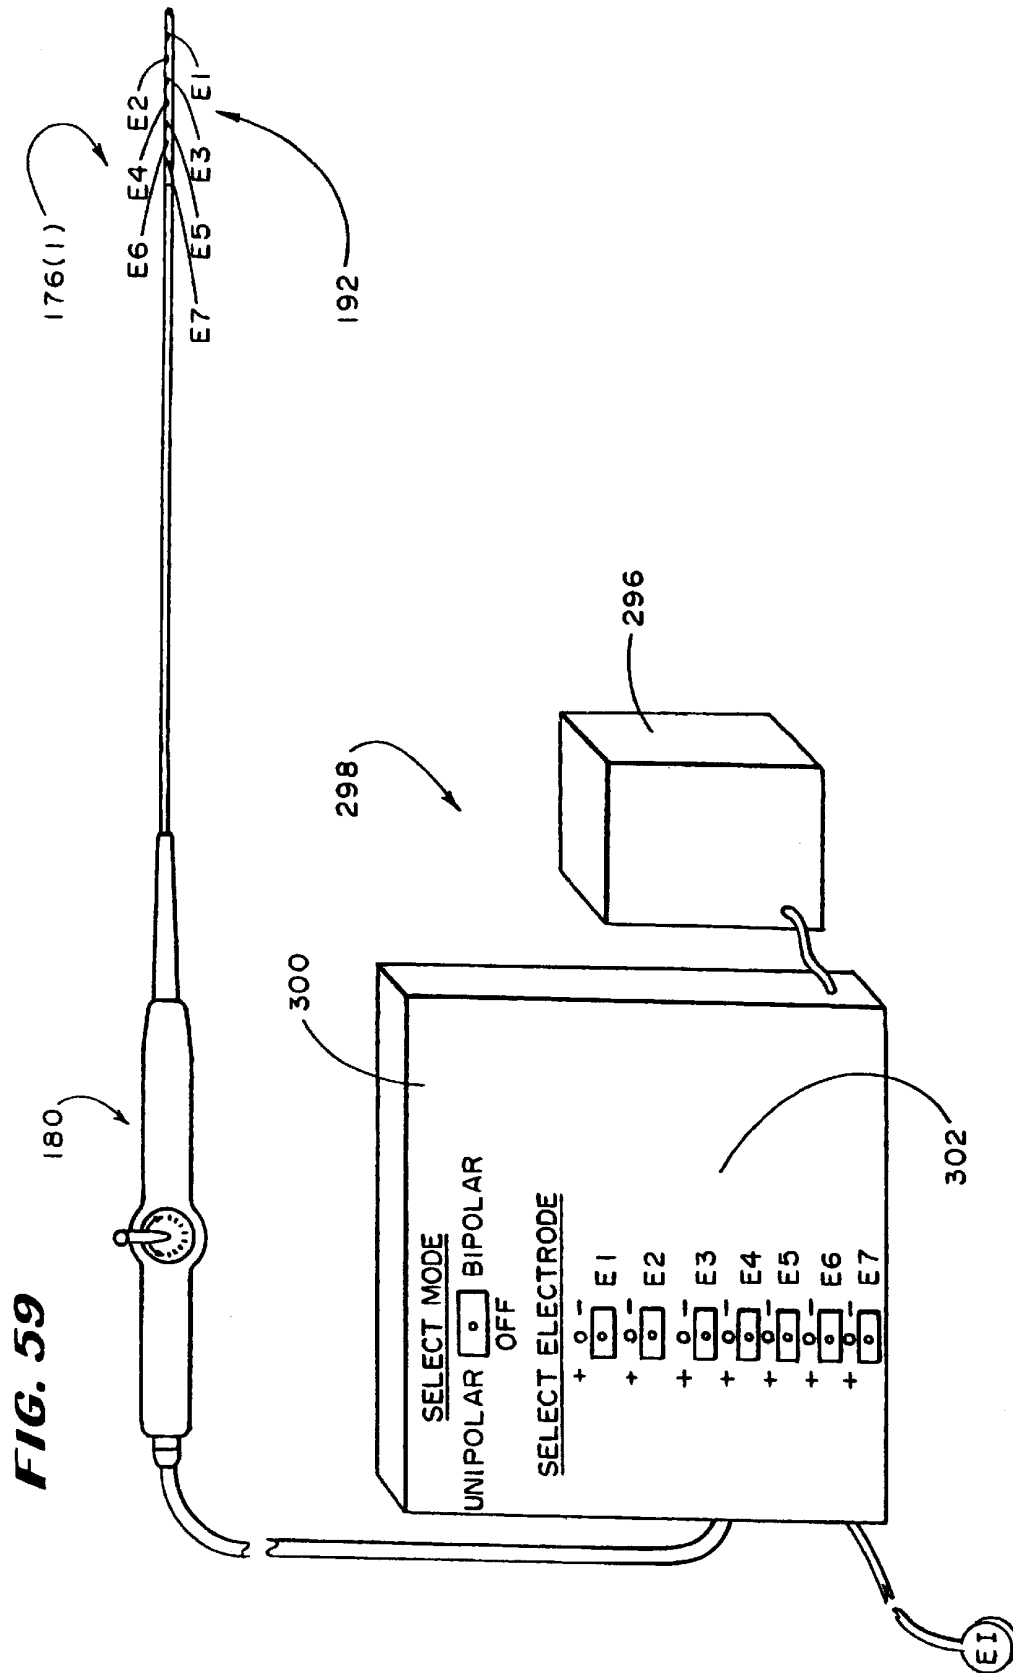

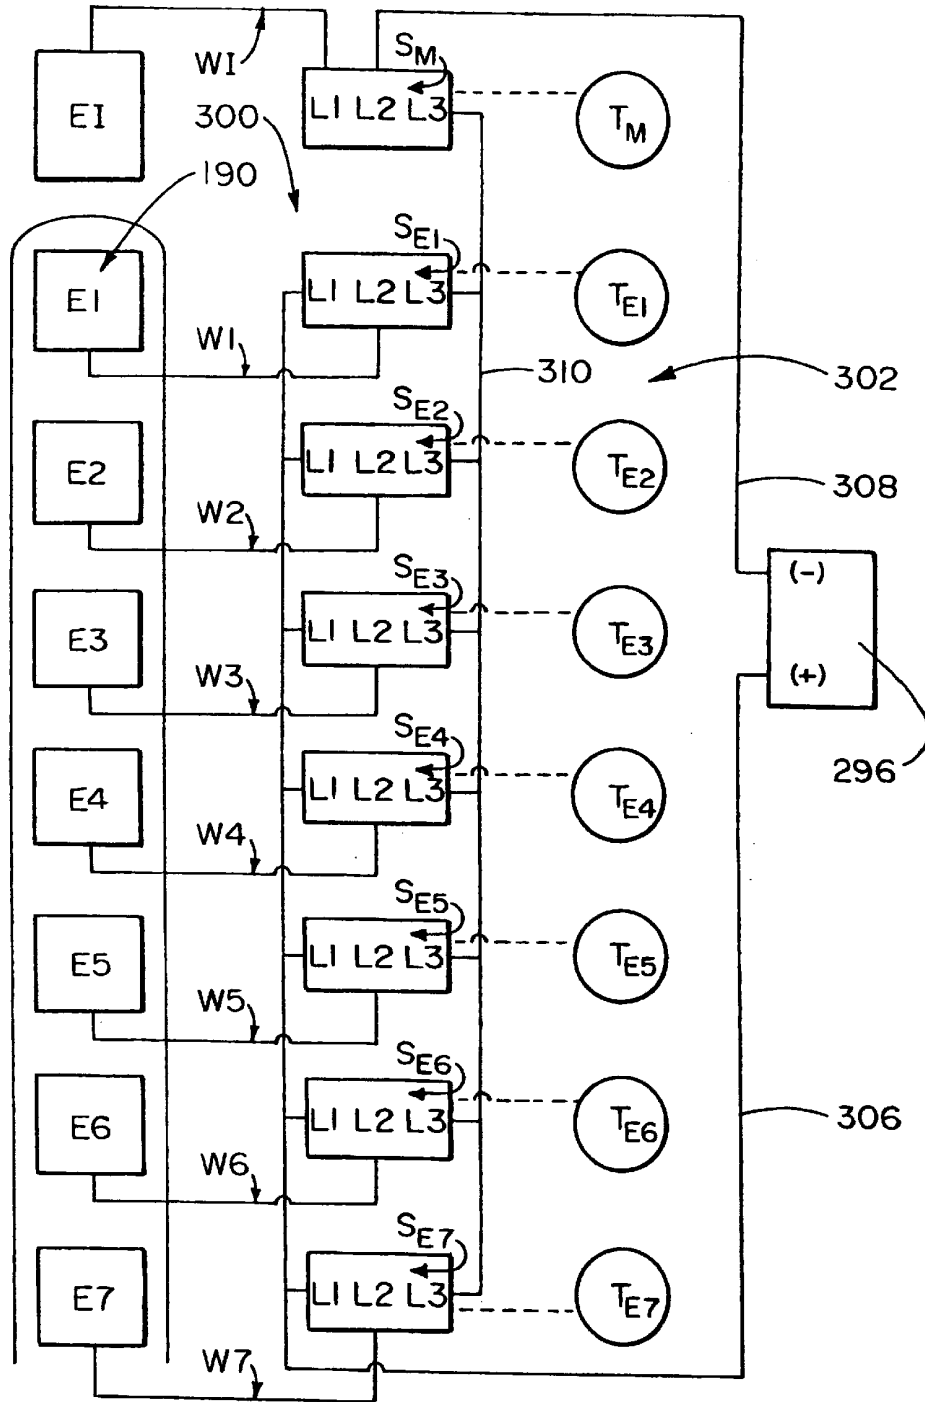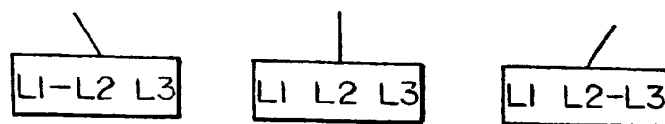
**FIG. 60****FIG. 61**

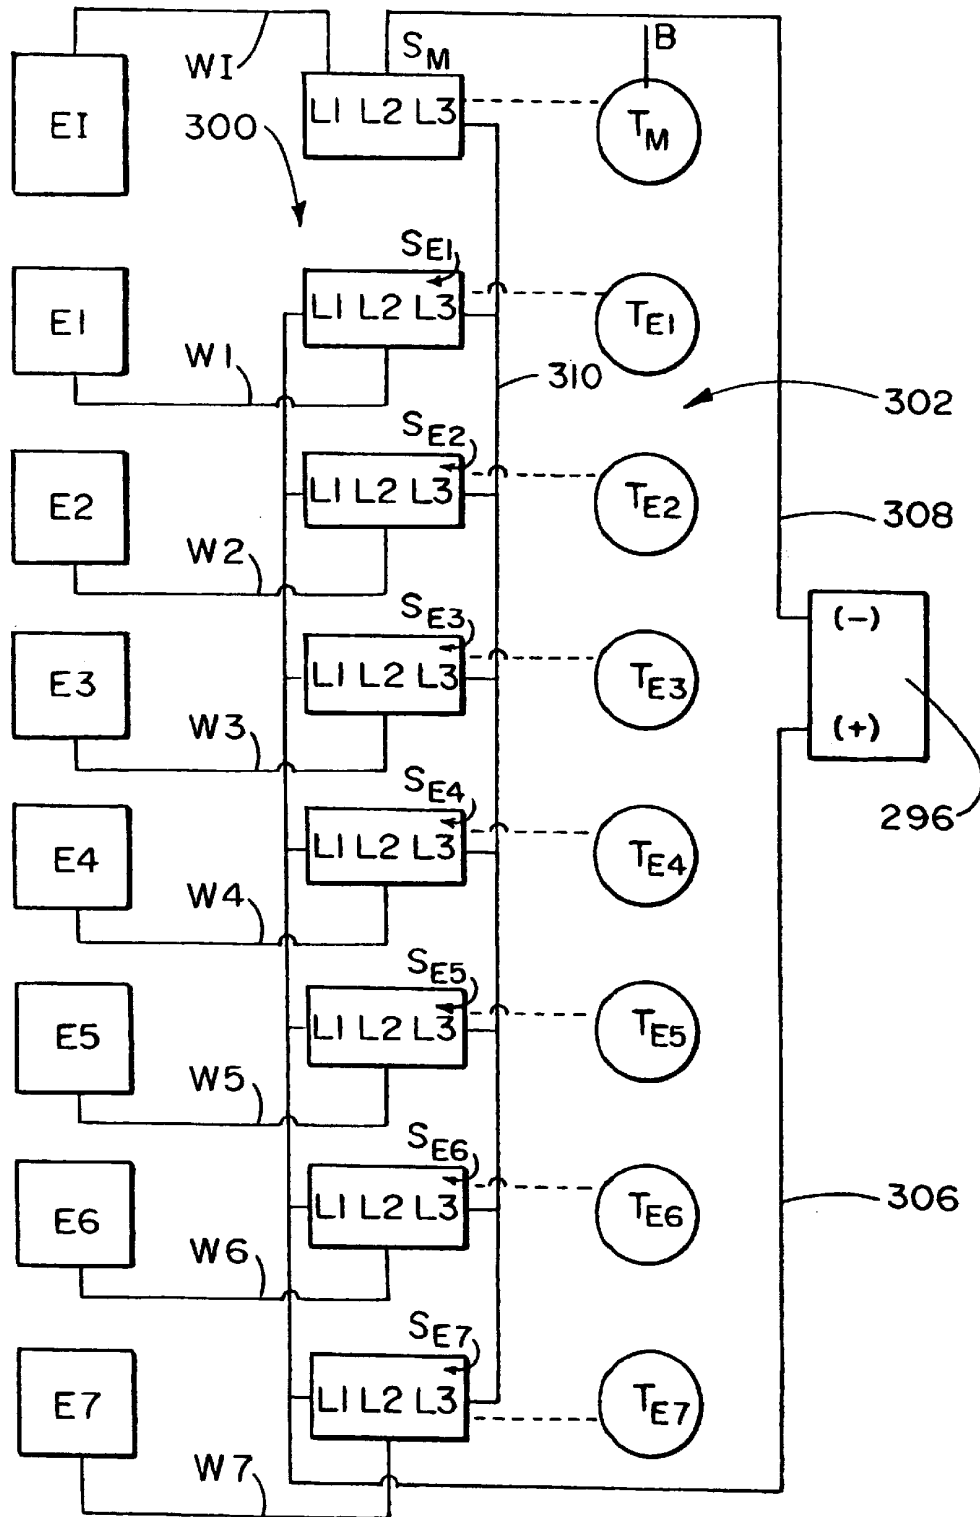
**FIG. 62** (OFF)

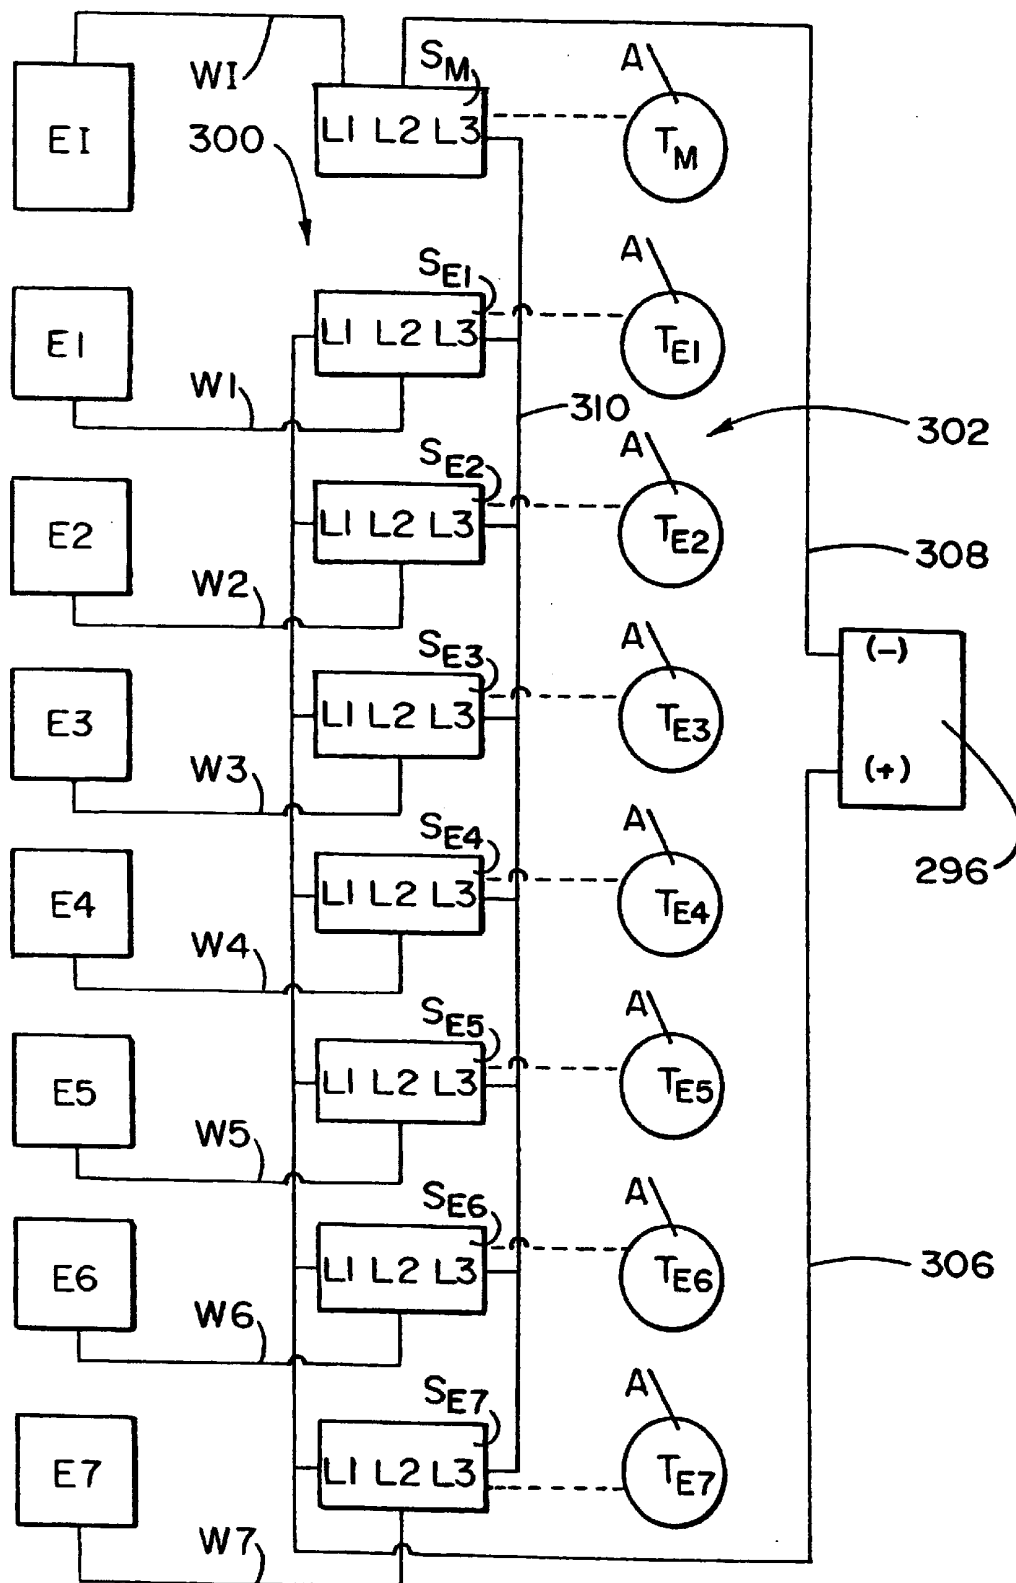**FIG. 63** UNIPOLAR CONTINUOUS



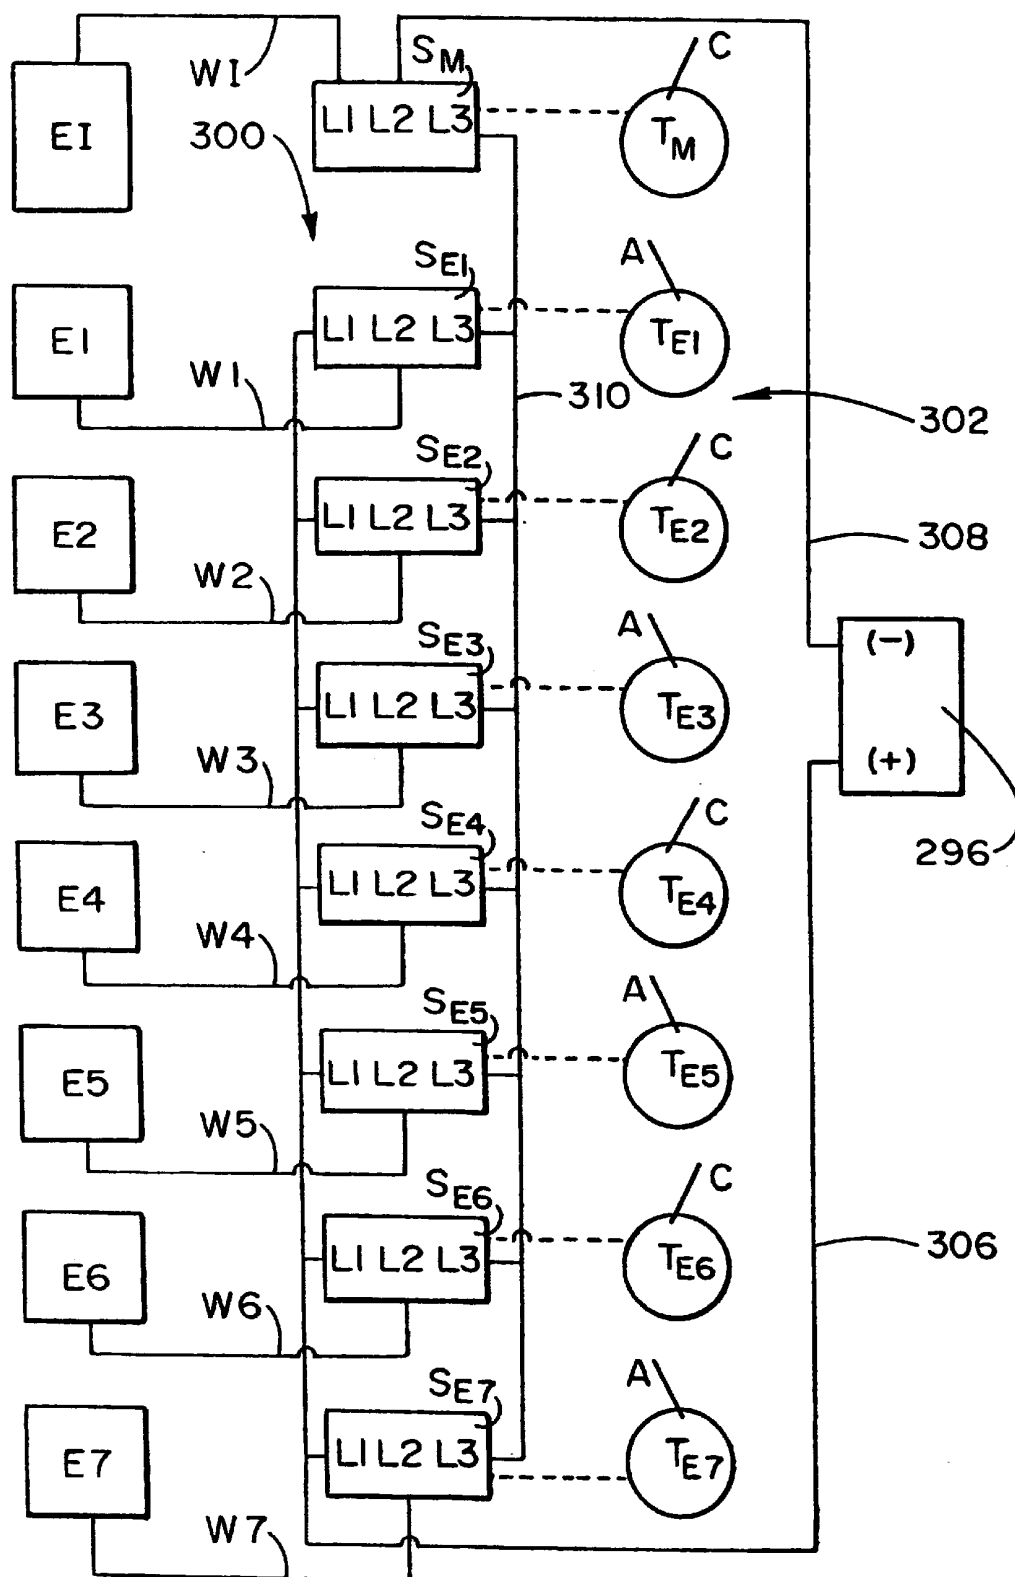

**FIG. 65** BIPOLAR CONTINUOUS

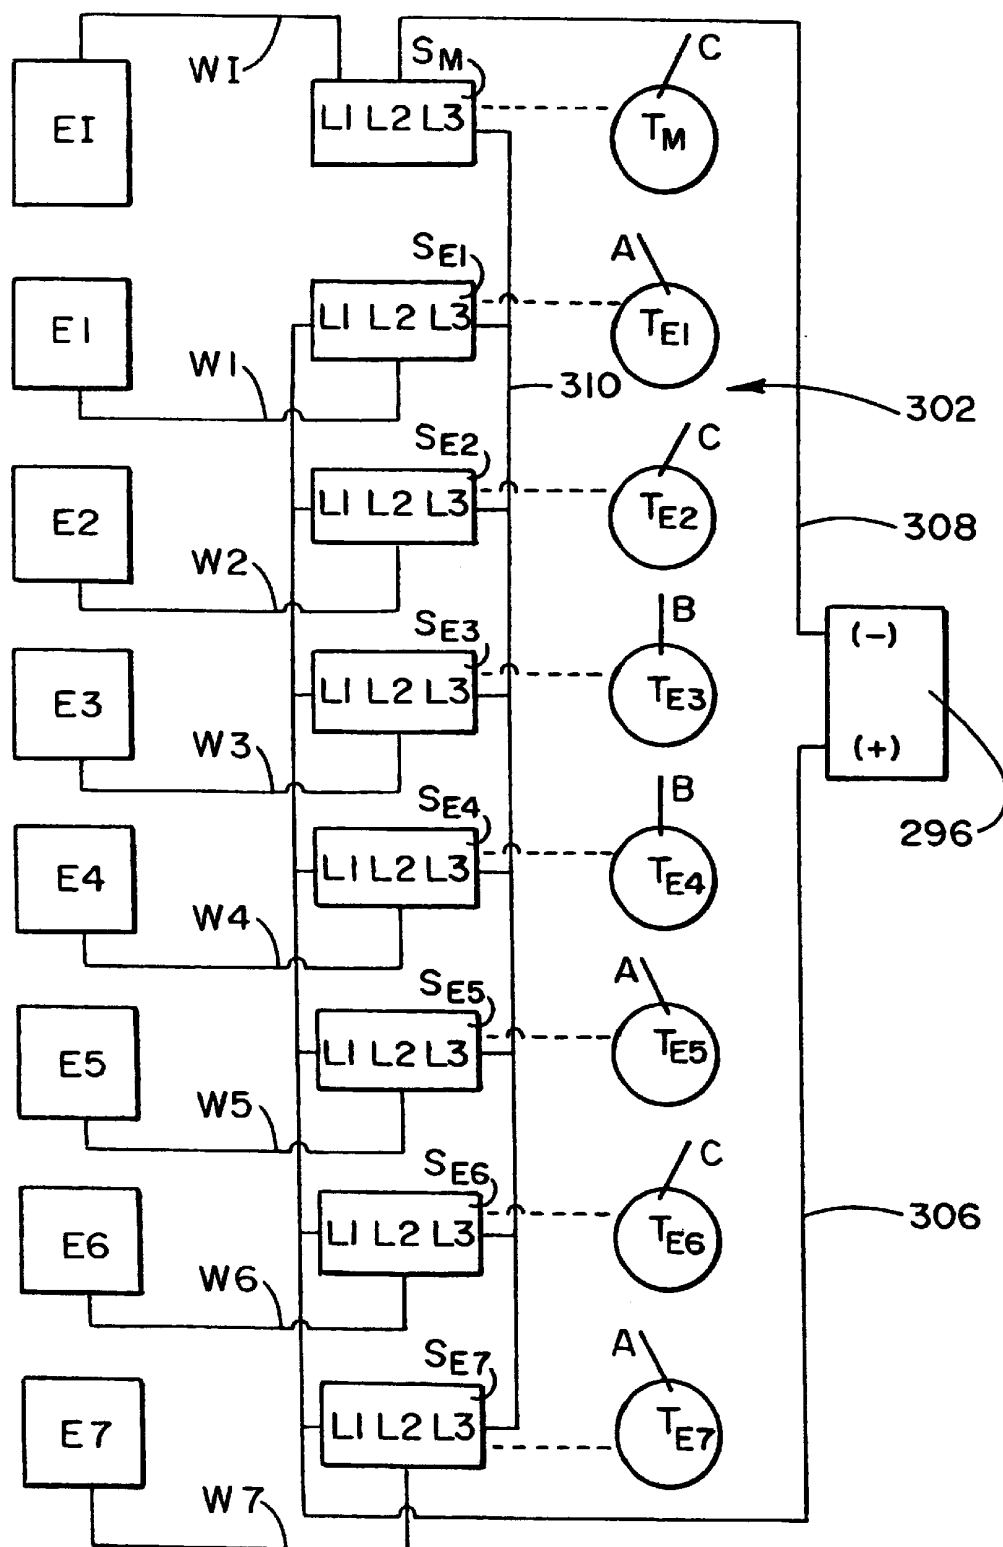

US 6,241,754 B1

1

**COMPOSITE STRUCTURES AND METHODS  
FOR ABLATING TISSUE TO FORM  
COMPLEX LESION PATTERNS IN THE  
TREATMENT OF CARDIAC CONDITIONS  
AND THE LIKE**

This is a divisional of application(s) Ser. No. 08/528,805 filed Sep. 15, 1995 now U.S. Pat. No. 5,575,810; which is a continuation of application Ser. No. 08/137,672 filed Oct. 15, 1993 (abandoned).

**FIELD OF THE INVENTION**

In a general sense, the invention is directed to systems and methods for creating lesions the interior regions of the human body. In a more particular sense, the invention is directed to systems and methods for ablating heart tissue for treating cardiac conditions.

**BACKGROUND OF THE INVENTION**

Normal sinus rhythm of the heart begins with the sinoatrial node (or "SA node") generating an electrical impulse. The impulse usually propagates uniformly across the right and left atria and the atrial septum to the atrioventricular node (or "AV node"). This propagation causes the atria to contract.

The AV node regulates the propagation delay to the atrioventricular bundle (or "HIS" bundle). This coordination of the electrical activity of the heart causes atrial systole during ventricular diastole. This, in turn, improves the mechanical function of the heart.

Atrial geometry, atrial anisotropy, and histopathologic changes in the left or right atria can, alone or together, form anatomical obstacles. The obstacles can disrupt the normally uniform propagation of electrical impulses in the atria. These anatomical obstacles (called "conduction blocks") can cause the electrical impulse to degenerate into several circular wavelets that circulate about the obstacles. These wavelets, called "reentry circuits," disrupt the normally uniform activation of the left and right atria. Abnormal, irregular heart rhythm, called arrhythmia, results. This form of arrhythmia is called atrial fibrillation, which is a very prevalent form of arrhythmia.

Today, as many as 3 million Americans experience atrial fibrillation. These people experience an unpleasant, irregular heart beat. Because of a loss of atrioventricular synchrony, these people also suffer the consequences of impaired hemodynamics and loss of cardiac efficiency. They are more at risk of stroke and other thromboembolic complications because of loss of effective contraction and atrial stasis.

Treatment is available for atrial fibrillation. Still, the treatment is far from perfect.

For example, certain antiarrhythmic drugs, like quinidine and procainamide, can reduce both the incidence and the duration of atrial fibrillation episodes. Yet, these drugs often fail to maintain sinus rhythm in the patient.

Cardioactive drugs, like digitalis, Beta blockers, and calcium channel blockers, can also be given to control the ventricular response. However, many people are intolerant to such drugs.

Anticoagulant therapy also combat thromboembolic complications.

Still, these pharmacologic remedies often do not remedy the subjective symptoms associated with an irregular heart-beat. They also do not restore cardiac hemodynamics to normal and remove the risk of thromboembolism.

2

Many believe that the only way to really treat all three detrimental results of atrial fibrillation is to actively interrupt all the potential pathways for atrial reentry circuits.

James L. Cox, M.D. and his colleagues at Washington University (St. Louis, Mo.) have pioneered an open heart surgical procedure for treating atrial fibrillation, called the "maze procedure." The procedure makes a prescribed pattern of incisions to anatomically create a convoluted path, or maze, for electrical propagation within the left and right atria, therefore its name. The incisions direct the electrical impulse from the SA node along a specified route through all regions of both atria, causing uniform contraction required for normal atrial transport function. The incisions finally direct the impulse to the AV node to activate the ventricles, restoring normal atrioventricular synchrony. The incisions are also carefully placed to interrupt the conduction routes of the most common reentry circuits.

The maze procedure has been found very effective in curing atrial fibrillation. Yet, despite its considerable clinical success, the maze procedure is technically difficult to do. It requires open heart surgery and is very expensive. Because of these factors, only a few maze procedures are done each year.

One objective of the invention is to provide catheter-based ablation systems and methods providing beneficial therapeutic results without requiring invasive surgical procedures.

Another objective of the invention is to provide systems and methods that simplify the creation of complex lesions patterns in body tissue, such as in the heart.

**SUMMARY OF THE INVENTION**

The invention provides new methods and structures for creating specially shaped lesions in heart tissue.

One aspect of the invention provides a method of ablating tissue in the heart to treat atrial fibrillation by introducing into a selected atrium an elongated energy emitting element that can be flexed along its length from a generally straight shape into a variety of curvilinear shapes. The method exposes the element to a region of the atrial wall while flexing the element into a desired shape. The method applies ablating energy to the element to thermally destroy tissue, forming an elongated lesion having a contour that follows the flexure of the element. The method repeats the tissue exposure, element flexing and energy application steps at different spaced regions along the atrial wall. In this way, the method forms a convoluted lesion pattern comprising elongated straight lesions and elongated curvilinear lesions. The pattern directs electrical impulses within the atrial myocardium along a path that activates the atrial myocardium while interrupting reentry circuits that, if not interrupted, would cause fibrillation.

In a preferred embodiment, the method introduces the element through a vascular approach, without opening the heart. In this embodiment, the method applies radiofrequency electromagnetic energy to ablate the tissue.

Another aspect of the invention provides a method of ablating tissue in the heart to treat atrial fibrillation that introduces into a selected atrium an energy emitting element comprising a three-dimensional array of longitudinal main splines. The main splines extend in a circumferentially spaced relationship to form a basket.

According to this aspect of the invention, one or more transverse bridge splines periodically span adjacent main splines. At least some of the main splines have elongated

US 6,241,754 B1

3

regions of energy emitting material longitudinally spaced among regions of non-energy emitting material. At least one of the bridge splines also has a region of energy emitting material that intersects a region of energy emitting material on a main spline.

According to this aspect of the invention, the method exposes the element to the atrial wall. The method applies ablating energy simultaneously to at least some of the energy emitting regions of the element to thermally destroy tissue. The applied ablating energy forms a convoluted lesion pattern comprising elongated straight and elongated curvilinear lesions. The pattern directs electrical impulses within the atrial myocardium along a path that activates the atrial myocardium while interrupting reentry circuits that, if not interrupted, would cause fibrillation.

In one embodiment, the method introduces into the selected atrium a second elongated energy emitting element that can be flexed along its length from a generally straight shape into a variety of curvilinear shapes. The method exposes the second element to a region of the atrial wall at selected parts of the convoluted lesion pattern, while flexing the element into a desired shape. The method applies ablating energy to the second element to thermally destroy tissue to form an elongated lesion having a contour that follows the flexure of the element. This contoured lesion becomes a part of the convoluted lesion pattern.

In a preferred embodiment, the method introduces the three-dimensional element in a collapsed condition through a vascular approach, without opening the heart. The method returns the element to its three-dimensional shape before exposing it to the atrial wall. In this arrangement, the method applies radiofrequency electromagnetic energy to ablate the tissue.

Another aspect of the invention provides a method of assembling a composite structure for ablating tissue within the body. The method creates a template that displays in planar view a desired lesion pattern for the tissue. The lesion pattern includes a region of elongated lesions, each having a length that is substantially greater than its width. The pattern also includes a region that is free of lesions.

The method lays on the template an array of spaced apart elongated elements that overlie each region. The method creates energy emitting zones on the elements where the template displays the elongated lesion region. The method creates non-energy emitting zones on each element where the template displays the lesion-free region.

By joining the elements, the method forms the composite structure.

According to another aspect of the invention, the template displays a lesion pattern comprising at least two longitudinal lesion regions, at least one transverse lesion region intersecting one of the longitudinal lesion regions, and a region that is free of lesions. The method that follows this aspect of the invention lays on the template an array of spaced apart longitudinal elements, with at least one longitudinal element overlying each region where the template displays a longitudinal lesion. The method also lays on the template a transverse element that intersects one of the longitudinal elements and overlies the region where the template displays a transverse lesion.

Guided by the template, this aspect of the invention creates energy emitting and non-energy emitting zones on each longitudinal and transverse element. The method joins the longitudinal and transverse elements to form the composite structure.

In a preferred embodiment, when joined, the elements form a three-dimensional basket shape.

4

Yet another aspect of the invention provides catheter-based systems and methods that create lesions in myocardial tissue. In purpose and effect, the system and method emulate an open heart maze procedure, but do not require costly and expensive open heart surgery.

According to this aspect of the invention, the method creates a template that displays in planar view a lesion pattern for the myocardium of a selected atrium. The lesion pattern defines a path that directs electrical impulses to activate the myocardium while interrupting reentry circuits that, if not interrupted, would cause atrial fibrillation.

The method lays on the template an array of spaced apart elements. Guided by the template, the method creates energy emitting and non-energy emitting zones on the elements. The method joins the elements to form the composite structure.

The method introduces the composite structure into the selected atrium. Upon exposing the composite structure to the atrial myocardium, the method applies ablating energy to the energy emitting zones to form the desired lesion pattern in the atrial myocardium.

In a preferred embodiment, the composite structure has a three-dimensional basket shape.

The invention permits the use of a catheter-based techniques that emulate an open heart maze procedure by tissue ablation, thereby avoiding costly and intrusive open heart surgery. The systems and methods can be used to perform other curative procedures in the heart as well.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a simplified and somewhat diagrammatic perspective view of the human heart;

FIG. 2 is a diagrammatic plan view of the atrial region of the heart, showing a circuitous path for an electrical impulse to follow between the SA node and the AV node;

FIG. 3 is a grid for creating a three-dimensional structure for making curvilinear lesions within the atria of the heart;

FIGS. 4A/4B are splines having electrically conductive and electrically non-conductive regions that, when assembled, emit ablating energy to form curvilinear lesions within the atria of the heart;

FIGS. 5A/5B are the three-dimensional structures formed when the splines shown in FIGS. 4A/4B are assembled, with the structure shown in FIG. 5A being intended for use within the right atrium and the structure shown in FIG. 5B being intended for use within the left atrium;

FIG. 6 is a perspective, largely diagrammatic view showing the electrical connections that transmit ablating energy to a three-dimensional structure for forming curvilinear lesions within the atria of the heart;

FIG. 7 is a perspective view of an alternate three-dimensional structure that can be used to emit ablating energy to form curvilinear lesions within the atria of the heart and that includes, as an integral part, a steerable distal element carried within the open interior area of the structure;

FIG. 8 is a perspective view of an alternate three-dimensional structure that can be used to emit ablating energy to form curvilinear lesions within the atria of the heart and that includes, as an integral part, an internal electrode structure that comprises a single length of wire material preshaped to assume a helical array;

FIG. 9 is a perspective view of an alternate three-dimensional structure that can be used to emit ablating energy to form curvilinear lesions within the atria of the

US 6,241,754 B1

5

heart and that includes, as an integral part, an external electrode structure that comprises a single length of wire material preshaped to assume a helical array;

FIG. 10 is a perspective view of an alternate three-dimensional structure that can be used to emit ablating energy to form curvilinear lesions within the atria of the heart and that encloses, as an integral part, an internal basket structure;

FIG. 11 is a plan view of an ablating probe that carries the three-dimensional basket structure shown in FIG. 7;

FIGS. 12A and 12B are plan views of another ablating probe that carries a three-dimensional basket structure that, in use, forms curvilinear lesions within the atria of the heart;

FIG. 13 is a plan view of an alternate ablating element that can be used to emit ablating energy to form curvilinear lesions within the atria of the heart;

FIG. 14 is a plan view of an inflatable ablating element that can be used to emit ablating energy to form curvilinear lesions within the atria of the heart;

FIGS. 15 to 26 are views of a delivery system that, when used in the manner shown in these Figures, introduces and deploys ablating elements shown in the preceding Figures into the atria of the heart;

FIG. 27 is a plan view of a probe that carries a family of flexible, elongated ablating elements that can be used to emit ablating energy to form curvilinear lesions within the atria of the heart;

FIGS. 28 to 30 are views of one flexible, elongated ablating element that carries a pattern of closely spaced electrically conductive regions that can be used to emit ablating energy to form curvilinear lesions within the atria of the heart;

FIG. 31 shows, in somewhat diagrammatic form, a generally straight adjoining lesion pattern that can be formed by the element shown in FIGS. 28 to 30;

FIG. 32 shows, in somewhat diagrammatic form, a curvilinear adjoining lesion pattern that can be formed by the element shown in FIGS. 28 to 30;

FIG. 33 show the flexible, elongated ablating element shown in FIG. 28 that includes an alternating pattern of conductive regions and non-conductive regions that can form an interrupted pattern of lesions in myocardial tissue;

FIG. 34 shows, in somewhat diagrammatic form, an interrupted lesion pattern that can be formed by the element shown in FIG. 33;

FIG. 35 shows, in somewhat diagrammatic form, an interrupted curvilinear lesion pattern that can be formed by the element shown in FIG. 33;

FIGS. 36 to 38 show another embodiment of a flexible, elongated ablating element that comprises a closely wound, single layer spiral winding;

FIG. 39 shows, in somewhat diagrammatic form, adjoining lesion patterns, straight and curvilinear, which the element shown in FIGS. 36 to 38 can form;

FIGS. 40 to 45 show a flexible, elongated ablating element that carries elongated strips of conductive material that can form curvilinear patterns of lesions in myocardial tissue;

FIG. 46 shows, in somewhat diagrammatic form, adjoining lesion patterns, straight and curvilinear, which the element shown in FIGS. 40 to 45 can form;

FIGS. 47 and 48 show a flexible elongated ablating element that carries a thin, flat ribbon of spirally wound conductive material that can form curvilinear patterns of lesions in myocardial tissue;

6

FIGS. 49 and 50 show a flexible, elongated ablating element that includes an elongated opening that exposes a conductive region that can form curvilinear patterns of lesions in myocardial tissue;

FIGS. 51 to 54 show a flexible, elongated ablating element that carries a wound spiral winding with a sliding sheath that can form curvilinear patterns of lesions in myocardial tissue;

FIG. 55 shows a handle for the ablating element shown in FIGS. 51 to 54;

FIG. 56 shows a flexible, elongated ablation element, generally like that shown in FIGS. 51 to 54, with a sheath made of a non rigid material that is less flexible than the underlying element;

FIG. 57 shows a flexible, elongated ablation element, generally like that shown in FIGS. 51 to 54, with a sheath made of a relatively rigid material;

FIG. 58 shows a flexible, elongated alternation element, like that shown in FIGS. 51 to 54, except that it can be operated in a bipolar ablation mode to form curvilinear patterns of lesions in myocardial tissue;

FIG. 59 is a partially diagrammatic view of a system for supplying ablating energy to the element shown in FIG. 28, which includes a controller that electronically adjusts and alters the energy emitting characteristics of the element;

FIG. 60 is a schematic view of the controller and associated input panel shown in FIG. 59;

FIG. 61 is a schematic view of the toggle carried on the input panel shown in FIG. 60 in its three operative positions;

FIG. 62 is a schematic view of the controller shown in FIG. 60 electronically configured in its OFF mode;

FIG. 63 is a schematic view of the controller shown in FIG. 60 electronically configured to provide a continuous, unipolar lesion pattern;

FIG. 64 is a schematic view of the controller shown in FIG. 60 electronically configured to provide an interrupted, unipolar lesion pattern;

FIG. 65 is a schematic view of the controller shown in FIG. 60 electronically configured to provide a continuous, bipolar lesion pattern; and

FIG. 66 is a schematic view of the controller shown in FIG. 60 electronically configured to provide an interrupted, bipolar lesion pattern.

The invention may be embodied in several forms without departing from its spirit or essential characteristics. The scope of the invention is defined in the appended claims, rather than in the specific description preceding them. All embodiments that fall within the meaning and range of equivalency of the claims are therefore intended to be embraced by the claims.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention provides systems and methods for ablating tissue inside a living body. The invention creates elongated lesions, which can be either straight or curvilinear. The invention also creates patterns of lesions, which can be either simple or complex.

The invention lends itself to use in many relatively noninvasive catheter-based procedures. In contrast with complex, invasive surgical procedures, these catheter-based procedures introduce ablation elements into interior regions of the body by steering them through a vein or artery.

The Specification that follows focuses upon a particular field of use, which is the treatment of cardiac disease. Still,



US 6,241,754 B1

7

the diverse applicability of the invention in other fields of use will also become apparent.

FIG. 1 shows a simplified and somewhat diagrammatic perspective view of the human heart 10.

The views of the heart 10 shown in FIG. 1 and other Figures in this Specification are not intended to be anatomically accurate in every detail. The Figures show views of the heart 10 in diagrammatic form as necessary to show the features of the invention.

As will be described in greater detail later, one application of the invention provides systems and methodologies for forming long, curvilinear ablation patterns inside the heart 10.

The Figures focus upon the details of using the invention to form long, curvilinear lesions for the treatment of atrial fibrillation. It should be appreciated, however, that the invention has applicability for use in other regions of the heart to treat other cardiac conditions. The invention also has application in other regions of the body to treat other maladies.

FIG. 1 shows the significant heart chambers and the blood vessels that service them. FIG. 1 shows the right and left right atria, respectively 12 and 14. FIG. 1 also shows the right and left ventricles, respectively 16 and 18.

FIG. 1 further shows the atrial septum 20 that separates the right and left atria 12/14. FIG. 1 also shows the ventricular septum 21 that separates the right and left ventricles 16/18.

As FIG. 1 further shows, the tricuspid valve 22 joins the right atrium 12 with the right ventricle 16. The mitral (bicuspid) valve 24 joins the left atrium 14 with the left ventricle 18.

The superior vena cava 26 (the "SVC") and the inferior vena cava 28 (the "IVC") open into the right atrium 12. The pulmonary veins 30 (the "PV's") open into the left atrium 14. The pulmonary artery 32 leads from the right ventricle 16. The aorta 34 leads from the left ventricle 18.

During normal sinus rhythm, blood enters the right atrium 12 through the SVC 26 and the IVC 28, while entering the left atrium 14 through the PV's 30. The atria 12/14 contract, and the blood enters the ventricles 16/18 (through the tricuspid and mitral valves 22 and 24, respectively). The ventricles 16/18 then contract, pumping the blood through the aorta and pulmonary arteries 32 and 34.

FIG. 2 shows a diagrammatic plan view of the atrial region of the heart 10. FIG. 2 shows the right atrium 12, the left atrium 14, and the atrial septum 20 dividing the right atrium 12 from the left atrium 14. FIG. 2 also shows the approximate location of the orifices of the SVC 26 and the IVC 28 entering the right atrium 12. FIG. 2 further shows the approximate location of the orifices of the PV's 30 entering the left atrium 14.

FIG. 2 also shows the atrial electrophysiology pertinent to the generation and treatment of atrial arrhythmias. FIG. 2 shows the SA node 36 located near the SVC 26. It also shows the AV node 38.

By folding the left-hand edge of the plan view of FIG. 2 against the center septum 20, one forms the three-dimensional contour of the right atrium 12. By folding the right-hand edge of the plan view of FIG. 2 against the center septum 20, one forms the three-dimensional contour of the left atrium 14.

FIG. 2 further shows a maze pattern 40 overlaid upon the plan view of the right and left atria 12 and 14. The particular maze pattern 40 shown is adopted from one developed by

8

Dr. Cox. See Cox et al., "The Surgical Treatment of Atrial Fibrillation," *The Journal of Cardiovascular Surgery*, Vol. 101, No. 4, pp. 569-592 (1991).

The maze pattern 40 directs the sinus impulse from the SA node 36 to the AV node 38 along a specified route. The route that the pattern 40 establishes includes a main conduction route 40A that leads circuitously from the SA node to the AV node. The route also includes multiple blind alleys 40B off the main conduction route 40A.

The pattern 40 is laid out to assure that the sinus impulse activates most of the atrial myocardium. Also, the pattern 40 blocks portions of the most common reentry circuits around the SVC 26, IVC 28, and the PV's 30. The lesion pattern 40 interrupts each of these common reentry circuits to thereby interrupt the generation of reentry circuits in these atrial regions.

The invention provides systems and methods for establishing the maze pattern 40, or one like it, without open heart surgery and without conventional surgical incisions.

The systems and methods that embody the invention ablate myocardial tissue in the atria. In the process, they form elongated (i.e., long and thin) and sometimes curvilinear lesions (designated "L" in FIG. 2). The lesions L destroy the myocardial tissue in those regions where reentry circuits usually occur. Electrical conduction is interrupted in the regions the lesions L occupy.

The presence of the lesions L force electrical impulses emanating in the SA node 36 to follow the open (i.e., not ablated) myocardial regions, which extend between the lesions L. The open regions form a circuitous path leading from the SA node 36 to the AV node 38, while eliminating reentry pathways.

In this way, the lesions L prevent atrial fibrillation from occurring.

The lesions L thus serve the same purpose as the incisions made during a surgical maze procedure. However, they do not require an invasive and costly surgical technique. Instead, according to the invention, the physician forms the lesions L without opening the heart. Instead, the physician maneuvers one or more ablation elements through a vein or artery into the atria.

For this purpose, the systems and methods that embody the invention provide a family of ablating elements. Numeral 42 generally designates each individual element in FIGS. 5 to 10 and 25 to 41. In use, the elements 42 form various curvilinear lesion patterns.

In the preferred embodiments, the elements 42 create the lesions L by thermally destroying myocardial tissue by the application of electromagnetic energy. In the particular illustrated embodiments, the elements 42 emit radiofrequency electromagnetic energy. Alternatively, microwave electromagnetic energy or light (laser) energy could be employed for the same purpose.

The direct emission of heat energy by an elongated element by resistance heating does not form uniformly long, thin lesion patterns as defined by the invention. Direct heating of an elongated element results in lesion patterns having regions of charring that offer no therapeutic benefit.

Still, it is believed the invention can be adapted to other ablation techniques that do not involve the direct contact between a resistance heated element and tissue. For example, it is believed that long, thin, and curvilinear lesions can be formed by destroying myocardial tissue by cooling or by injecting a chemical substance that destroys myocardial tissue.

US 6,241,754 B1

9

The preferred embodiments of the invention provide two general categories or types of curvilinear ablating elements **42** that emit radiofrequency energy.

FIGS. **5** to **14** show one preferred category of radiofrequency ablating elements **42**. In this category, the ablating elements **42** make intimate contact against the atrial wall to create an array of adjoining curvilinear lesions **L** all at once. One of these types of elements **42**, once deployed, can form all or substantially all of desired maze pattern. This category of ablating elements will sometimes be identified as "Category 1 Curvilinear Ablating Elements."

According to another aspect of the invention, the Category 1 Ablating Elements share a common delivery system **44**. The delivery system **44** introduces and deploys a selected Category 1 Ablating Elements in the atria **12/14**.

FIGS. **27** to **55** show another preferred category of radiofrequency ablating elements **42**. In this category, the ablating elements **42** make intimate contact against the atrial wall to create discrete elongated, curvilinear lesions **L**, one at a time. The physician individually deploys these ablating elements **42** in succession to form the desired maze pattern. This category of ablating elements will sometimes be identified as "Category 2 Curvilinear Ablating Elements."

Unlike the Category 1 Ablating Elements, the Category 2 Ablating Elements do not require a delivery system **44** for introduction and deployment in the atria **12/14**. The Category 2 Ablating Elements are steerable. They can be introduced into the atria **12/14** like a conventional steerable catheter.

#### THE DELIVERY SYSTEM

FIGS. **15** to **26** best show the details of common delivery system **44**.

Using the delivery system **44**, the physician first introduces a selected ablating element **42** into the right atrium **12** through the femoral vein (as FIG. **20** generally shows). The physician transmits radiofrequency ablating energy through the ablating element **42** to create the curvilinear lesion **L** or pattern of lesions **L** in the myocardium of the right atrium **12**.

Once the desired lesion pattern is made in the right atrium, the physician enters the left atrium **14** through the atrial septum **20** (as FIGS. **25** and **26** generally show). The physician deploys another selected ablating element **42** into the left atrium **14** by puncturing through the atrial septum **20** (as FIG. **26** generally shows). The physician transmits radiofrequency ablating energy through the ablating element **42** to create the desired curvilinear lesion **L** or pattern of curvilinear lesions **L** in the myocardium of the left atrium **14**.

To carry out the above sequence of steps, the delivery system **44** includes an introducer **46** and an outer guide sheath **48** (see FIGS. **15** and **16**). Both the introducer **46** and the guide sheath **48** are made from inert plastic materials, like polyester.

As FIG. **15** shows, the introducer **46** has a skin-piercing cannula **50**. The physician uses the cannula **50** to establish percutaneous access into the femoral vein.

The exposed end of the introducer **46** includes a conventional hemostatic valve **52** to block the outflow of blood and other fluids from the access. The valve **52** may take the form of a conventional slotted membrane or conventional shutter valve arrangement (not shown).

The hemostatic valve **52** allows the introduction of the outer guide sheath **48** through it, as FIG. **16** shows.

The introducer **46** also preferably includes a flushing port **54** for introducing anticoagulant or other fluid at the access site, if required.

10

In the illustrated and preferred embodiment, the delivery system **44** also includes a guide catheter **60** for directing the outer guide sheath **48** into the right and left atria **12** and **14**.

In one embodiment (see FIG. **16**), the guide catheter **60** takes the form of a conventional steerable catheter with active steering of its distal tip. Alternatively, the guide catheter **60** can take the form of a catheter with a precurved distal tip, without active steering, like a conventional "pig tail" catheter. The catheter with a precurved distal tip is most preferred, because of its simplicity and lower cost. However, for the purposes of this Specification, the details of a catheter with active steering of the distal tip will also be discussed.

As FIG. **16** shows, the steerable catheter **60** includes a catheter body **68** having a steerable tip **70** at its distal end. A handle **72** is attached to the proximal end of the catheter body **68**. The handle **72** encloses a steering mechanism **74** for the distal tip **70**.

The steering mechanism **74** can vary. In the illustrated embodiment (see FIG. **17**), the steering mechanism is the one shown in Copending U.S. application Ser. No. 07/789,260, which is incorporated by reference.

As FIG. **17** shows, the steering mechanism **74** of this construction includes a rotating cam wheel **76** within the handle **72**. An external steering lever **78** rotates the cam wheel. The cam wheel **76** holds the proximal ends of right and left steering wires **80**.

The steering wires **80** extend along the associated left and right side surfaces of the cam wheel **76** and through the catheter body **68**. The steering wires **80** connect to the left and right sides of a resilient bendable wire or spring (not shown). The spring deflects the steerable distal tip **70** of the catheter body **68**.

As FIG. **16** shows, forward movement of the steering lever **80** bends the distal tip **70** down. Rearward movement of the steering lever **80** bends the distal tip **70** up. By rotating the handle **70**, the physician can rotate the distal tip **70**. By manipulating the steering lever **80** simultaneously, the physician can maneuver the distal tip **70** virtually in any direction.

FIGS. **18** and **19** show the details of using the steerable catheter **60** to guide the outer sheath **48** into position.

The outer guide sheath **48** includes an interior bore **56** that receives the steerable catheter body **68**. The physician can slide the outer guide sheath **48** along the steerable catheter body **68**.

The handle **58** of the outer sheath **48** includes a conventional hemostatic valve **62** that blocks the outflow of blood and other fluids. The valve **62**, like the valve **52**, may take the form of either a resilient slotted membrane or a manually operated, shutter valve arrangement (not shown).

Together, the valves **52** and **62** provide an effective hemostatic system. They allow performance of a procedure in a clean and relatively bloodless manner.

In use, the steerable catheter body **68** enters the bore **56** of the guide sheath **48** through the valve **62**, as FIG. **18** shows. The handle **58** of the outer sheath **48** also preferably includes a flushing port **64** for the introduction of an anticoagulant or saline into the interior bore **56**.

As FIG. **18** also shows, the physician advances the catheter body **68** and the outer guide sheath **48** together through the femoral vein. The physician retains the sheath handle **58** near the catheter handle **72** to keep the catheter tip **70** outside the distal end of the outer sheath **48**,

In this way, the physician can operate the steering lever **78** to remotely point and steer the distal end **70** of the catheter

US 6,241,754 B1

11

body 68 while jointly advancing the catheter body 68 through the femoral vein.

The physician can observe the progress of the catheter body 68 using fluoroscopic or ultrasound imaging, or the like. The outer sheath 48 can include a radio-opaque compound, such as barium, for this purpose. Alternatively, a radio-opaque marker can be placed at the distal end of the outer sheath 16.

This allows the physician to maneuver the catheter body 68 through the femoral vein into the right atrium 12, as FIG. 18 shows.

As FIG. 19 shows, once the physician locates the distal end 70 of the catheter body 68 in the right atrium 12, the outer sheath handle 58 can be slid forward along the catheter body 68, away from the handle 72 and toward the introducer 46. The catheter body 68 directs the guide sheath 48 fully into the right atrium 12, coextensive with the distal tip 70.

Holding the handle 58 of the outer sheath 48, the physician withdraws the steerable catheter body 68 from the outer guide sheath 48.

The delivery system 44 is now deployed in the condition generally shown in FIG. 20. The system 44 creates a passageway that leads through the femoral vein directly into the right atrium 12. The delivery system 44 provides this access without an invasive open heart surgical procedure.

Alternatively, the outer guide sheath 48 can itself be preshaped with a memory. The memory assumes a prescribed curvature for access to the right or left atrium 12 or 14 through venous access, without need for a steerable catheter 60.

To assist passage through the atrial septum 20, the delivery system 44 includes a transeptal sheath assembly 82. The delivery system 44 guides the sheath assembly 82 into the right atrium 12 and through the atrial septum 20 (see FIGS. 25A and 25B) to open access to the left atrium 14.

The delivery system 44 further includes ablation probes 66 to carry a selected ablating element 42. FIG. 20 shows the common structural features shared by the ablation probes 66. Each ablating probe 66 has a handle 84, an attached flexible catheter body 86, and a movable hemostat sheath 88 with associated carriage 90. Each ablating probe 66 carries at its distal end a particular type of curvilinear ablating element 42.

## CATEGORY 1

### CURVILINEAR ABLATING ELEMENTS

FIGS. 5 to 14 show structures representative of Category 1 Curvilinear Ablating Elements 42 that the probes 66 can carry. Elements 42 in this category take the form of various three-dimensional structures, or baskets 92.

The basket 92 can be variously constructed. In the illustrated and preferred embodiment, the basket 92 comprises a base member 98 and an end cap 100. An array of generally resilient, longitudinal splines 102 extend in a circumferentially spaced relationship between the base member 98 and the end cap 100. They form the structure of the basket 92. The splines 102 are connected between the base member 98 and the end cap 100 in a resilient, pretensed condition.

The basket 92 also include one or more transverse bridge splines 108 that periodically span adjacent longitudinal splines 102.

The splines 102/108 collapse into a closed, compact bundle in response to an external compression force. This occurs when they are captured within the movable hemostat

12

sheath 88, as FIG. 21 shows. As will be described in greater detail later, the splines 102/108 are introduced through the delivery system 44 in this collapsed state.

Upon removal of the compression force, the splines 102/108 resiliently spring open to assume their three-dimensional shape. In this condition, the resilient splines 102/108 bend and conform to the tissue surface they contact. The atrial wall is also malleable and will also conform to the resilient splines 102/108. The splines 102/108 thereby make intimate contact against the surface of the atrial wall to be ablated, despite the particular contours and geometry that the wall presents.

In the embodiment shown in FIGS. 5A/5B, six longitudinal splines 102 and six transverse bridge splines 108 form the basket 92. However, additional or fewer splines 102/108 could be used, depending upon continuity and complexity of the maze pattern wanted.

The splines 102/108 can be made of a resilient inert material, like Nitinol metal or silicone rubber. In the illustrated and preferred embodiment, each longitudinal spline 102 is rectangular in cross section and is about 1.0 to 1.5 mm wide. The bridge splines 108 are generally cylindrical lengths of material.

As FIGS. 5A/5B best show, the splines 102 include regions 104 that are electrically conductive (called the "conductive regions"). The splines 102 also include regions 106 that are electrically not conductive (called the "nonconductive regions").

In FIGS. 5A/5B, the bridge splines 108 comprise conductive regions 104 along their entire lengths.

The conductive regions 104 function as radiofrequency emitting electrodes held by the splines 102/108 in intimate contact against the atrial wall. These regions 104 emit radiofrequency ablating energy, when applied. The emitted energy forms the curvilinear lesions L in the myocardial tissue that generally conform to the propagation pattern of the emitted energy.

The lesions L formed by the conducting electrode regions 104 appear in juxtaposition with normal tissue that the nonconductive regions 106 contact. It is this juxtaposition of ablated tissue with normal tissue that forms the desired maze pattern.

The regions 104/106 can be variously created on the splines 102/108, depending upon the underlying material of the splines 102/108 themselves.

For example, when the splines 102/108 are made of an electrically conductive material, such as Nitinol, the electrically conductive regions 104 can consist of the exposed Nitinol material itself. In addition, the conductive regions 104 can be further coated with platinum or gold by ion beam deposition and the like to improve their conduction properties and biocompatibility. In this arrangement, insulating material is applied over regions of the Nitinol metal to form the nonconductive regions 106.

When the splines 102/108 are not made of an electrically conducting material, like silicone rubber, the conductive regions 104 are formed by coating the exterior surfaces with an electrically conducting material, like platinum or gold, again using ion beam deposition or equivalent techniques.

FIGS. 5A/5B and 4A/4B purposely exaggerate the diameter difference between the electrically conducting regions 104 and electrically nonconducting regions 106 to illustrate them. Actually, the diameter difference between the two regions 104/106 are approximately 0.05 mm to 0.1 mm, which is hard to detect with the naked eye, as FIGS. 7 to 14 show with greater realism.



US 6,241,754 B1

13

The relative position of the conductive regions **104** and the nonconductive regions **106** on each spline **102**, and the spaced apart relationship of the splines **102** and the bridge splines **108** take in the basket **92**, depend upon the particular pattern of curvilinear lesions **L** that the physician seeks to form.

FIG. **5A** shows a basket **RA**. Upon being deployed in the right atrium **12** and used to emit radiofrequency ablating energy, the basket **RA** creates the pattern of curvilinear lesions **L** shown in the left hand (i.e., right atrium) side of FIG. **2**. The basket **RA** forms this pattern of lesions **L** essentially simultaneously when ablating energy is applied to it.

FIG. **5B** shows a basket **LA**. Upon being deployed in the left atrium **14** and used to emit ablating energy, the basket **LA** creates the pattern of curvilinear lesions **L** shown in the right hand (i.e., left atrium) side of FIG. **2**. Like basket **RA**, the basket **LA** forms this pattern of lesions **L** essentially simultaneously when ablating energy is applied to it.

FIGS. **3** and **4** generally show the methodology of assembling the splines **102/108** into the baskets **RA** and **LA**.

As FIG. **3** shows, the splines **102** are first laid out in an equally spaced arrangement upon a template **109**. The template **109** displays the desired lesion pattern for the right and left atria **12** and **14**.

FIG. **3** shows splines **R1** to **R6** laid out upon the template **109** where the lesion pattern for the right atrium **12** is displayed. FIG. **3** shows splines **L1** to **L6** laid out upon the template **109** where the lesion pattern for the left atrium is displayed.

The template **109** displays longitudinal lesion areas; that is, lesions **L** that run generally vertically on the template **109**. The template **109** also displays transverse lesion areas; that is, lesions **L** that run generally horizontally on the template **109**. The template **109** also displays areas that are to be free of lesions **L**.

Those portions of the splines **R1–R6/L1–L6** that overlay a longitudinal lesion area must be electrically conducting to ablate tissue. These areas of the template **109** identify the electrically conducting regions **104** of the splines **R1–R6/L1–L6**.

Those portions of the splines **R1–R6/L1–L6** that do not overlay a desired longitudinal lesion area must not be electrically conducting to create lesion-free areas. These areas of the template **109** identify the electrically nonconductive regions **106** of the splines **R1–R6/L1–L6**.

Electrically conducting or electrically insulating material are therefore applied, as appropriate, to the splines to form the regions **104/106** the template **109** identifies, as FIGS. **4A** and **4B** show. FIG. **4A** shows these regions **104/106** formed on the splines **R1–R6**. FIG. **4B** shows these regions **104/106** formed on the splines **L1–L6**.

In FIGS. **4A** and **4B**, the splines are made from an electrically conducting material (i.e., Nitinol), so an electrically insulating material is applied to form the nonconducting regions **106**. The areas free of the electrically insulating material form the conducting regions **104**.

The bridge splines **108** are positioned where the template **109** displays transverse lesion areas (shown in FIG. **3**). The bridge splines **108** are soldered or otherwise fastened to the adjacent longitudinal splines **102**. The bridge splines **108** are electrically conducting to ablate these transverse regions of tissue. The transverse lesions link the longitudinal lesions to create the circuitous bounds of the maze.

The invention therefore forms the template **109** that lays out the desired lesion pattern. The invention then uses the

14

template **109** to identify and locate the conductive and nonconductive regions **104** and **106** on the longitudinal splines **R1–R6/L1–L6**. The template **109** is also used to identify and locate the bridge splines **108** between the longitudinal splines. The baskets **RA** and **LA** are then completed by attaching the base members **98** and end caps **100** to opposite ends of the longitudinal splines.

As FIG. **6** shows, each spline **102** is electrically coupled to a signal wire **110** made of an electrically conductive material, like copper alloy. The signal wires **110** extend through the base member **98** and catheter body **86** into the probe handle **84**. Connectors **112** (shown in FIG. **20**) attach the proximal ends of the signal wires **110** to an external source **114** of ablating energy.

The source **114** applies ablating energy to selectively activate all or some splines **102**. The source **114** applies the ablating energy via the signal wires **110** to create iso-electric paths along the splines **102/108** conforming to the desired lesion pattern. Creation of iso-electric paths along the splines **102/108** reduces ohmic losses within the probe **66**.

As FIG. **6** shows, the applied energy is transmitted by the conducting regions **104** of the splines **102/108**. It flows to an exterior indifferent electrode **116** on the patient.

FIG. **20** shows the introduction of the catheter body **86** of the ablation probe **66** and its associated ablating element **42**. The element **42** takes the form of basket **RA** shown in FIG. **5A**.

Before introducing the ablation probe **66**, the physician advances the hemostat sheath **88** along the catheter body **86**, by pushing on the carriage **90**. The sheath **88** captures and collapses the basket **RA** with it, as FIG. **21** also shows.

As FIG. **22** shows, the physician introduces the hemostat sheath **88**, with the enclosed, collapsed basket **RA**, through the hemostatic valve **62** of the outer sheath handle **58**. The sheath **88** and enclosed basket **RA** enter the guide sheath **48**. The hemostat sheath **88** protects the basket splines **102/108** from damage during insertion through the valve **62**.

As FIG. **23** shows, when the catheter body **86** of the ablation probe **66** advances approximately three inches into the guide sheath **48**, the physician pulls back on the sheath carriage **90**. This withdraws the hemostat sheath **88** from the valve **62** along the catheter body **86**. The hemostat valve **62** seals about the catheter body **86**. The interior bore **56** of the guide sheath **48** itself now encloses and collapses the basket **RA**, just as the sheath **88** had done.

As FIGS. **23** and **24** show, the guide sheath **48** directs the catheter body **86** and attached basket **RA** of the ablation probe **66** into the right atrium **12**. As the basket **RA** exits the distal end of the guide sheath **48**, it will spring open within the right atrium **12**, as FIG. **24** shows. The resilient splines **102/108** bend and conform to the myocardial surface of the right atrium **12**.

In the illustrated and preferred embodiment (as FIG. **24** shows), the physician also deploys an ultrasonic viewing probe **118** through the femoral vein into the right atrium **12**, either within or outside the guide sheath **48**. Alternatively, fluoroscopy could be used. The physician operates the viewing probe **118** to observe the basket **RA** while maneuvering the basket **RA** to orient it within the right atrium **12**. Aided by the probe **118**, the physician can withdraw the basket **RA** back into the guide sheath **48**. The physician can rotate the handle **84** to rotate the basket **RA**, and then redeploy the basket **RA** within the right atrium **12**, until the physician achieves the desired orientation for the basket **RA**.

The physician now takes steps to ablate the myocardial tissue areas contacted by the conducting regions **104** of the

US 6,241,754 B1

15

basket RA. In this way, the physician forms the desired pattern of lesions L in the right atrium 12.

Upon establishing the desired lesion pattern, the physician withdraws the ablation probe 66 from the guide sheath 48, by that removing the basket RA from the right atrium 12. Aided by the viewing probe 118 (as FIG. 25A shows), the physician advances the guide sheath 48 further into the right atrium 12 into nearness with a selected region of the atrial septum 20.

To simplify placement of the guide sheath 48 next to the atrial septum 20, the physician preferably deploys the steerable catheter body 68 through the guide sheath 48 in the manner generally shown in FIGS. 18 and 19. Keeping the steerable tip 70 outside the distal end of the outer sheath 48, the physician operates the steering lever 78 to remotely point and steer the catheter body 68 across the right atrium toward the atrial septum 20, aided by the internal viewing probe 118, or by some external ultrasound or fluoroscopic imaging, or both.

Once the physician locates the distal end 70 of the catheter body 68 next to the desired site on the atrial septum 20, the physician slides the outer sheath 48 forward along the catheter body 68. The catheter body 68 directs the guide sheath 48 fully across the right atrium 12, coextensive with the distal tip 70 next to the atrial septum 20.

The physician withdraws the steerable catheter body 68 from the outer guide sheath 48 and (as FIG. 25A and 25B show) advances the transeptal sheath assembly 82 through the now-positioned guide sheath 48 into the atrial septum 20. The viewing probe 118 can be used to monitor the position of the guide sheath 48 and the advancement of the transeptal sheath assembly 82 toward the atrial septum 20.

As FIG. 25B shows, the transeptal sheath assembly 82 includes a cutting edge or dilator 122 that carries a sharpened lead wire 120. As the physician advances the transeptal sheath assembly 82, the lead wire 120 forms an initial opening in the septum 20. The dilator 122 enters this opening, enlarging it and punching through to the left atrium 14 (as FIG. 25B shows).

The Figures exaggerate the thickness of the atrial septum 20. The atrial septum 20 comprises a translucent membrane significantly thinner than the Figures show. This transeptal approach is a well known and widely accepted technique used in other left atrium access procedures.

The physician then slides the guide sheath 48 along the transeptal sheath assembly 82 and into the left atrium 14. The physician withdraws the transeptal sheath assembly 82 from the guide sheath 48. The guide sheath 48 now forms a path through the femoral vein and right atrium 12 into the left atrium 14 (as FIG. 26 shows).

The physician now introduces through the guide sheath 48 the catheter body 86 of another ablation probe 66 and its associated ablating element 42. At this step in the procedure, the ablating element 42 takes the form of basket LA shown in FIG. 5B. The physician advances the hemostat sheath 88 along the catheter body 86, as before described, to capture and collapse the basket LA. The physician introduces the hemostat sheath 88, with the enclosed, collapsed basket LA, through the hemostatic valve 62 of the outer sheath handle 58, and then withdraws the hemostat sheath 88.

Just as FIGS. 23 and 24 show the introduction of the basket RA into the right atrium 12, FIG. 26 shows the guide sheath 48 directing the basket LA into the left atrium 14. As the basket LA exits the distal end of the guide sheath 48, it will spring open within the left atrium 14, as FIG. 26 shows.

As FIG. 26 also shows, the physician also deploys the viewing probe 118 through the opening made in the atrial

16

septum 20 into the left atrium 14. The physician operates the viewing probe 118 while maneuvering the basket LA to orient it within the left atrium 14. Aided by the probe 118, the physician can withdraw the basket LA back into the guide sheath 48, rotate the handle 84 to rotate the basket LA, and then redeploy the basket LA within the left atrium 14. The physician repeats these steps, until the desired orientation for the basket LA is achieved.

The physician now takes steps to ablate the myocardial tissue areas contacted by the conducting regions 104 of the basket LA. In this way, the physician forms the desired pattern of lesions L in the left atrium 14.

Upon establishing the desired lesion pattern, the physician withdraws the ablation probe 66 from the guide sheath 48, removing the basket LA from the left atrium 14. The physician then withdraws the guide sheath 48 from the heart and femoral vein. Last, the physician removes the introducer 46 to complete the procedure.

FIGS. 7 to 14 show alternative embodiments of ablating elements 42(1) to 42(7) that the ablation probe 66 can carry. The delivery system 44 as just described can be used to introduce and deploy each alternative ablating element 42(1) to 42(7) in the same way as baskets RA and LA.

The alternative ablating elements 42(1) to 42(5) shown in FIGS. 7 to 12 share many features that are common to that baskets RA and LA shown in FIGS. 5A and 5B. Consequently, common reference numerals are assigned.

The alternative elements 42(1)/(2)/(3)/(4)/(5) all take the form of a three-dimensional basket, designated 92(1), 92(2), 92(3), 92(4), and 92(5) respectively.

As before described, each basket 92(1)/(2)/(3)/(4)/(5) comprises a base member 98 and an end cap 100. As also earlier described, an array of generally resilient, longitudinal splines 102 extend in a circumferentially spaced relationship between the base member 98 and the end cap 100. They form the structure of the baskets 92(1)/(2)/(3)/(4)/(5).

As before described, the splines 102 are made of a resilient inert material, like Nitinol metal or silicone rubber. They are connected between the base member 98 and the end cap 100 in a resilient, pretensed condition.

Like the baskets RA and LA, the splines 102 of each basket 92(1)/(2)/(3)/(4)/(5) collapse for delivery into the atria 12/14 in a closed, compact bundle (as FIG. 21 generally shows). The splines 102 of each basket 92(1)/(2)/(3)/(4)/(5) also resiliently spring open to assume their three-dimensional shape when deployed in the atria 12/14, bending and conforming to the surrounding myocardial tissue surface.

As in the baskets RA and LA (shown in FIGS. 5A/5B), the splines 102 of each basket 92(1)/(2)/(3)/(4)/(5) include electrically conductive regions 104 juxtaposed with electrically nonconductive regions 106. These regions 104 and 106 are located and formed on the splines 102 of the baskets 92(1)/(2)/(3)/(4)/(5) using the same template 109 (shown in FIG. 3) and using the same surface alteration techniques (shown in FIGS. 4A/4B). As previously explained, the diameter differences between the two regions 104/106 are hard to detect with the naked eye, as FIGS. 7 to 10 show.

As before described, the conductive regions 104 function as radiofrequency emitting electrodes that form the curvilinear lesions L in the tissue that the conductive regions 104 contact. These lesion areas are juxtaposed with normal tissue that the nonconductive regions 106 contact.

Instead of the bridge splines 108 that the basket RA and LA carry, the baskets 92(1)/(2)/(3)/(4)/(5) use alternative

US 6,241,754 B1

17

assemblies to form the transverse lesion regions spanning adjacent transverse splines 102.

The ablating element 42(1) shown in FIGS. 7 and 11 includes, as an integral part, a steerable distal element 124 carried within the open interior area 96 of the basket 92(1). As FIG. 11 shows, the distal element 124 is itself part of a conventional steerable catheter assembly 128 that forms an integral part of the associated ablating probe 66(1).

The distal element 124 carries an electrode 126 comprising a strip of electrically conducting material, like Nitinol wire. In use, the electrode 126 serves as a single movable bridge electrode. In successive motions controlled by the physician, the single bridge electrode 126 can be positioned and ablating energy applied to it, to thereby make all the transverse lesions that the particular maze pattern requires. The single steerable bridge electrode 126 of the basket 92(1) thereby serves the function of the several fixed bridge splines 108 of the baskets RA and LA.

The bridge electrode 126 can also be used to "touch up" or perfect incomplete lesions patterns formed by the longitudinal splines 102.

The proximal end of the steering assembly 128 of the probe 66(1) includes a handle 130 (as FIG. 11 shows). A guide tube 132 extends from the handle 130, through the body 86(1) of the probe 66(1), and into the interior area 96 of the basket 92(1). The steerable distal element 124 and bridge electrode 126 make up the distal end of the guide tube 132.

The handle 130 encloses a steering mechanism 134 for the steerable distal element 124 and associated bridge electrode 126. The steering mechanism 134 for the assembly 128 is the same as the steering mechanism 74 for the distal tip 70 of the catheter 60 (shown in FIG. 17) and will therefore not be described again.

By manipulating the steering assembly 128 (as shown by arrows M1, M2, and M3 in FIG. 11), the physician can remotely steer the element 124 and the associated bridge electrode 126 in three principal directions inside the basket 92(1) (as shown arrows M1, M2 and M3 in FIG. 7).

First, by remotely pulling and pushing the handle 130, the physician moves the element 124 and bridge electrode 126 along the axis of the basket 92(1), in the direction of arrows M1 in FIGS. 7 and 11.

Second, by remotely rotating the handle 130, the physician rotates the element 124 and associated bridge electrode 126 about the axis of the basket 92(1), in the direction of arrows M2 in FIGS. 7 and 11.

Third, by manipulating the steering mechanism 134 by rotating the steering lever 136 (see FIG. 11), the physician bends the distal element 124, and with it, the bridge electrode 126 in a direction normal to the axis of the basket 92(1), in the direction of arrows M3 in FIGS. 7 and 11.

By coordinating lateral (i.e., pushing and pulling) movement of the handle 130 with handle rotation and deflection of the distal element 124, it is possible to move the bridge electrode 126 into any desired position, either between any two adjacent longitudinal splines 102 or elsewhere within the reach of the basket 92(1). Preferably, the physician deploys the interior viewing probe 118 or relies upon an external fluoroscopic control technique to remotely guide the movement of the bridge electrode 126 for these purposes.

The ablating element 42(2) shown in FIG. 8 includes, as an integral part, an internal electrode structure 138 that comprises a single length of wire material, such as Nitinol, preshaped to assume a helical array.

18

In FIG. 8, the helical electrode structure 138 extends from the base member 98 and spirals within the interior area 96 of the basket 92(2). Along its spiraling path within the basket 92(2), the helical electrode structure 138 creates interior points of contact 140 with the longitudinal splines 102. The structure 138 is slidably attached by eye loops 103 to the splines 102 at these interior points of contact 140.

The helical electrode structure 138 spanning the interior points of contact 140 includes regions 146 that are electrically conducting and regions 148 that are not electrically conducting. The precise location of the regions 146 and 148 along the spiraling path of the electrode structure 138 will depend upon the pattern of transverse lesions required.

Where a transverse lesion L is required, the structure 138 will include an electrically conducting region 146 between two points of contact 140 with adjacent splines 102. The points of contact 140 will also be conducting regions 104. In this way, the structure 138 serves to conduct ablating energy, when applied, between adjacent splines 102, just as the presence of the bridge splines 108 did in the baskets RA and LA.

Where a transverse lesion is not required, the structure 138 will include an electrically nonconducting region 148 between two points of contact 140 with adjacent splines 102. The points of contact 140 will also be nonconducting regions 106. In this way, the structure 138 will not conduct ablating energy between adjacent splines 102. The structure 138 in these regions 148 serve just as the absence of the bridge splines 108 did in the baskets RA and LA.

The electrically conducting regions 146 and electrically nonconducting regions 148 are formed along the helical structure 138 in the same way the comparable conducting and nonconducting regions 104 and 106 of the longitudinal splines 102 are formed.

The helical structure 138 captured within the basket 92(2) serves the same function as the bridge splines 108 of the baskets RA and LA in creating zones of transverse lesions.

The shape of the helical structure 138, its interior points of contact 140 with the longitudinal splines 102, and the location of the conducting and nonconducting regions 146 and 148 are, like the location of the regions 104/106 on the longitudinal splines 102, predetermined to create the desired pattern of longitudinal and transverse lesions L when ablating energy is applied.

As with baskets RA and LA, these considerations for the basket 92(2) will require a particular arrangement of elements for use in the right atrium 12 and another particular arrangement of elements for use in the left atrium 14.

The helical electrode structure 138 will collapse laterally upon itself as the basket 92(2) itself collapses inward in response to an external compression force. The basket 92(2) can thereby be introduced into the atria 12/14 in the same manner as the baskets RA and LA. The structure 138 will assume its helical shape when the basket 92(2) springs open with the removal of the compression force. The basket 92(2) can thereby be deployed for use within the atria 12/14 in the same manner as the baskets RA and LA.

The ablating element 42(3) shown in FIG. 9 is similar in many respects to the ablating element 42(2) shown in FIG. 8. The ablating element 42(3) includes, as an integral part, an internal electrode structure 142. Like the structure 138 shown in FIG. 8, the structure 42(3) comprises a single length of wire material, such as Nitinol, preshaped to assume a helical array.

In FIG. 9, like the structure 138 in FIG. 8, the helical electrode structure 142 extends from the base member 98.



US 6,241,754 B1

19

However, unlike the structure 138 shown in FIG. 8, the structure 142 in FIG. 9 spirals outside along the exterior surface of the basket 92(3). Like the structure 138, the structure 142 is slidably attached by eye loops 103 to the splines 102 at the exterior points of contact 144.

In other respects, the helical structure 138 and the helical structure 142 are essentially identical. Similar to the structure 138, the helical structure 142 spanning the points of contact 144 includes regions 146 that are electrically conducting and regions 148 that are not electrically conducting, depending upon the pattern of transverse lesions required. Where a transverse lesion L is required, the structure 142 will include an electrically conducting region 146. Similarly, where a transverse lesion is not required, the structure 142 will include an electrically nonconducting region 148.

The electrically conducting regions 146 and electrically nonconducting regions 148 are formed along the helical structure 142 in the same way the comparable conducting and nonconducting regions 104 and 106 of the longitudinal splines 102 are formed.

The helical structure 138 carried outside the basket 92(3) serves the same function as the bridge splines 108 of the baskets RA and LA in creating zones of transverse lesions.

As with the structure 138, the shape of the helical structure 142, its exterior points of contact 144 with the longitudinal splines 102, and the location of the conducting and nonconducting regions 146 and 148 are predetermined to create the desired pattern of longitudinal and transverse lesions L when ablating energy is applied.

As with baskets RA and LA, and the basket 42(2), these considerations for the basket 92(3) will require a particular arrangement of elements for use in the right atrium 12 and another particular arrangement of elements for use in the left atrium 14.

The helical electrode structure 142, like the structure 138, will collapse laterally upon itself and spring back and open into its predetermined shape as the basket 92(3) itself collapses and opens. The basket 92(3) can be introduced and deployed into the atria 12/14 in the same manner as the baskets RA and LA and the basket 92(2).

FIGS. 12A and B show an alternative helical electrode structure 150 within a basket 92(4). The basket 92(4) is essentially identical to the baskets 92(2) and 92(3) previously described. The helical structure 150, like the structures 138 and 142, includes electrically conducting regions 146 and electrically nonconducting regions 148 formed along its length.

However, unlike the structures 138 and 142 shown in FIGS. 8 and 9, the structure 150 is not integrally attached to the basket 92(4). Instead, the structure 150 can be remotely moved by the physician between a retracted position near the base member 98 of the associated basket 92(4) (as FIG. 12A shows) and a deployed position within the basket 92(4) (as FIG. 12B shows).

The structure 150 occupies its retracted position when the basket 92(4) is collapsed within the guide sheath 48 for introduction into the selected atria 12/14, as FIG. 12A shows. The structure 150 is deployed for use after the basket 92(4) is deployed outside the distal end of the guide sheath 48 for use within the selected atria 12/14, as FIG. 12B shows.

In this embodiment, the electrode structure 150 comprises a length of memory wire, like Nitinol, that is preshaped into the desired helical shape. The structure 150 is attached to the distal end of a push/pull rod 152 that extends through a bore

20

153 in the body 154 of an associated probe 156. The push/pull rod 152 is attached at its proximal end to a slide control lever 158 that extends from the handle 160 of the probe 156. Fore and aft movement of the slide control lever 158 causes axial movement of rod 152 within the bore 153.

Pulling back upon the slide control lever 158 (as FIG. 12A shows) moves the rod 152 aft (i.e., toward the handle 160). The aft movement of the rod 152 draws the structure 150 out of the basket 92(4) and into the distal end of the probe body 154. As the structure 150 enters the confines of the bore 153, it resiliently straightens out, as FIG. 12A shows.

Pushing forward upon the slide control lever 158 (as FIG. 12B shows) moves the rod 152 forward (i.e., away from the handle 160). The forward movement of the rod moves the structure 150 out of the confines of the bore 153 and into the interior area 96 of the basket 92(4). Since the structure 150 possesses a resilient memory, it will return to its preformed helical shape as it exits the bore 153 and enters the basket 92(4), as FIG. 12B shows. The resilient memory of the structure 150 generally aligns the conductive and nonconductive regions 146 and 148 of the structure 150 with the conducting and nonconducting regions 104 and 106 of the longitudinal splines 102 to form the desired pattern of longitudinal and transverse lesions L.

The ablating element 42(5) shown in FIG. 10 includes an external basket 92(5) that encloses, as an integral part, an internal basket structure 212. The internal basket structure 212 includes several individual splines 214 of wire material, such as Nitinol, preshaped to assume a three-dimension array. The individual splines 214 extend from the base member 98 and transverse prescribed paths within the interior area 96 of the basket 92(5). The several paths the interior splines 214 create interior points of contact 216 with the longitudinal splines 102 of the exterior basket 92(5). The individual splines 214 are free to move with respect to the splines 102 at these interior points of contact 216.

The interior basket structure 212 spanning the interior points of contact 216 includes regions 218 that are electrically conducting and regions 220 that are not electrically conducting. The precise location of the regions 218 and 220 along the several paths of the interior splines 214 will depend upon the pattern of transverse lesions that is required.

Where a transverse lesion L is required, the interior basket structure 212 will include an electrically conducting region 218 between two points of contact 216 with adjacent exterior splines 102. The points of contact 216 will also be conducting regions 104. In this way, the interior basket structure 212 serves to conduct ablating energy, when applied, between adjacent splines 102, just as the presence of the bridge splines 108 did in the baskets RA and LA.

Where a transverse lesion is not required, the interior basket structure 212 will include an electrically nonconducting region 220 between two points of contact 216 with adjacent exterior splines 102. The points of contact will also be nonconducting regions 106. In this way, the interior basket structure 212 will not conduct ablating energy between adjacent exterior splines 102. The interior basket structure 212 in these regions 220 serve just as the absence of the bridge splines 108 did in the baskets RA and LA.

The electrically conducting regions 218 and electrically nonconducting regions 220 are formed along the interior splines 214 in the same way the comparable conducting and nonconducting regions 104 and 106 of the longitudinal exterior splines 102 are formed.

The interior basket structure 212 captured within the exterior basket 92(5) serves the same function as the bridge

US 6,241,754 B1

21

splines **108** of the baskets RA and LA in creating zones of transverse lesions.

The shape of the interior basket structure **212**, its interior points of contact **216** with the longitudinal exterior splines **102**, and the location of the conducting and nonconducting regions **218** and **220** are, like the location of the regions **104/106** on the longitudinal splines **102**, predetermined to create the desired pattern of longitudinal and transverse lesions L when ablating energy is applied.

As with baskets RA and LA, these considerations for the basket **92(5)** and associated interior basket structure **212** will require a particular arrangement of elements for use in the right atrium **12** and another particular arrangement of elements for use in the left atrium **14**.

The interior basket structure **212** will collapse upon itself as the exterior basket **92(5)** itself collapses inward in response to an external compression force. The double basket **92(5)/212** can be introduced into the atria **12/14** in the same manner as the baskets RA and LA. The double basket **92(5)/212** will reassume its shape when the baskets **92(5)/212** spring open with the removal of the compression force. The double basket **92(5)/212** can be deployed for use within the atria **12/14** in the same manner as the baskets RA and LA.

FIG. **13** shows yet another alternative embodiment of an ablating element **42(6)** that the ablation probe **66** can carry for introduction by the delivery system **44**.

The alternative element **42(6)** differs from the previously described multiple spline baskets **92(1)** to **(5)** in that it forms a single hoop **162**. The hoop **162** allows the physician to form, as part of the lesion pattern, lesions that substantially encircle the orifices of the SVC **26** and the IVC **28** in the right atrium **12** and the PV's **30** in the left atrium **14** (see FIG. **1**). Furthermore, by using one or more hoops **162** in succession, the physician can eventually form an entire lesion pattern.

As before described, the hoop **162** can be made of a resilient inert material, like Nitinol metal or silicone rubber. It extends from a base member **164** carried at the distal end of the catheter body of the associated ablating probe.

The hoop **162** can include electrically conductive regions **104** juxtaposed with electrically nonconductive regions **106**, if needed. Alternatively, the hoop **162** can comprise a single, adjoining conductive region **104**.

These regions **104** and **106** are located and formed on the hoop **162** using the same surface alteration techniques as before described.

As the baskets **92(1)/(2)/(3)/(4)/(5)**, the hoop **162** will resiliently collapse within the guide sheath **48** and resiliently spring open when deployed outside the guide sheath **48**. In this way the hoop **162** can be collapsed for delivery into the atria **12/14** and then be deployed within the atria **12/14**.

FIG. **14** shows yet another alternative embodiment of an ablating element **42(7)** that the ablation probe **66** can carry for introduction by the delivery system **44**.

This alternative element **42(7)** differs from the previously described multiple spline baskets **92(1)** to **(5)** and hoop **162** in that it comprises an inflatable balloon or bladder **166** made of a thermoplastic polymeric material, such as polyethylene. The bladder **166** is formed by either a free-blown process or a mold process.

The bladder **166** carries on its exterior surface a pattern of conduction regions **104** and nonconductive regions **106** to form the desired array of longitudinal and transverse lesions L.

22

In the illustrated and preferred embodiment, the conductive regions **104** are formed by coating the polymeric material of the bladder **166** with a conductive material. The nonconductive regions **106** are preserved free of the conductive material.

Coating of the conductive regions **104** may be accomplished by conventional sputter coating techniques. For example, gold can be sputtered onto the exterior surface of the bladder **166**. Alternatively, a two phase sputter coating process may be employed in which an initial layer of titanium is applied followed by an outer coating of gold. The procedure may also use an ion beam assisted deposition (IBAD) process. This process implants the conductive material into the polymer of the bladder **166**.

The conductive regions **104** of the bladder **166** are attached to signal wires (not shown) to conduct ablating energy to the conductive regions **104**.

As with previously described elements **42**, the difference in patterns in the right and left atria will require a particular pattern of conductive and nonconductive regions **104/106** for use in the right atrium **12** and another particular arrangement of conductive and nonconductive regions **104/106** for use in the left atrium **14**.

As FIG. **14** shows, the element **42(6)** includes one or more inflation lumens **168** that communicate with the interior of the bladder **166**. The lumens **168** communicate with a common fluid supply tube **172** that extends through the bore of the catheter body **170** of the associated probe **66**. As shown in phantom lines in FIG. **20**, the supply tube **172** extends beyond the probe handle **84** to an injection port **174**.

In use, the physician connects the port **174** to a source of fluid pressure (not shown), which is preferably a liquid such as water, saline solution, or the like. The bladder **166** is deployed in a collapsed position within the guide sheath **48** using the delivery system **44** already described. After maneuvering the distal end of the guide sheath **48** to the desired location within the right or left atria **12/14**, the physician deploys the bladder **166** outside the guide sheath **48**.

The physician then conducts positive fluid pressure through the supply tube **172** and lumen(s) **168** into the bladder **166**. The positive fluid pressure causes the bladder **166** to expand or inflate.

Preferably, the inflation occurs under relatively low pressures of approximately 3–10 psi. The inflation is conducted to the extent that the bladder **166** is filled and expanded, but not stretched. The electrical conductivity of the conductive regions **104** on the bladder **166** is thus not disturbed or impaired. The inflating bladder **166** assumes a prescribed three-dimension shape, just as the baskets **92(1)** to **92(5)**. The shape can vary, depending upon the shape of the bladder **166**. In the illustrated embodiment, the bladder **166** assumes a toroidal shape, with an interior central opening to allow blood flow through it.

Due to its pliant nature, the bladder **166**, when inflated, naturally conforms to the topography of the surrounding atria **12/14** surface, and vice versa, like the baskets **92(1)** to **92(4)**.

By releasing the positive fluid pressure and applying negative pressure through the supply tube **172**, the physician can drain fluid from the bladder **166**. This collapses the bladder **166** for enclosure in the guide sheath **48** for maneuvering within the atria **12/14**.

As before described, aided by the viewing probe **118** or other means of fluoroscopic or ultrasonic monitoring, the

US 6,241,754 B1

23

physician can maneuver the bladder 166 within the atria 12/14. Aided by the probe 118, the physician can repeatedly inflate and deflate the bladder 166 to deploy and withdraw the bladder 166. from and into the guide sheath 48, while rotating it within the guide sheath 48, until the desired orientation for the bladder 166 within the atria 12/14 is achieved.

The physician now takes steps to ablate the myocardial tissue areas contacted by the conducting regions 104 of the bladder 166. In this way, the physician forms the desired pattern of lesions L in the atria 12/14.

Release of the positive fluid pressure and the application of negative pressure through the supply tube 172 collapses the bladder 166 for enclosure in the guide sheath 48 and removal from the atria 12/14.

#### CATEGORY 2

##### CURVILINEAR ABLATING ELEMENTS

FIGS. 27 to 55 show structures representative of Category 2 Curvilinear Ablating Elements 42 that the probes 66 can carry. Elements 42 in this category comprise a family of flexible, elongated ablating elements 176 (1) to (5) of various alternative constructions. In the preferred and illustrated embodiments, each element 176 is about 1 to 2.5 mm in diameter and about 1 to 5 cm long.

As FIG. 27 shows, each ablating element 176 is carried at the distal end of a catheter body 178 of an ablating probe 180. The ablating probe 180 includes a handle 184 at the proximal end of the catheter body 178. The handle 184 and catheter body 178 carry a steering mechanism 182 for selectively bending or flexing the ablating element 176 along its length, as the arrows in FIG. 27 show.

The steering mechanism 182 can vary. In the illustrated embodiment, the steering mechanism 182 is like that shown in FIG. 13. The steering mechanism 182 includes a rotating cam wheel 76 with an external steering lever 186. As FIG. 13 shows, the cam wheel holds the proximal ends of right and left steering wires 80. The wires 80 pass through the catheter body 178 and connect to the left and right sides of a resilient bendable wire or spring within the ablating element 176.

As FIG. 27 shows, forward movement of the steering lever 186 flexes or curves the ablating element 176 down. Rearward movement of the steering lever 186 flexes or curves the ablating element 176 up.

In this way the physician can flex the ablating element 176 in either direction along its length. Through flexing, the ablating element 176 is made to assume a multitude of elongated shapes, from a generally straight line to a generally arcuate curve, and all intermediate variable curvilinear shapes between. Through flexing, the ablating element 176 can also be brought into intimate contact along its entire ablating surface against the surface of the atrial wall to be ablated, despite the particular contours and geometry that the wall presents.

One or more signal wires (not shown) attached to the ablating element 176 extend through the catheter body 178 and terminate with an external connector 188 carried by the handle 184. The connector 188 plugs into a source of ablating energy (also not shown) to convey the ablating energy to the element 176.

By first remotely flexing the element 176 into the desired curvilinear shape and then applying ablating energy to it, the physician can form both elongated straight lesions and virtually an infinite variety of elongated, curvilinear lesions.

24

In use, the probe 180 and associated flexible ablating element 176 is introduced into the atria 12/14. Aided by the internal viewing probe 118 or another means of fluoroscopic or ultrasonic monitoring, the physician manipulates the steering lever 186 to steer the probe 180 into the desired atrial region.

For entry into the right atrium 12, the physician can direct the probe 180 through a conventional vascular introducer through the path shown in FIGS. 18 and 19, without using the delivery system 44. For entry into the left atrium 14, the physician can direct the probe 180 through a conventional vascular introducer retrograde through the aortic and mitral valves. Preferably, however, the physician can use the delivery system 44 to simplify access into the left atrium 14, in the manner shown in FIGS. 25 and 26.

Once in the desired region, the physician uses the same steering lever 186 to remotely bend the element 176 into the desired straight or curvilinear shape into intimate contact with the surrounding atrial wall. By then applying ablating energy to the shaped element 176, the physician forms a lesion that conforms to that shape.

By repeating this "shape-and-ablate" process within the atria 12/14, the physician eventually forms a contiguous pattern of straight and curvilinear lesions along the interior atrial surfaces. These lesions form the same desired patterns of longitudinal and transverse lesions that the three dimensional Category 1 Elements form all at once.

A single variable curvature ablating element 176 can be deployed within atria of various sizes and dimensions. Furthermore, a single variable curvature ablating element 176 can be used to form a multitude of different lesion patterns for the treatment of atrial fibrillation. Therefore, a single variable curvature ablating element 176 possesses the flexibility to adapt to different atrial geometries and pathologies.

The flexible, elongated ablating element 176 can also be used with a Category 1 Element to "touch up" or perfect incomplete lesions patterns formed by the Category 1 Element.

FIG. 28 shows one preferred embodiment of a flexible, elongated ablating element 176(1). The element 176(1) comprises a flexible body 190 made of a polymeric material, such as polyethylene. As shown by solid and phantom lines in FIG. 28, the body 190 can be flexed to assumed various curvilinear shapes, as just described.

The body 190 carries on its exterior surface a pattern of closely spaced electrically conductive regions 192. The conductive regions 192 can be formed by coating the polymeric material of the body 190 with a conductive material. The portions 194 of the body 192 between the conductive regions 192 are preserved free of the conductive material. These regions 194 are thereby electrically nonconductive.

Coating of the conductive regions 192 may be accomplished by conventional sputter coating techniques, using gold, for example. Alternatively, an initial layer of titanium can be applied followed by an outer coating of gold using an ion beam assisted deposition (IBAD) process.

Alternatively, the regions 192 can comprise metallic rings of conductive material, like platinum. In this embodiment, the rings are pressure fitted about the body 190, which is made from a nonconductive flexible plastic material, like polyurethane or polyethylene. The portions of the body 190 between the rings comprise the nonconductive regions 194.

The conductive regions 192 of the body 190 are attached to signal wires (not shown) to conduct ablating energy to one or more of the conductive regions 192.



US 6,241,754 B1

25

The conductive regions 192 can be operated in a unipolar ablation mode, as FIG. 29 shows, or in a bipolar ablation mode, as FIG. 30 shows.

In the unipolar ablation mode (as FIG. 29 shows), each conductive region 192 individually serves as an energy transmitting electrode. The energy transmitted by each conductive region 192 flows to an external indifferent electrode on the patient (not shown), which is typically an epidermal patch. In this mode, each conductive region 192 creates its own discrete lesion. However, due to the close spacing of the conductive regions 192, the lesions overlap to create a single adjoining lesion pattern.

In the bipolar ablation mode (as FIG. 30 shows), the conductive regions 192 are configured as alternating polarity transmitting electrode regions. A first region is designated "+", and a second region is designated "-". In this mode, ablating energy flows between the "+" electrode regions and the "-" electrode regions. This mode creates lesions that span adjacent electrode regions. As in the unipolar mode, the lesions overlap to form a single adjoining lesion pattern.

When operated in either the unipolar ablation mode or the bipolar ablation mode, the element 176(1) forms a contiguous lesion pattern P in myocardial tissue MT along the particular curvature of the body 190. Depending upon the curvature of the body 190, the formed lesion pattern P1 in the tissue MT can be straight (as FIG. 31 shows), or the formed lesion pattern P2 in the tissue MT can be curved (as FIG. 32 shows). Both lesion patterns P1 and P2 result from the conformation between the atrial wall and the body 190.

The element 176(1) operates with higher impedance, higher efficiencies, and is more sensitive to tissue contact when operated in the bipolar ablation mode than when operated in the unipolar mode.

The lesion pattern created is approximately twice as wide as the body 190. The lesion pattern can be made wider by using wider conductive regions 192.

In a representative embodiment, the body 190 is about 2.5 mm in diameter. Each conductive region 192 has a width of about 3 mm, and each nonconductive region 194 also has a width of about 3 mm. When eight conductive regions 192 are present and activated with 30 watts of radiofrequency energy for about 30 seconds, the lesion pattern measures about 5 cm in length and about 5 mm in width. The depth of the lesion pattern is about 3 mm, which is more than adequate to create the required transmural lesion (the atrial wall is generally less than 2 mm).

Furthermore, by selectively not activating one or more adjacent regions 192, one can create a lesion pattern that is not adjoining, but is interrupted along the length of the body 190. The interruptions in the lesion pattern provide pathways for propagating the activation wavefront and serve to control pulse conduction across the lesion pattern.

For example, as FIG. 33 shows, the body 190 includes an alternating pattern of conductive regions 192 and nonconductive regions 194, each region 192/194 being of equal width. By activating some conductive regions 192 (showed by "A" in FIG. 33), while not activating other conductive regions (showed by "N" in FIG. 33), an interrupted pattern of lesions PI can be made in myocardial tissue MT, as FIG. 34 shows. As FIG. 34 also shows, lesions of different length can be formed along the interrupted pattern PI, depending upon the number of adjacent conductive regions 192 activated.

Of course, by varying the curvature of the body 190, the interrupted pattern PI can assume a generally straight path (as FIG. 34 shows), or it can assume a generally curved path, as FIG. 35 shows.

26

FIG. 59 shows a system 298 that couples an ablating energy source 296 to the energy emitting region 192 of the element 176(1). In the illustrated embodiment, the source 296 supplies electromagnetic radiofrequency (RF) energy to the region 192.

The system 298 includes a controller 300. The controller 300 electronically adjusts and alters the energy emitting characteristics of the energy emitting region 192.

The controller 300 can electronically configure the energy emitting region 192 for operation in either a bipolar ablation mode or a unipolar ablation mode.

The controller 300 also can electronically configure the energy emitting region 192 to form lesion patterns having differing physical characteristics. In one mode, the controller 300 configures the energy emitting region 192 to form the continuous lesion pattern P1/P2 shown in FIGS. 31 and 32. In another mode, controller 300 configures the energy emitting region 192 to form a variety of interrupted lesion patterns PI, one of which is shown FIGS. 34 and 35.

The controller 300 includes an input panel 302 for governing the operation of the controller 300. Through the input panel 302, the physician chooses the ablation mode and physical characteristics of the lesion patterns. In response, the controller 300 electronically configures the energy emitting region 192 to operate in the chosen manner. In this way, the system 298 provides the flexibility to choose and then electronically create specially shaped lesions virtually instantaneously (i.e., "on the fly") during an ablation procedure.

The configuration of the controller 300 and associated input panel 302 can vary. FIG. 60 diagrammatically shows one preferred arrangement.

In FIG. 60, the element 176(1) includes seven conductive regions, designated E1 to E7, carried on the body 190. Each conductive region E1 to E7 is electrically coupled to its own signal wire, designated W1 to W7. The indifferent electrode, designated EI in FIG. 60, is also electrically coupled to its own signal wire WI.

In this arrangement, the controller 300 includes a switch  $S_M$  and switches  $S_{E1}$  to  $S_{E7}$  that electrically couple the source 296 to the signal wires W1 to W7. The switch  $S_M$  governs the overall operating mode of the regions E1 to E7 (i.e., unipolar or bipolar). The switches  $S_{E1}$  to  $S_{E7}$  govern the activation pattern of the regions 192.

Each switch  $S_M$  and  $S_{E1}$  to  $S_{E7}$  includes three leads L1; L2; and L3. Electrically, each switch  $S_M$  and  $S_{E1}$  to  $S_{E7}$  serves as three-way switch.

The three-way switches  $S_M$  and  $S_{E1}$  to  $S_{E7}$  are electrically coupled in parallel to the RF energy source 296. The (+) output of the RF source 294 is electrically coupled in parallel by a connector 306 to the leads L1 of the switches  $S_{E1}$  to  $S_{E7}$ . The (-) output of the RF source 294 is electrically directly coupled by a connector 308 to the center lead L2 of the mode selection switch  $S_M$ . A connector 310 electrically couples in parallel the leads L3 of the switches  $S_M$  and  $S_{E1}$  to  $S_{E7}$ .

The center leads L2 of the selecting switch  $S_{E1}$  to  $S_{E7}$  are directly electrically coupled to the signal wires W1 to W7 serving the energy emitting regions E1 to E7, so that one switch  $S_{E(N)}$  serves only one energy emitting region  $E_{(N)}$ .

The lead L1 of the switch  $S_M$  is directly electrically coupled to the signal wire WI serving the indifferent electrode EI.

The input panel 302 carries manually operable toggles  $T_M$  and  $T_{E1}$  to  $T_{E7}$ . One toggle  $T_M$  and  $T_{E1}$  to  $T_{E7}$  is electrically coupled to one switch, respectively  $S_M$  and  $S_{E1}$  to  $S_{E7}$ . When

US 6,241,754 B1

27

manipulated manually by the physician, each toggle  $T_M$  and  $T_{E1 \text{ to } E7}$  can be placed in three positions, designated A, B, and C in FIG. 61.

As FIG. 61 shows, toggle Position A electrically couples leads L1 and L2 of the associated switch. Toggle Position C electrically couples leads L2 and L3 of the associated switch. Toggle Position B electrically isolates both leads L1 and L3 from lead L2 of the associated switch.

Position B of toggle  $T_M$  and toggles  $T_{E1 \text{ to } E7}$  is an electrically OFF or INACTIVATED Position. Positions A and B of toggle  $T_M$  and toggles  $T_{E1 \text{ to } E7}$  are electrically ON or ACTIVATED Positions.

By placing toggle  $T_M$  in its Position B (see FIG. 62), the physician electronically inactivates the controller 300. With toggle  $T_M$  in Position B, the controller 300 conveys no RF energy from the source 296 to any region 192, regardless of the position of toggles  $T_{E1 \text{ to } E7}$ .

By placing toggle  $T_M$  in Position A (see FIG. 63), the physician electronically configures the controller 300 for operation in the unipolar mode. With toggle  $T_M$  in Position A, the center lead L2 of switch  $S_M$  is coupled to lead L1, electronically coupling the indifferent electrode EI to the (-) output of the source 296. This configures the indifferent electrode EI to receive RF energy.

With toggle  $T_M$  in Position A, the physician electronically configures the regions E1 to E7 to emit RF energy by placing the associated toggle  $T_{E1 \text{ to } E7}$  in Position A (as FIG. 63 shows). This electronically couples each region E1 to E7 to the (+) output of the source 296, configuring the regions E1 to E7 to emit energy. The indifferent electrode EI receives the RF energy emitted by these regions E1 to E7.

With toggle  $T_M$  in Position A and all toggles  $T_{E1 \text{ to } E7}$  in their Positions A, a continuous, unipolar lesion pattern results, as FIG. 63 shows (like that shown in FIGS. 31 and 32).

With toggle  $T_M$  in Position A, the physician can select to electronically interrupt the flow of RF energy one or more regions E1 to E7, by placing the associated toggles  $T_{E1 \text{ to } E7}$  in Position B (see FIG. 64, where the flow is interrupted to regions E3 and E4). As FIG. 64 shows, this configuration forms lesions where the regions E1; E2; and E5 to E7 emit RF energy next to lesion-free areas where the selected region or regions E3 and E4 emit no RF energy. An interrupted, unipolar lesion pattern results (like that shown in FIGS. 34 and 35).

Placing toggle  $T_M$  in Position C (see FIG. 65) electronically isolates the indifferent electrode EI from the regions E1 to E7. This configures the controller 300 for operation in the bipolar mode.

With toggle  $T_M$  placed in Position C, the physician can electronically alter the polarity of adjacent energy emitting regions E1 to E7, choosing among energy emitting polarity (+), energy receiving polarity (-), or neither (i.e., inactivated).

Toggles  $T_{E1 \text{ to } E7}$  placed in Position A electronically configure their associated regions E1 to E7 to be energy emitting (+). Toggles  $T_{E1 \text{ to } E7}$  placed in Position C electronically configure their associated regions E1 to E7 to be energy receiving (-). Toggles  $T_{E1 \text{ to } E7}$  placed in Position B electronically inactivate their associated regions E1 to E7.

With toggle  $T_M$  in Position C, sequentially alternating the toggles  $T_{E1 \text{ to } E7}$  between Positions A and C (as FIG. 65 shows) creates a continuous, bipolar lesion pattern. In FIG. 65, regions E1; E3; E5; and E7 are energy transmitting (+), and regions E2; E4; and E6 are energy receiving (-).

28

With toggle  $T_M$  in Position C, moving selected one or more toggles  $T_{E1 \text{ to } E7}$  to Position B (thereby inactivating the associated regions E1 to E7), while sequentially alternating the remaining toggles  $T_{E1 \text{ to } E7}$  between Positions A and C (as FIG. 66 shows) creates an interrupted, bipolar lesion pattern. In FIG. 66, regions E3 and E4 are inactivated; regions E1; E5; and E7 are energy transmitting (+); and regions E2 and E6 are energy receiving (-).

FIG. 36 shows another preferred embodiment of a flexible, elongated ablating element 176(2). The element 176(2) comprises a flexible body core 196 made of a polymeric material, such as polyethylene or Teflon plastic. As shown by solid and phantom lines in FIG. 36, the core body 196 can be flexed to assumed various curvilinear shapes.

In this embodiment, the core body 196 carries a closely wound, spiral winding 198.

The winding 198 can comprise a single length of electrically conducting material, like copper alloy, platinum, or stainless steel. The electrically conducting material of the winding 198 can be further coated with platinum or gold to improve its conduction properties and biocompatibility.

The winding 198 can also comprise a single length of an electrically nonconducting material, to which an electrically conducting coating, like platinum or gold, has been applied.

The winding 198 can also comprise wound lengths of an electrically conducting material juxtaposed with wound lengths of an electrically nonconducting material. In this way, the winding 198 can form predetermined lesion patterns.

When attached to one or more signal wires (not shown), the regions of the winding 198 that comprise electrically conducting materials emit ablating energy. The winding 198 serves as an elongated flexible electrode that can be selectively flexed to form a diverse variety of long, curvilinear or straight lesion patterns.

Like the element 176(1), the element 176(2) can be operated both in a unipolar ablation mode (as FIG. 37 shows) and in a bipolar ablation mode (as FIG. 38 shows).

In the unipolar ablation mode (as FIG. 37 shows), the winding 198 is formed from a single length of electrically conductive wire. The winding 198 serves as an energy transmitting electrode (as designated by a positive charge in FIG. 37). In this arrangement, the winding 198 transmits energy into the tissue and to an external indifferent electrode on the patient (not shown) to form a lesion.

In the bipolar ablation mode (as FIG. 38 shows), the winding 198 comprises four wrapped lengths of wire (designated 198(1); 198(2); 198(3); and 198(4) in FIG. 38). The wires 198(1) and 198(3) are each electrically conducting. The wire 198(2) and 198(4) are not electrically conducting. Instead, wires 198(2) and 198(4) serve to insulate the wires 198(1) and 198(3) from each other.

In the bipolar ablation mode, energy is applied to so that the turns of the wire 198(1) serve an energy transmitting regions (designated as "+"), while the turns of the wires 198(3) serve as energy receiving electrode regions (designated as "-").

In this mode, ablating energy flows from a transmitting electrode (positive) turn of wire 198(1) to an adjacent receiving electrode (negative) turn of wire 198(3), across the insulating intermediate wires 198(2) and 198(4).

When operated in either unipolar or bipolar mode, the element 176(2), like element 176(1), forms a contiguous lesion pattern P in myocardial tissue MT along the curvature



US 6,241,754 B1

29

of the body 196. As FIG. 39 shows, the lesion pattern P1 can follow a straight path, or the lesion pattern P2 can follow a curved path, depending upon the shape given to the body 196.

Element 176(2) allows the manufacture of a curvilinear ablation element of a smaller diameter than element 176(1). The smaller diameter allows for the creation of a contiguous lesion pattern of less width and depth. The small diameter of element 176(2) also makes it more flexible and more easily placed and maintained in intimate contact against the atrial wall than element 176(1).

In a representative embodiment, the element 176(2) is about 1.3 mm in diameter, but could be made as small as 1.0 mm in diameter. The element 176(2) is about 5 cm in total length. This element 176(2), when activated with 40 watts of radiofrequency energy for 30 seconds, forms a contiguous lesion pattern that is about 3 mm in width, about 5 cm in length, and about 1.5 mm in depth.

FIGS. 40 to 45 show yet another preferred embodiment of a flexible, elongated ablating element 176(3). Like the other elements 176(1) and 176(2), the element 176(3) comprises a flexible body core 200 made of a polymeric material, such as polyethylene. As shown by solid and phantom lines in FIGS. 40 and 43, the core body 200 can also be flexed to assumed various curvilinear shapes.

In this embodiment, the core body 200 carries one or more elongated, exposed strips 202 of flexible, electrically conducting material. Unlike the circumferential conductive regions 192 of element 176(1) and the circumferential winding 198 of the element 176(2), the strips 202(1) and 202(2) of element 176(3) run parallel along the axis of the core body 200.

As FIGS. 40 to 45 show, the parallel strips 202 and the underlying core body 200 can assume different shapes.

In FIGS. 40 to 42, the core body 200 carries two strips, designated strip 202(1) and 202(2). These strips 202(1) and 202(2) are carried close to each other along the same surface region of the core body 200.

In FIG. 43, the core body 200 carries a single, elongated strip 200 (3). This strip 202(3) has a larger surface area than the individual strips 202(1) and 200(2) (shown in FIGS. 40 to 42). However, as will be discussed later, the strip 202(3) can be operated only in a unipolar ablation mode (thereby requiring an external indifferent electrode), whereas the closely spaced pair of strips 202(1)/(2) can be operated in either a unipolar mode or a bipolar ablation mode.

As FIGS. 44 and 45 show, strips 202(4) and strip 202(5) can occupy all or a significant portion of the core body 200.

In FIG. 44, the strip 200(4) covers the entire exterior surface of the core body 200. It therefore becomes an elongated variation of the circumferential regions 192 of element 176(1) and the circumferential winding 198 of the element 176(2).

In FIG. 45, multiple strips 200(5) segment the core body 200 into elongated conducting and nonconducting regions.

The strips 202 shown in FIGS. 40 to 45 can be affixed by adhesive or thermal bonding to the exterior surface of the core body 196, as FIGS. 41A/B and 43 to 45 show. Alternatively, the strips 200 can consist of coextruded elements of the core body 200 (as FIGS. 40 and 42A/B show).

The strips 202 can comprise elongated lengths of an electrically conducting material, like copper alloy. The strips can be further coated with platinum or gold to improve conduction properties and biocompatibility. The strips 202 can also comprise a single length of an electrically noncon-

30

ducting material to which an electrically conducting coating, like platinum or gold, has been applied.

Alternatively, the strips 202 can comprise coatings applied by conventional sputter coating or IBA techniques.

The strips 202 can also have differing cross sectional shapes. In FIGS. 41A/B, the strips 202(1) and 202(2) each have a circular cross section and thereby present a generally rounded contact zone with the tissue. The FIGS. 42A/B; 44; and 45, the strips 202 have a rectilinear cross section and thereby present a generally flat contact zone with the tissue.

As FIGS. 41A/B and 42A/B also show, the cross sectional shape of the underlying core body 200 can also vary. In FIGS. 41A/B, the core body 200 has a generally circular cross section. In FIGS. 42A/B, the core body 200 has a generally flattened region 204, upon which the strips 202(1) and 202(2) are laid. The flattened region 204 provides more stable surface contact.

The strips 202(1) and 202(2) can be operated in both a unipolar ablation mode (as FIGS. 41A and 42A show) and in a bipolar ablation mode (as FIGS. 41B and 42B show), depending upon the efficiencies required, as before discussed.

When operated in the unipolar mode (see FIGS. 41A and 42A), each strip 202(1) and 202(2) serves as elongated, flexible energy emitting electrode (designated with positive charges). The strips 202(3)/(4)/(5) (FIGS. 43 to 45) similarly operate as elongated flexible electrodes in the unipolar ablation mode.

When operated in the bipolar mode (see FIGS. 41B and 42B), one strip 202(1)/(2) serves as an elongated energy emitting electrode (designated with a positive charge), while the other strip serves as an elongated indifferent electrode (designated with a negative charge).

No matter its particular shape, the element 176(3) forms a contiguous, elongated lesion P in myocardial tissue MT arrayed along the curvature of the body 200.

As FIG. 46 shows, the lesion P1 in the tissue MT can follow a straight path, or the lesion P2 can follow a curved path, depending upon the shape of the body 200. In the multiple strip embodiments shown in FIGS. 40 to 42, the width of the lesion P1 or P2 can be controlled by the spacing between the strips 202(1)/(2) and 202(5). In the single strip embodiments shown in FIGS. 43 to 45, the width of the lesion P1 or P2 can be controlled by the width of the strips 202(3)/202(4)/202(5) themselves.

FIGS. 47 and 48 show still another preferred embodiment of a flexible, elongated ablating element 176(4). Like the other elements 176(1) to (3), the element 176(4) comprises a flexible body core 204 made of a polymeric material, such as polyethylene. As shown by solid and phantom lines in FIG. 40, the core body 204 can also be flexed to assumed various curvilinear shapes.

In this embodiment, a thin, flat ribbon 206 of material is spirally wound about and affixed to the core body 204.

The ribbon 206 comprises a polymeric material to which an electrically conducting coating, like platinum or gold, has been applied. Alternatively, the spiral electrically conductive ribbon 206 can be applied directly on the core body 204 using an ion beam assisted deposition (IBAD) process.

The spiral ribbon 206 serves as an elongated flexible electrode. Like the preceding element 176(1), the element 176(4) can be operated to emit ablating energy to form a pattern P1 or P2 of closely spaced lesions arrayed along the curvature of the body 204, as FIGS. 31 and 32 show. The element 176(4) can be operated only in a unipolar ablation mode in association with an external indifferent electrode.

US 6,241,754 B1

31

FIGS. 49 and 50 show another preferred embodiment of a flexible, elongated ablating element 176(5). Unlike the other elements 176(1) to (4), the element 176(5) comprises a flexible body core 208 made of an electrically conducting material. As shown by solid and phantom lines in FIG. 42, the core body 208 can be flexed to assumed various curvilinear shapes.

In this embodiment, the core body 208 is partially enclosed by a shroud 210 made from an electrically non-conducting material, like polyethylene. The shroud 210 includes an elongated opening 212 that exposes the underlying core body 208. The shroud 210 electrically insulates the core body 208, except that portion 214 exposed through the opening 212.

When ablating energy is applied to the core body 208, only the portion 214 exposed through the window 212 emits energy. The rest of the shroud 214 blocks the transmission of the ablating energy to the tissue. The element 176(5) creates a continuous elongated ablation pattern, like that shown in FIG. 46 as created by the elongated strip 202(3) shown in FIG. 37.

FIG. 51 shows an ablation probe 246 that carries another type of flexible, elongated ablating element 176(6). In many respects, the probe 246 is like the probe 180 shown in FIGS. 27 and 36.

The element 176(6) comprises a flexible body core 222 made of a polymeric material, such as polyethylene or Teflon plastic. The core 222 is carried at the distal end of the catheter body 248 of the associated probe 246.

The probe 246 includes a handle 250 that carries a steering mechanism 252 for flexing the core body 222 into various curvilinear shapes, as shown by solid and phantom lines in FIG. 51. As FIG. 55 shows, the steering mechanism 252 is like the steering mechanism shown in FIG. 17, already described.

As FIG. 53 shows, the core body 222 carries a closely wound, spiral winding 224, like that shown in FIG. 36. The winding 224 comprises a single length of electrically conducting material, like copper alloy or platinum stainless steel. The electrically conducting material of the winding 224 can be further coated with platinum or gold to improve its conduction properties and biocompatibility.

Alternatively, the winding 224 can also comprise a single length of an electrically nonconducting material, to which an electrically conducting coating, like platinum or gold, has been applied.

When attached to one or more signal wires (not shown), the winding 224 emits ablating energy into the tissue and to an external indifferent electrode on the patient (not shown). The winding 224 thereby serves as an elongated flexible electrode that can be selectively flexed to form a diverse variety of long, curvilinear or straight lesion patterns, like those shown in FIG. 39.

Unlike the element 176(2) shown in FIG. 36, the ablating element 176(6) includes a sliding sheath 226 carried about the winding 224 (see FIGS. 51 and 52). The sheath 226 is made of an electrically nonconducting material, like polyimide.

The interior diameter of the sheath 226 is greater than the exterior diameter of the winding 224, so it can be moved axially fore and aft along the exterior of the winding 224, as shown by the arrows in FIG. 52.

As FIG. 53 also shows, the sheath 226 carries a retaining ring 228 on its proximal end. A stylet 230 is attached to the retaining ring 228. The stylet 230 extends from the retaining

32

ring 228, through the associated catheter body 248, and attaches to a sliding control lever 254 carried on the probe handle 250 (see FIG. 55).

Fore and aft movement of the control lever 254 (as arrows in FIG. 55 show) imparts, through movement of the stylet 230, fore and aft movement to the sheath 226 in a one-to-one relationship.

The sheath 226 carries a strip 234 of electrically conducting material at its distal end (see FIG. 53). The strip 234 includes a contact region 236 that extends through the sheath 226 to contact one or more turns of the underlying winding 224.

A signal wire 238 is electrically connected to the strip 234. The signal wire 238 conveys ablating energy from the source to the winding 224 through the contact region 236. The region 236 maintains electrical contact with the winding 224 during movement of the sheath 226.

The signal wire 238 and strip 234 are enclosed upon the sheath 226 by a layer of electrically insulating shrink tubing 240. A nonconducting adhesive is also used to electrically insulate the signal wire 238 and stylet 230 connections.

By moving the sheath 226 forward, the sheath 226 progressively covers more of the winding 224. Similarly, by moving the sheath 226 rearward, the sheath 226 progressively exposes more of the winding 224.

The impedance of the ablating element 176(6) varies with the area of the winding 224 exposed beyond the sheath 226. As progressively less area of the winding 224 is exposed beyond the sheath 226, the impedance of the ablating element 176(6) becomes progressively greater. Conversely, as progressively more area of the winding 224 is exposed beyond the sheath 226, the impedance of the ablating element 176(6) becomes progressively less.

By manipulating the control mechanism 232 on the handle 184, the physician can thereby remotely adjust the impedance of the ablating element 176(6). In this way, the physician gains direct control over the efficiency of the ablation process.

By moving the sheath 226 to expose more or less of the winding 224, the physician also gains direct control over the size of the ablating element 176(6) and, thus, over the size of the curvilinear lesion itself.

By selecting materials of different stiffness for the sheath 226, one can also alter the bending characteristics of the winding 224.

As FIG. 56 shows, when the sheath 226 is made of a non rigid material that less flexible than the underlying core body 222, movement of the sheath 226 over the core body 222 imparts more total stiffness to the body 222. In this way, the physician can alter the shape of the curvilinear lesion. The physician can also gain a greater degree of tissue contact with a stiffer flexible body 222.

As FIG. 57 shows when the sheath 226 is made of a relatively rigid material, movement of the sheath 226 effectively changes the fulcrum point about which the body core 222 curves. The shape of the body 222, when flexed, therefore changes with movement of the sheath 226.

Further details regarding the concepts of using of a movable sheath to varying the flexing characteristics of a steerable catheter are revealed in copending patent application Ser. No. 08/099,843, filed Jul. 30, 1993, and entitled "Variable Curve Electrophysiology Catheter" and copending patent application Ser. No. 08/100,739, filed Jul. 30, 1993 and entitled "Variable Stiffness Electrophysiology Catheter."

US 6,241,754 B1

33

In one preferred construction, the ablating element 176(6) is about 1.2 to 2.0 mm in diameter and about 5 cm long. The outer diameter of the catheter body 178 that carries the element 176(6) is about 7 French (one French is 0.33 mm). The contact strip 234 measures about 0.05 mm by 0.5 mm by 5 mm.

FIG. 58 shows an alternative ablation element 176(6)', which can be operated in a bipolar ablation mode. The element 176(6)' shares many structural elements with the element 176(6) shown in FIGS. 51 to 54. The common structural elements are identified with the same reference numbers.

Unlike the element 176(6) shown in FIG. 51, the element 176(6)' shown in FIG. 58 includes an operative electrode 242 at the distal tip 225 of the core body 222. Also, unlike the element 176(6) in FIG. 51, the sheath 226 of the element 176(6) carries an operative electrode ring 244.

In use, the electrodes 242 and 244 can be maintained at one polarity, while the winding 224 is maintained at the opposite polarity. This arrangement makes operation in a bipolar ablation mode possible.

Therefore, along with all the benefits obtained by using the moveable sheath 226 (as already discussed concerning the element 176(6)), the element 176(6)' can also obtain the added benefits that bipolar mode operation provides.

The features of the invention are set forth in the following claims.

We claim:

1. A method of creating a lesion pattern in heart tissue, comprising the steps of:

introducing an elongate element, having an energy emitting portion that can be flexed along its length from a generally straight shape into a curvilinear shape, into the heart;

positioning the element in a first position adjacent to a first surface within the heart while maintaining the energy emitting portion in a desired shape;

applying ablating energy to the energy emitting portion while maintaining the element in the first position to form an elongate lesion having a shape corresponding to the shape of the element;

changing at least one of the shape of the element and the position of the element within heart; and

forming a convoluted lesion pattern by repeating the positioning, applying and changing steps.

2. A method as claimed in claim 1, wherein the step of forming a convoluted lesion pattern comprises forming a lesion pattern including elongated straight lesions and elongated curvilinear lesions by repeating the positioning, applying and changing steps.

3. A method as claimed in claim 1, wherein the step of introducing an elongate element into the heart comprises introducing an elongate element into an atrium.

4. A method as claimed in claim 3, wherein the step of forming a convoluted lesion pattern comprises forming a lesion pattern including elongated straight lesions and elongated curvilinear lesions that direct electrical impulses within the atrial myocardium along a path that activates the atrial myocardium while interrupting reentry circuits that, if not interrupted, would cause fibrillation, by repeating the positioning, applying and changing steps.

5. A method as claimed in claim 1, wherein in the step of applying ablating energy comprises applying radiofrequency electromagnetic energy.

6. A method as claimed in claim 1, further comprising the step of:

34

introducing a viewing probe into the heart to monitor the position of the element during the step of positioning the element.

7. A method as claimed in claim 1, wherein the step of introducing the element into the heart comprises introducing the element through a vascular approach without opening the heart.

8. A method of creating a lesion pattern in heart tissue, comprising the steps of:

introducing a bendable spline having an energy emitting element into the heart, the bendable spline having a normally curvilinear configuration and being collapsible in response to a compression force;

positioning the bendable spline in a first position adjacent to a first surface within the heart;

applying ablating energy to the energy emitting portion while maintaining the bendable spline in the curvilinear configuration to form an elongate lesion having a shape corresponding to the shape of the energy emitting region;

changing the position of the bendable spline within heart; and

forming a convoluted lesion pattern by repeating the positioning, applying and changing steps.

9. A method as claimed in claim 8, wherein the step of introducing a bendable spline into the heart comprises collapsing the bendable spline, inserting the bendable spline into the heart, and expanding the bendable spline into the curvilinear configuration after the bendable spline is within the heart.

10. A method as claimed in claim 9, wherein the step of inserting the bendable spline into the heart comprises introducing the bendable spline through a vascular approach without opening the heart.

11. A method as claimed in claim 8, wherein the step of forming a convoluted lesion pattern comprises forming a lesion pattern including elongated straight lesions and elongated curvilinear lesions by repeating the positioning, applying and changing steps.

12. A method as claimed in claim 8, wherein the step of introducing a bendable spline into the heart comprises introducing a bendable spline into an atrium.

13. A method as claimed in claim 12, wherein the step of forming a convoluted lesion pattern comprises forming a lesion pattern including elongated straight lesions and elongated curvilinear lesions that direct electrical impulses within the atrial myocardium along a path that activates the atrial myocardium while interrupting reentry circuits that, if not interrupted, would cause fibrillation, by repeating the positioning, applying and changing steps.

14. A method as claimed in claim 8, wherein in the step of applying ablating energy comprises applying radiofrequency electromagnetic energy.

15. A method as claimed in claim 8, further comprising the step of:

introducing a viewing probe into the heart to monitor the position of the bendable spline during the step of positioning the bendable spline.

16. A method as claimed in claim 8, wherein the step of introducing a bendable spline into the heart comprises introducing a plurality of bendable splines arranged in a three-dimensional array into the heart.

17. A method as claimed in claim 8, wherein the step of introducing a bendable spline into the heart comprises introducing a loop structure into the heart.



US 6,241,754 B1

35

18. An apparatus for ablating tissue, comprising:

a guide element defining a distal end and a proximal end;  
a substantially circular support body associated with the  
distal end of the guide element;

a plurality of electrically conductive regions carried by  
the substantially circular support body with a plurality  
of non-conducting regions therebetween;

an indifferent electrode in spaced relation to the guide  
element and adapted to be located on the exterior of the  
body; and

a source of ablation energy operably connected to the  
electrically conducting regions and adapted to simulta-  
neously supply energy to the plurality of electrically  
conducting regions such that each of the electrically  
conductive regions transmits energy through a con-  
tacted tissue area to the indifferent electrode.

19. An apparatus as claimed in claim 18, wherein a  
portion of the substantially circular support body abuts the  
distal end of the guide element.

20. A method of creating a lesion pattern in heart tissue,  
comprising the steps of:

introducing an element into the heart having a lesion  
creating portion that can be flexed along its length from  
a generally straight shape into a curvilinear shape;

positioning the element in a first position adjacent to a first  
surface within the heart while maintaining the lesion  
creating portion in a desired shape;

creating a lesion with the lesion creating portion while  
maintaining the element in the first position to form an  
elongate lesion having a shape corresponding to the  
shape of the element;

changing at least one of the shape of the element and the  
position of the element within heart; and

forming a convoluted lesion pattern by repeating the  
positioning, creating and changing steps.

21. A method as claimed in claim 20, wherein the step of  
forming a convoluted lesion pattern comprises forming a  
lesion pattern including elongated straight lesions and elon-  
gated curvilinear lesions that direct electrical impulses  
within the atrial myocardium along a path that activates the  
atrial myocardium while interrupting reentry circuits that, if  
not interrupted, would cause fibrillation, by repeating the  
positioning, actuating and changing steps.

22. A method as claimed in claim 20, wherein the step of  
introducing an element having a lesion creating portion  
comprises introducing an element having an energy emitting  
portion and the step of creating a lesion with the lesion  
creating portion comprises transmitting radiofrequency elec-  
tromagnetic energy through the lesion creating portion.

23. A method as claimed in claim 20, wherein the step of  
introducing the element into the heart comprises introducing  
the element through a vascular approach without opening  
the heart.

24. A method of creating a lesion in heart tissue, com-  
prising the steps of:

introducing a substantially circular energy emitting struc-  
ture into the heart;

positioning the energy emitting structure such that it abuts  
an orifice within the heart; and

applying ablating energy to the heart tissue with the  
energy emitting structure while the energy emitting  
structure is abutting the orifice to form a continuous  
elongate lesion having a substantially circular shape.

25. A method as claimed in claim 24, wherein the orifice  
comprises one of the superior vena cava, the inferior vena  
cava and a pulmonary vein.

36

26. A method as claimed in claim 24, wherein the step of  
introducing a substantially circular energy emitting structure  
into the heart comprises collapsing the substantially circular  
energy emitting structure, inserting the substantially circular  
energy emitting structure into the heart, and expanding the  
substantially circular energy emitting structure after the  
substantially circular energy emitting structure is within the  
heart.

27. A method as claimed in claim 26, wherein the step of  
introducing a substantially circular energy emitting structure  
into the heart comprises inserting the substantially circular  
energy emitting structure through a vascular approach with-  
out opening the heart.

28. A method as claimed in claim 24, wherein the step of  
introducing a substantially circular energy emitting structure  
into the heart comprises introducing a bendable loop struc-  
ture that supports at least one energy emitting element into  
the heart.

29. A method as claimed in claim 24, wherein the step of  
introducing a substantially circular energy emitting structure  
into the heart comprises introducing a bendable loop struc-  
ture that supports a plurality of spaced energy emitting  
elements into the heart.

30. A method as claimed in claim 24, wherein the step of  
introducing a substantially circular energy emitting structure  
into the heart comprises introducing an annular structure that  
supports at least one energy emitting element into the heart.

31. A method as claimed in claim 24, wherein the step of  
introducing a substantially circular energy emitting structure  
into the heart comprises introducing an inflatable structure  
that supports at least one energy emitting element into the  
heart.

32. A method as claimed in claim 24, wherein the step of  
positioning the energy emitting structure comprises posi-  
tioning the energy emitting structure such that it encircles  
the orifice.

33. A method as claimed in claim 24, wherein the step of  
applying ablating energy to the heart tissue comprises apply-  
ing electromagnetic energy to the heart tissue.

34. A method of creating a lesion in heart tissue, com-  
prising the steps of:

introducing a tissue ablation structure having a shape  
corresponding to an orifice within the heart;

positioning the tissue ablation structure such that it abuts  
the orifice; and

ablating tissue with the tissue ablation structure while the  
tissue ablation structure is abutting the orifice to form  
a continuous elongate lesion around the orifice.

35. A method as claimed in claim 34, wherein the orifice  
comprises one of the superior vena cava, the inferior vena  
cava and a pulmonary vein.

36. A method as claimed in claim 34, wherein the step of  
introducing a tissue ablation structure into the heart com-  
prises collapsing the tissue ablation structure, inserting the  
tissue ablation structure into the heart, and expanding the  
tissue ablation structure after the tissue ablation structure is  
within the heart.

37. A method as claimed in claim 34, wherein the step of  
introducing a tissue ablation structure into the heart com-  
prises inserting the tissue ablation structure through a vas-  
cular approach without opening the heart.

38. A method as claimed in claim 34, wherein the step of  
introducing a tissue ablation structure into the heart com-  
prises introducing a bendable loop structure that supports at  
least one tissue ablation element into the heart.

39. A method as claimed in claim 34, wherein the step of  
introducing a tissue ablation structure into the heart com-

US 6,241,754 B1

37

prises introducing an annular structure that supports at least one tissue ablation element into the heart.

40. A method as claimed in claim 34, wherein the step of introducing a tissue ablation structure into the heart comprises introducing an inflatable structure that supports at least one tissue ablation element into the heart.

41. A method as claimed in claim 34, wherein the step of positioning the tissue ablation structure comprises positioning the tissue ablation structure such that it encircles the orifice.

42. A method as claimed in claim 34, wherein the step of ablating tissue comprises applying ablating energy to the tissue.

43. A method as claimed in claim 34, wherein the step of ablating tissue comprises applying electromagnetic ablating energy to the tissue.

44. A method as claimed in claim 34, wherein the step of ablating tissue comprises cooling the tissue.

45. An apparatus for creating a lesion in tissue, comprising:

a guide element defining a distal end and a proximal end; a support body carried by the guide element having a size and shape adapted to engage a substantially circular region of tissue associated with an orifice within the heart; and

a tissue ablation device supported on the support body and adapted to form a continuous lesion having a substantially circular shape in the substantially circular region of tissue.

38

46. An apparatus as claimed in claim 45, wherein the support body comprises a collapsible loop structure.

47. An apparatus as claimed in claim 45, wherein the support body comprises an inflatable structure.

48. An apparatus as claimed in claim 45, wherein the support body comprises an annular structure.

49. A apparatus as claimed in claim 45, wherein the support body has a size and shape adapted to engage one of the superior vena cava, the inferior vena cava and a pulmonary vein.

50. An apparatus as claimed in claim 45, wherein the tissue ablation device comprises an energy emitting structure.

51. An apparatus as claimed in claim 50, wherein the energy emitting structure comprises a plurality of spaced conductive regions.

52. An apparatus as claimed in claim 50, wherein the energy emitting structure comprises a continuous conductive region.

53. An apparatus as claimed in claim 50, wherein the energy emitting structure is adapted to emit electromagnetic energy.

\* \* \* \* \*